




Asus X200CA-HCL 1104G Motherboard Replacement

Computer overheats it becomes to hot to touch.

Written By: Svetlana Pimentel

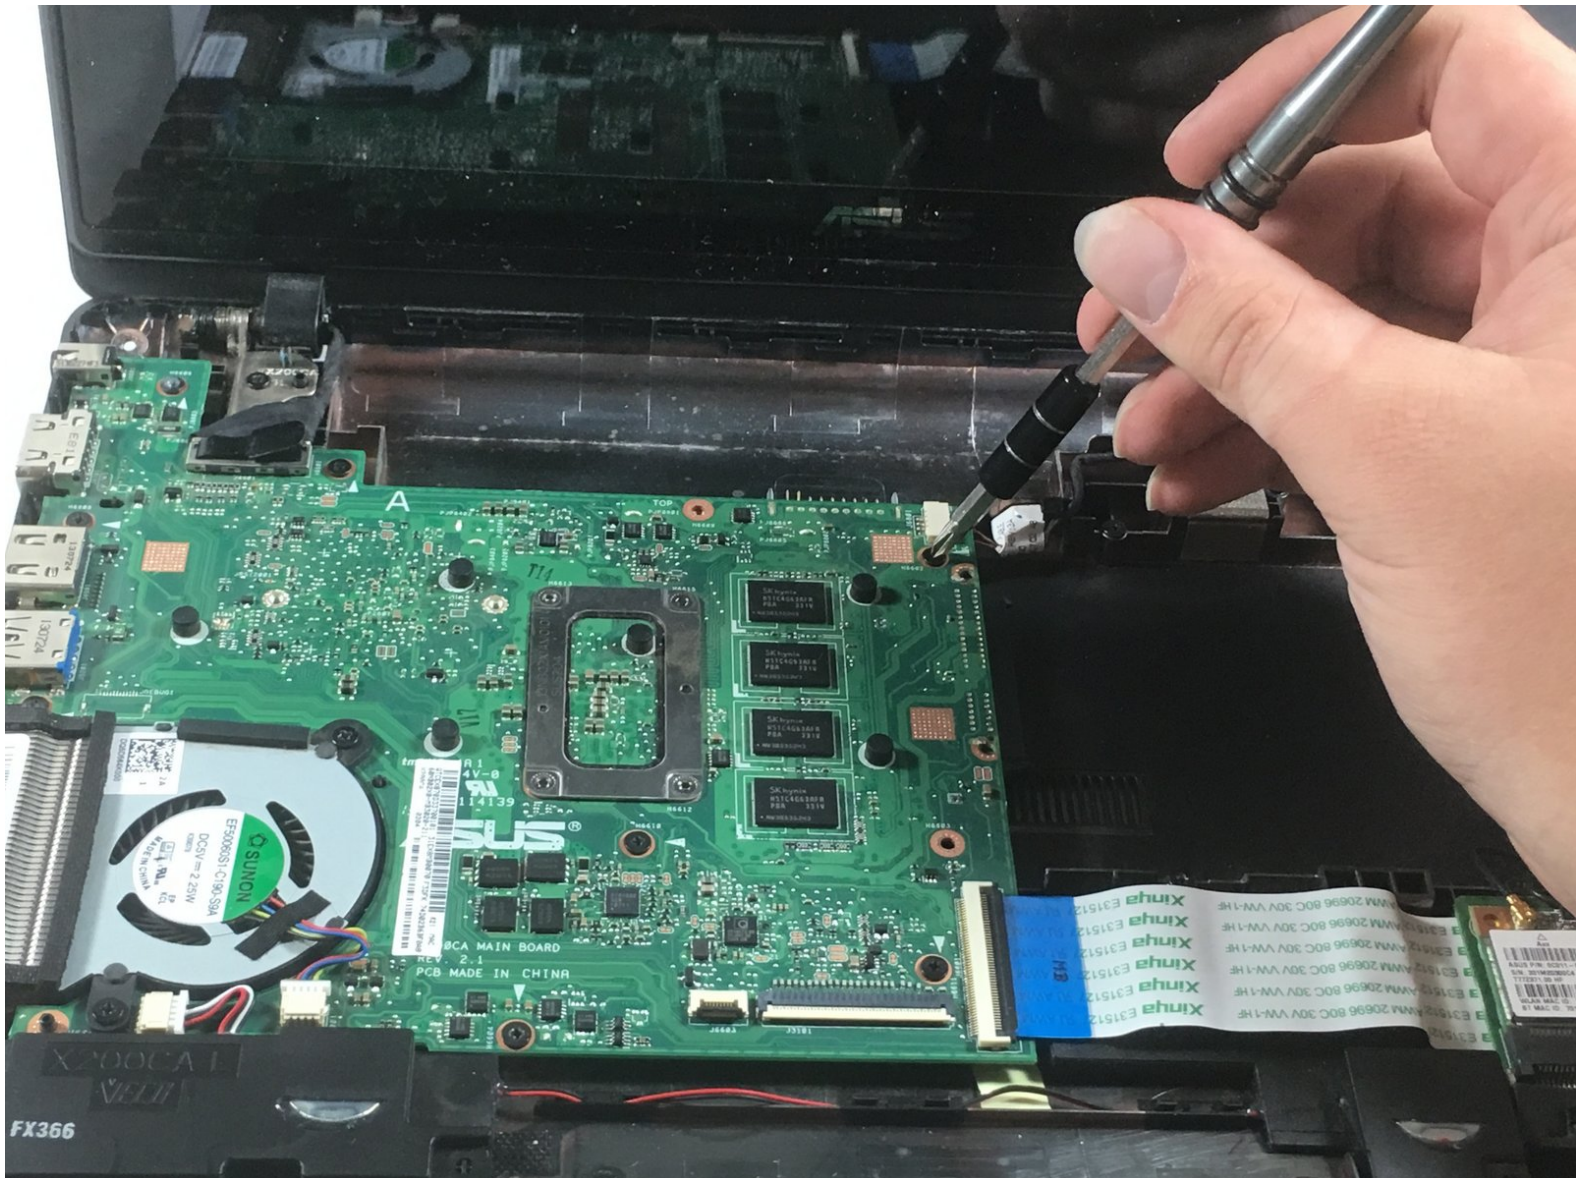



TOOLS:


- [Phillips #0 Screwdriver](#) (1)
- [iFixit Opening Tools](#) (1)

Step 1 — Motherboard




- Using the Phillips 1 screwdriver, remove the laptop's back panel.
- Pry open the Keyboard/Touch pad.
- Use a plastic or metal spudger to separate the keyboard from the back panel and lift the keyboard out of place.

Step 2

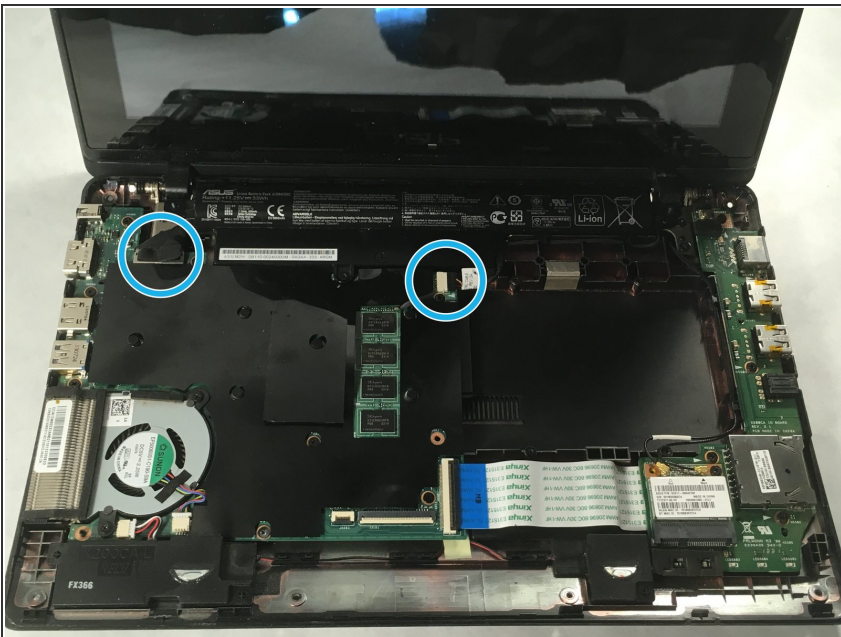

- Detach keyboard and touch screen cables
- These are the cable that are holding the keyboard and touch screen together

Step 3

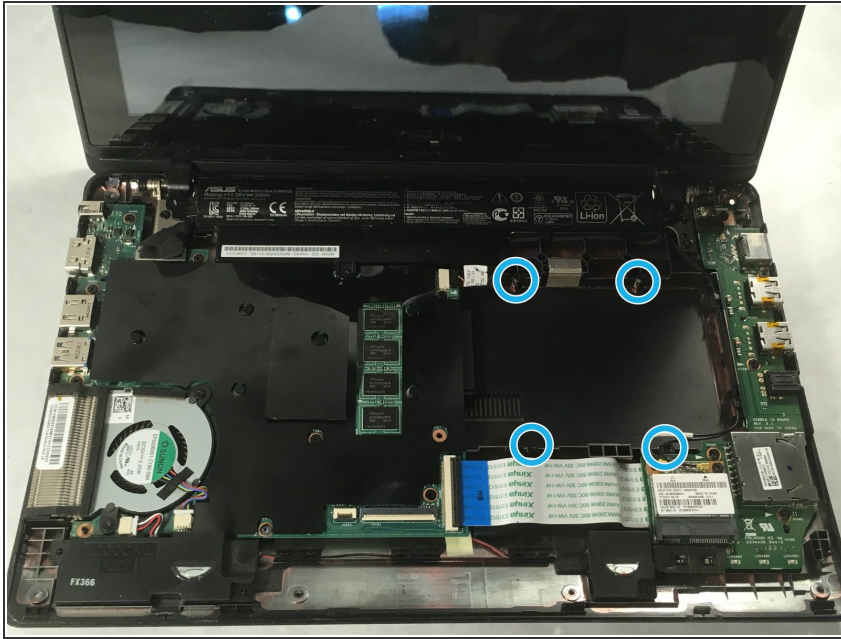

- Remove the following four screws:
Four 4 mm Phillips #0 using a phillips screwdriver.
- Slide out the hard drive

Step 4




- Slide out the hard drive

Step 5



- Detach speaker

Step 6

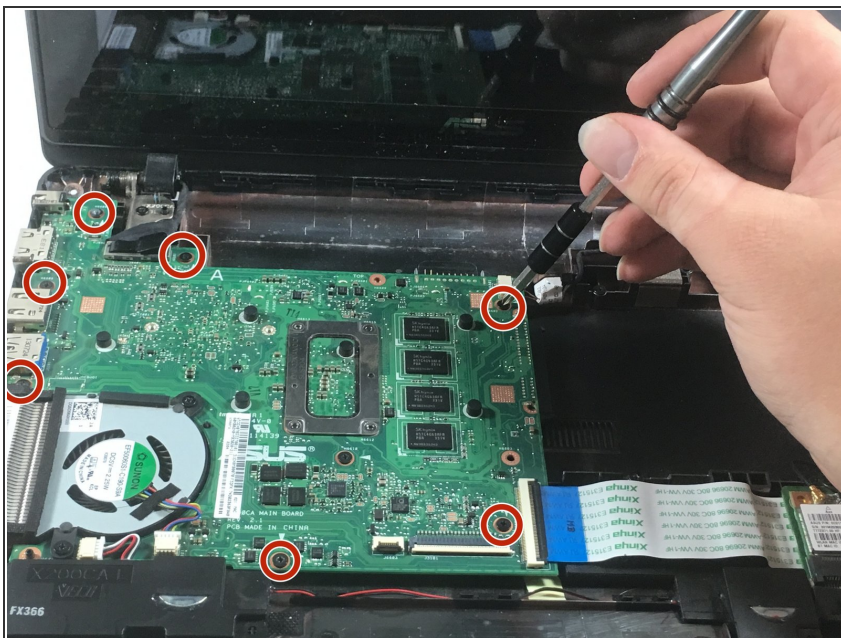

- Remove motherboard screws
- These would be located on the green panel which is the motherboard

Step 7



- Carefully remove motherboard

To reassemble your device, follow these instructions in reverse order.