



Dell Optiplex 7010 Teardown

This guide will show how to take apart this PC.

Written By: Nate Pritzker


INTRODUCTION



This guide will show how to take apart this PC.

TOOLS:


[Phillips #2 Screwdriver](#) (1)

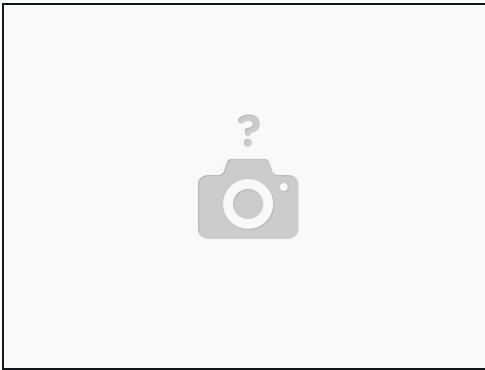Step 1 — Starting Notes




-  Put on your [anti static wrist strap](#) on either your wrist or ankle.
-  It is a good idea to have a part tray to put any screws that you may pull out.

Step 2 — Removal Of the Top Lid

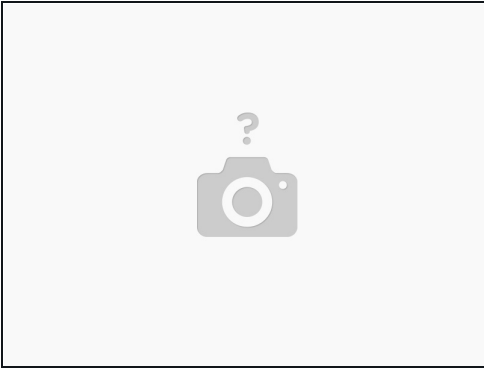


- Pull on the top latch releasing it from the case.

Step 3

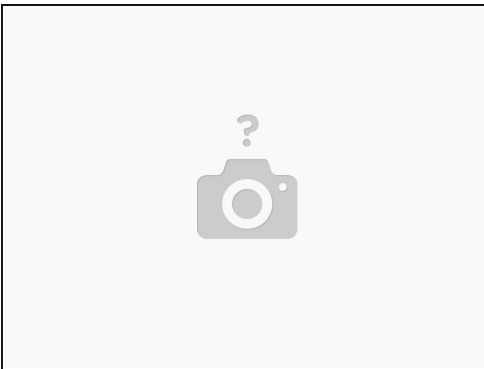


- Unplug the Black and Red Wire from the switch on the edge of the case that sees if the cover is on
- ① If you forget to push the thing on the wire that keeps it in and the whole piece comes out, remove the bottom half and place it back where it came from.

Step 4 — Hard Drive Removal

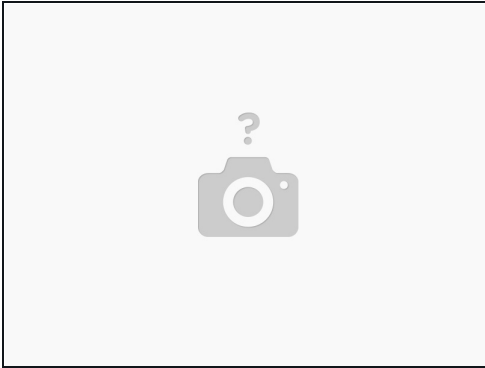


- UnPlug the two cables coming out of the hard drive
- Pull the blue piece of plastic towards the bottom of the pc then lift the hard drive out
- ① If you want, you can remove the black cable going into the motherboard

Step 5 — Front bezel removal

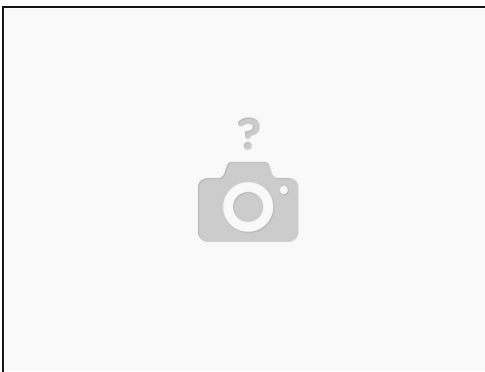


- Pull up on the three tabs, then pull the front bezel off

Step 6 — DVD Drive removal

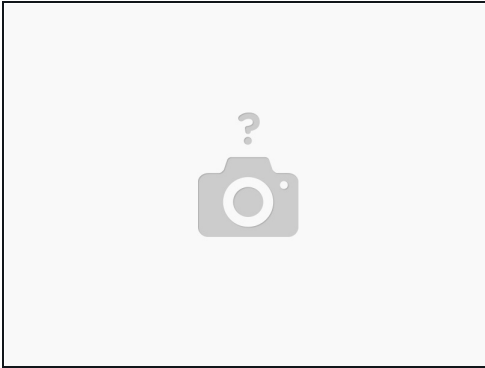


- Follow the same steps in step 4 but you pull the plastic piece up and slide the drive out of the case

Step 7 — Ram Removal

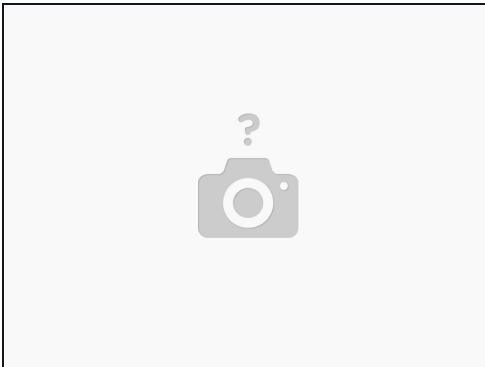

- Pull on the white or black tabs on both sides of the ram and then remove by lifting from the sides.


Step 8 — Front IO Removal

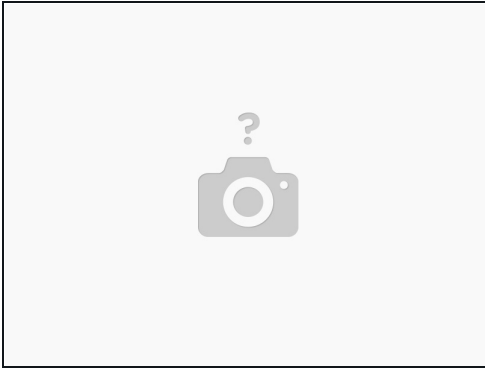

- Use a PH2 screwdriver to remove the screw holding the front IO in. Then push towards the screw that you just removed
- Unplug the cable that says "Front USB" from the motherboard and also pull out the cable that says "Front Cable"

 This will require some force

Step 9 — System Fan And temperature sensor removal

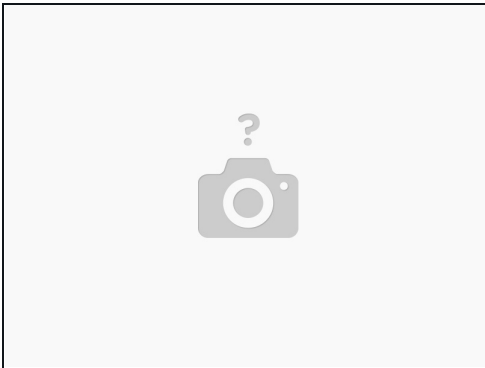

- Pull the top flap off and then squish the two prongs in so then you can pull the sensor off. You will need to unplug the cable which is located near the "Front Panel" cable
- ① You can leave the fan there if you do not want to undo the cable management to fully remove it.

Step 10 — Ending Notes



① If you need me to add more steps, please contact me by asking a question and i will do my best to add it.
