



Pioneer MXT-X366BT Metal Case Replacement

This guide details how to remove and replace the metal sleeve surrounding the radio.

Written By: Blaine Kaiser



INTRODUCTION


This guide shows how to replace the metal sleeve on the Pioneer MXT-X366BT. This guide can act as a prerequisite for replacing the internal components of the radio, although the metal sleeve is also available as a replacement part.

Note: The radio must be removed from the vehicle for this guide. If the radio is currently installed in the vehicle, removal may require special assistance.

TOOLS:

- [Phillips #2 Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
-

Step 1 — Metal Casing

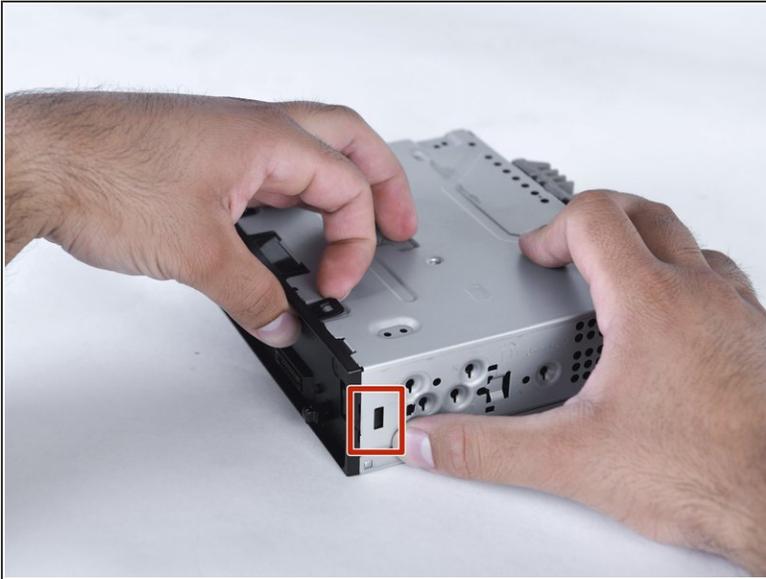

- Apply small amount of pressure inward with a plastic opening tool to release bottom clip.
 - Pry the top clip with the plastic opening tool to release it.
- i** The head unit is symmetrical and has the same amount of clips on the other side.

Step 2




- Remove the face plate holder.

Step 3




- Remove the six 5mm Phillips-head screws with Philips #2 screwdriver.

Step 4

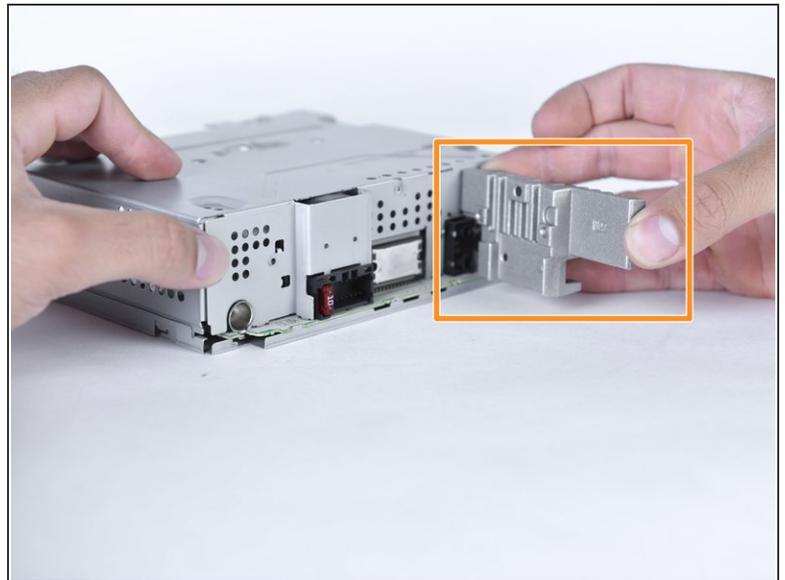


- Remove the inner three 5mm Phillips head screws, with a Phillips #2 screwdriver, attached to the metal backing.
- Remove the metal backing that is now free.

Step 5

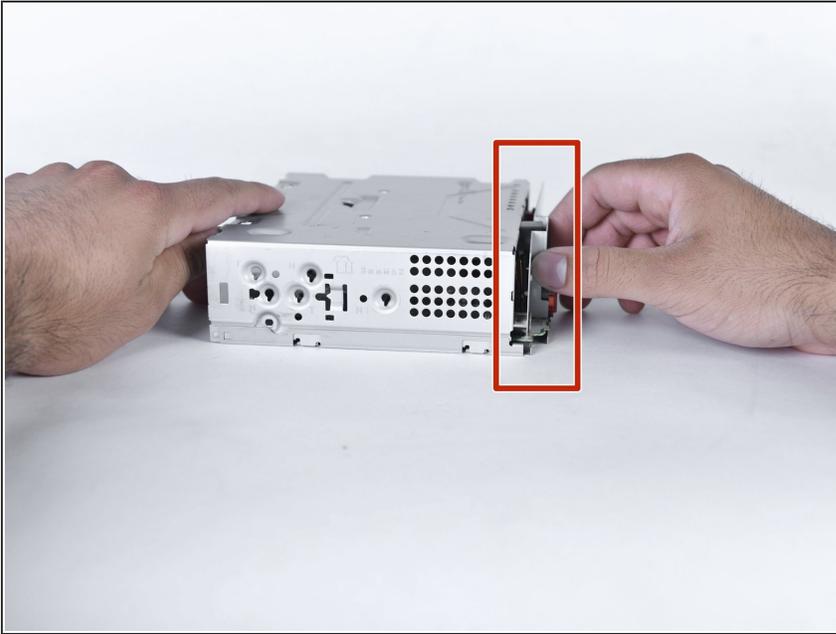


- Carefully slide the metal casing forward.
- ⓘ Metal piece standing is the rear of the head unit.
- ⚠ Edges are sharp.

Step 6

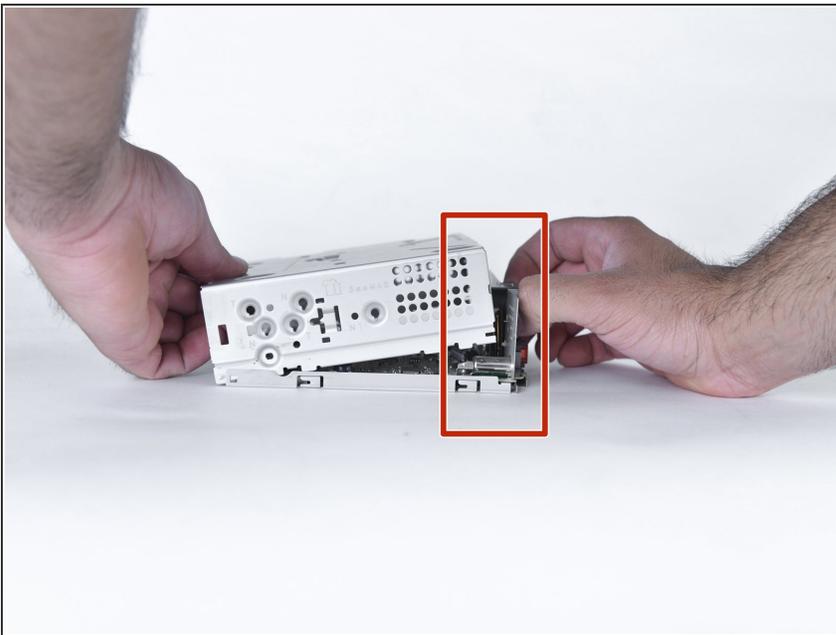

- Lift the metal casing from the rear and pull it away.
- ⚠ Edges are sharp.

Step 7

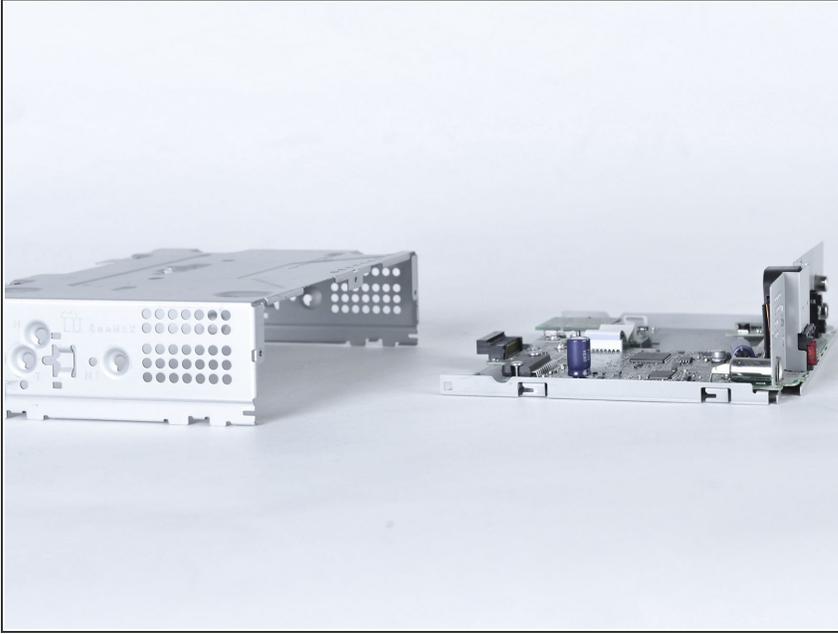

- The metal casing is now fully removed.

To reassemble your device, follow these instructions in reverse order.