



Uwell Crown III Coil Replacement

This is a step-by-step procedure for replacing...

Written By: Abdulrahman Aldossary



INTRODUCTION

This is a step-by-step procedure for replacing an E-cigarette coil that is placed in a tank. The tank holds the E-cigarette flavors (juice). The coil brand is Uwell Crown III and the coil ohms are 4.0 ohms.

TOOLS:

- [Hair Dryer](#) (1)
 - [Towel](#) (1)
-

Step 1 — Coil




- Remove the tank from the E-cigarette by gently unscrewing it by hand.

Step 2



- Take-off the upper lid. This is necessary as the lid will go through cleaning process.

Step 3

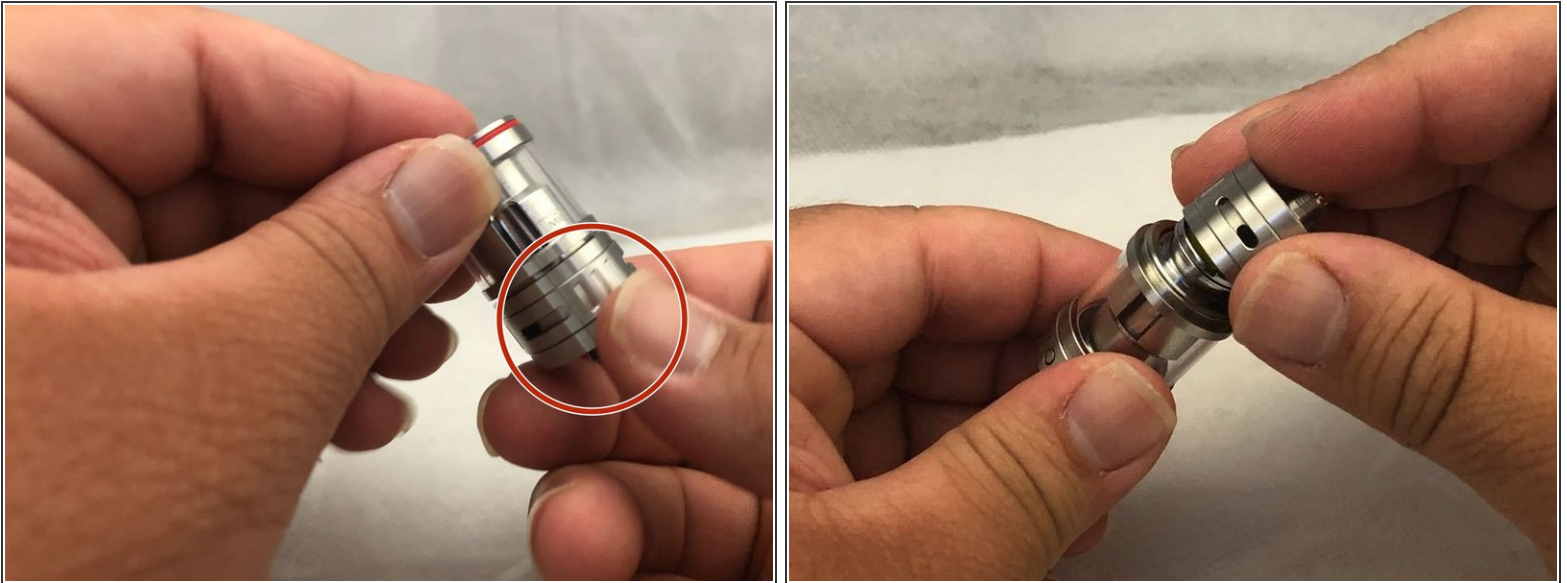

- Remove the bottom lid from the tank. The bottom lid holds the coil inside the tank. By removing the bottom lid, you are able to take out the coil.

Step 4



- Remove the old coil from the tank.
- ⓘ In the third picture, you can see the difference between the new coil on the left and the burnt coil on the right.

Step 5




- This is the tank and both upper and bottom lids after the disassembly process.

Step 6




- To clean the tank and the lids, you need to submerge them in a glass of water for approximately 3-4 minutes to make sure they are cleaned properly.

Step 7

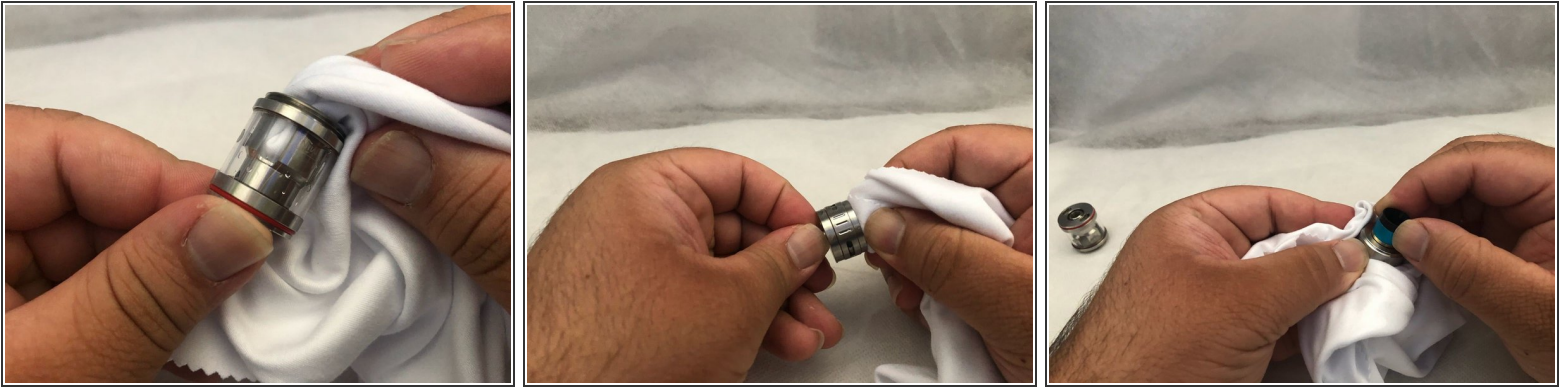

- After the tank and the lids are cleaned, use the towel to dry them as much possible before the next step.

Step 8

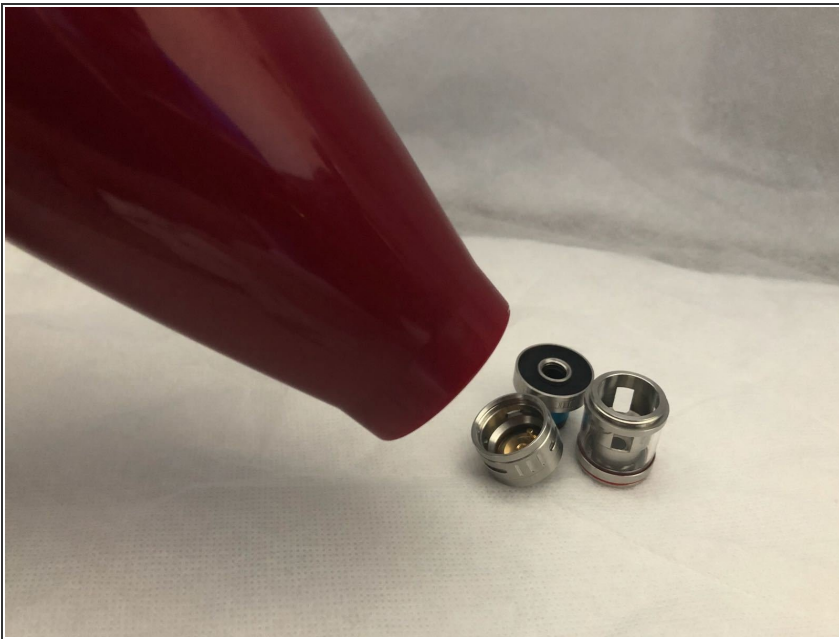

- Use the hair dryer with medium heat to make sure no water drops exist.

⚠ Any water drops might affect the function of the coil which will result into a flavor change.

Step 9



- Place the new coil inside the tank. Make sure the coil is stable and not moving.
- Using the two lids, close the tank from both sides and make sure that the lids are perfectly sealed.

To reassemble your device, follow step 2 in reverse order.