




Dell VRP100 HDMI/USB Cable Replacement

How to replace the HDMI and USB Type A cable in the Dell VRP100 virtual reality headset.

Written By: Marco Salazar

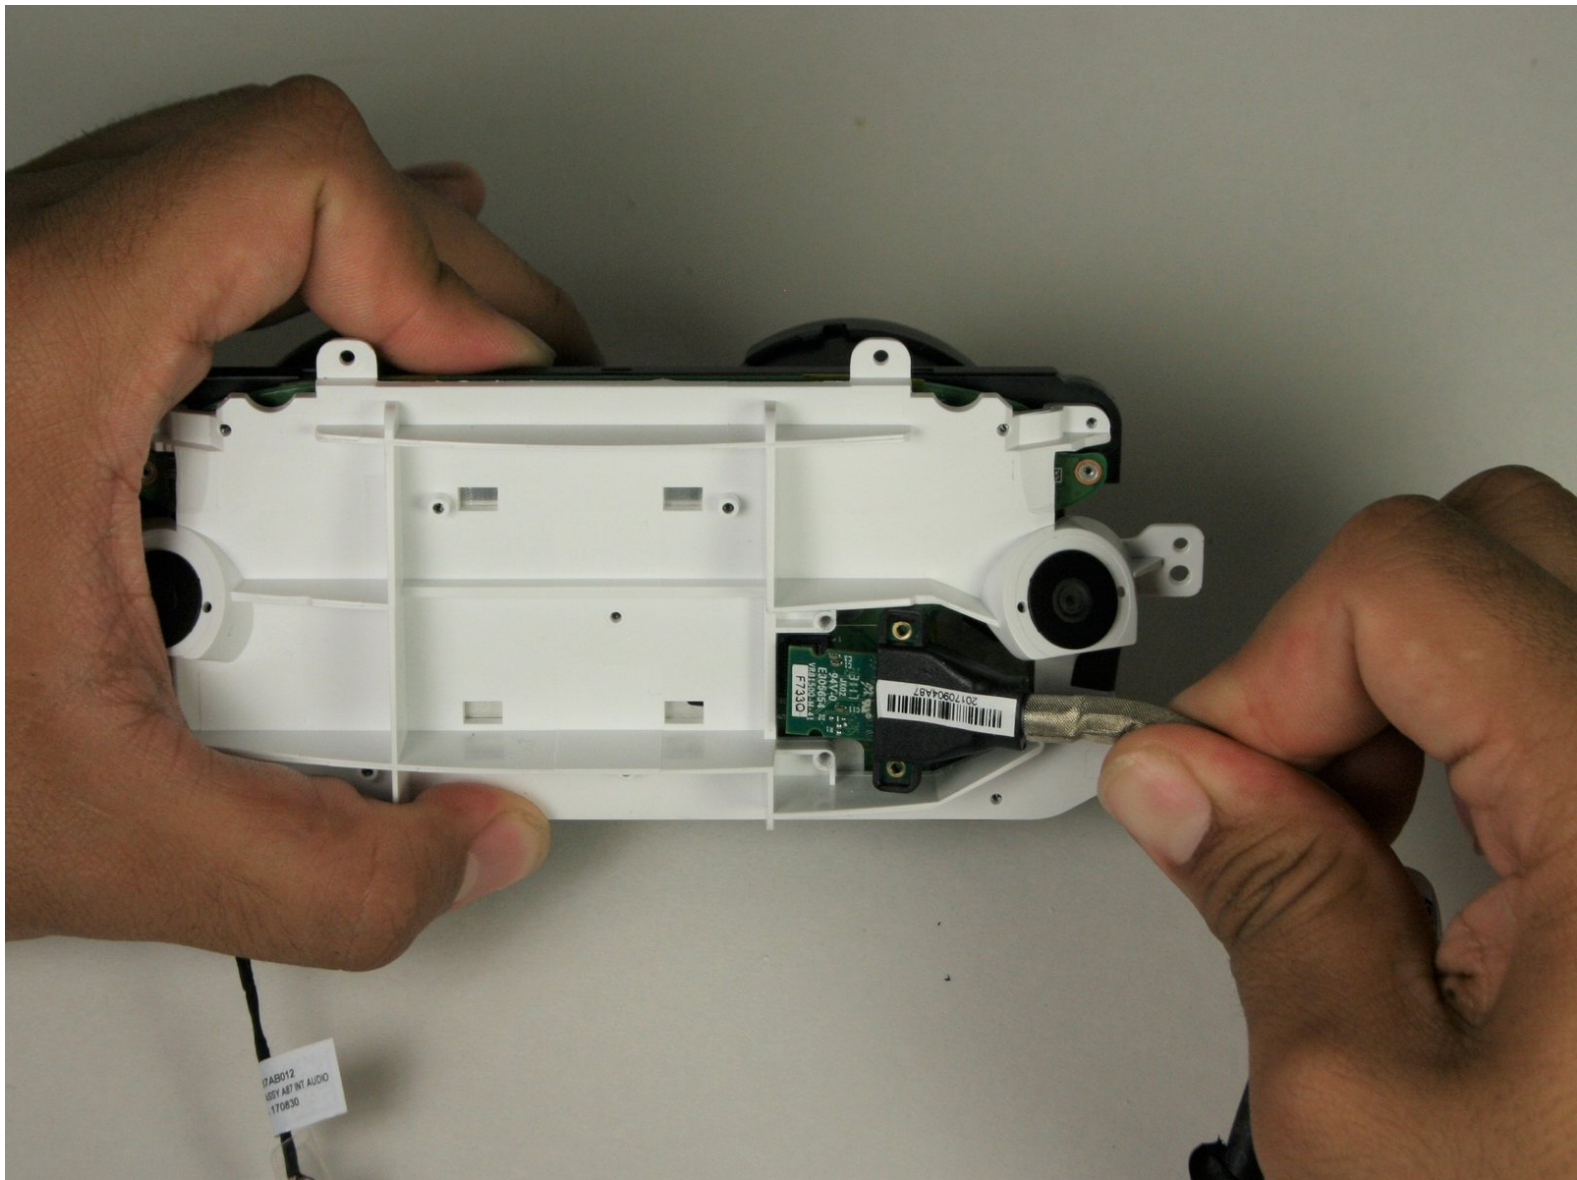

INTRODUCTION

This replacement guide will show you how to replace the HDMI/USB cable on your Dell VRP100 headset. With the right tools, this will be a quick and easy replacement.



TOOLS:

- [Phillips #000 Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
 - [ESD Safe Tweezers Blunt Nose](#) (1)
-

Step 1 — Cover Panel



- Remove the black foam padding by peeling away slowly.
- Remove the front and back padding from the headset by peeling away slowly.

Step 2



- Remove the six 5.5mm PH000 screws from the cover by rotating counter-clockwise.
- ☒ Cover panel may need to be pushed in before inserting screws.

Step 3





- Remove the cover using one of the plastic opening tools, and then carefully pull it from the casing.

Step 4






- Remove the six 5.5mm PH000 screws from the cover by rotating counter-clockwise.
- Carefully remove the lens and motherboard assembly from the white casing.

Step 5 — HDMI/USB Cable

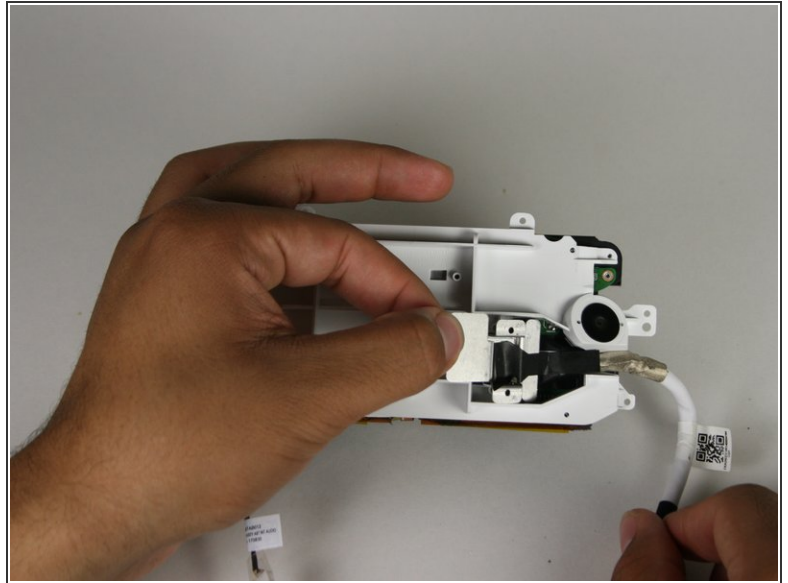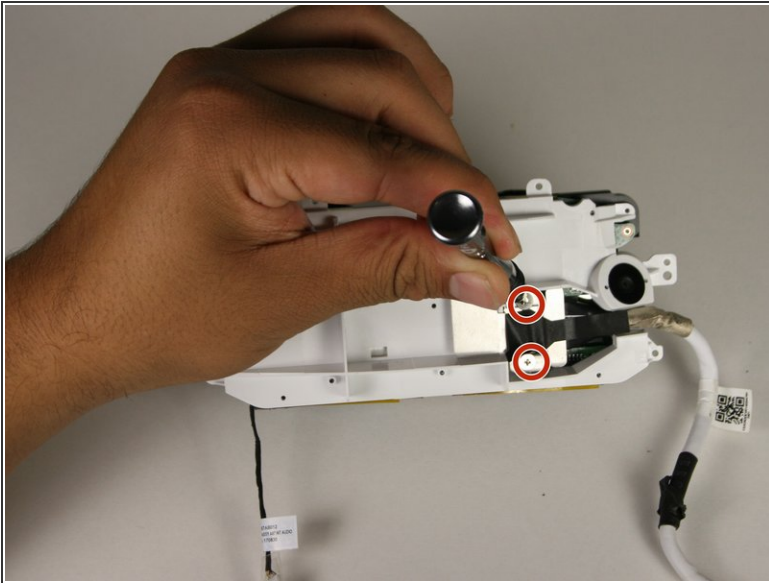

- Remove the two 3.4mm PH000 screws from the cover by rotating counter-clockwise.
- Peel off the tape using your hands or the blunt nose tweezers.

Step 6

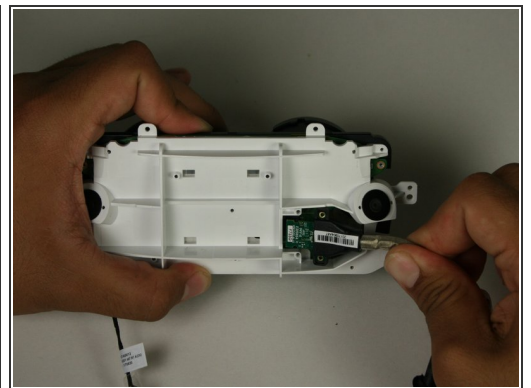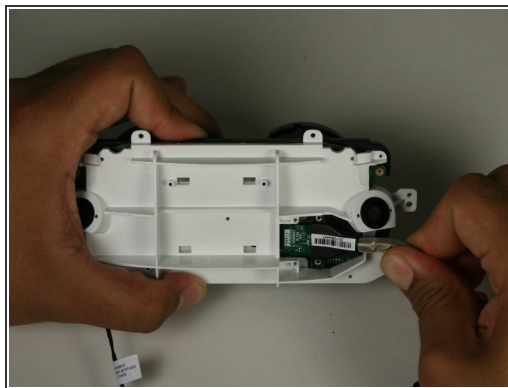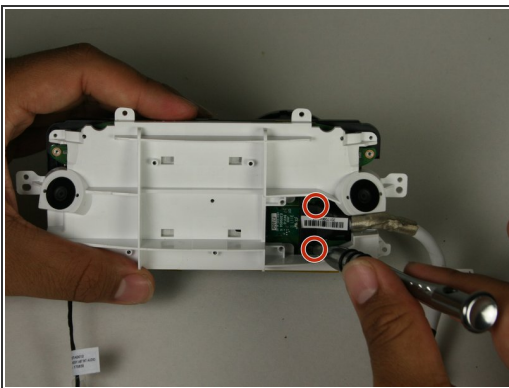

- Remove the two 5.5mm PH000 screws from the cover by rotating counter-clockwise.
- Hold the HDMI/USB cable and remove from the connection.

To reassemble your device, follow these instructions in reverse order.