



# Samsung Galaxy Y Motherboard Replacement

This guide shall show in detail how to replace a motherboard for a Samsung Galaxy Y.

Written By: Peggi Trask



---

## INTRODUCTION

This guide shall detail and illustrate how to replace the motherboard for a Samsung Galaxy Y.

---

### TOOLS:

- [iFixit Opening Tools](#) (1)
  - [Metal Spudger](#) (1)
  - [Phillips #000 Screwdriver](#) (1)
-

## Step 1 — Back Panel



- Use the blue plastic opening tool to pry the back-panel off of the device.

## Step 2 — Motherboard



- Use a Phillips #000 screwdriver to remove the four 5mm screws located in the corner of the interior back panel.
- Remove the SD card as well by sliding the card out of its slot.

### Step 3





- Use the metal pry tool to separate the interior back panel from the interior hardware and screen.

### Step 4



- Disconnect the orange motherboard connection, then remove the interior hardware from the front screen display.

## Step 5

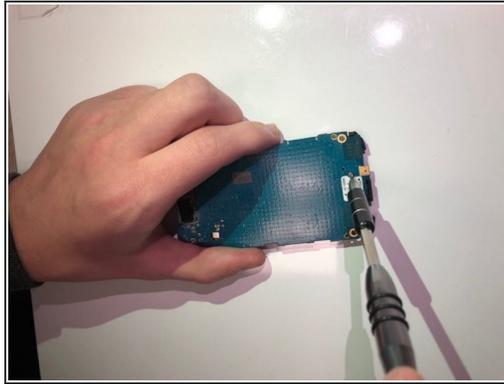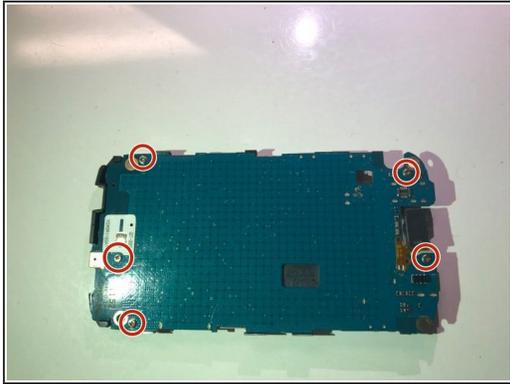

- Use a Phillips #000 screwdriver to remove the five 2mm screws located in the corner of the silver protective panel.
- If the motherboard is cracked or damaged, then replace with a new one.

To reassemble your device, follow these instructions in reverse order.