



Asus F554LA-WS52 Screen Replacement

How to replace a Asus F554LA-WS52 screen.

Written By: Aaron Ratliff



INTRODUCTION

You may need to replace your notebook's screen if it is scratched or cracked, but have an otherwise intact notebook. A simple fix, you will need a plastic opening tool and Phillips #0 screwdriver.

TOOLS:



- [iFixit Opening Tools](#) (1)
 - [Phillips #0 Screwdriver](#) (1)
-

Step 1 — Screen



- Remove the two plastic screw coverings from the bottom of the screen panel.

Step 2

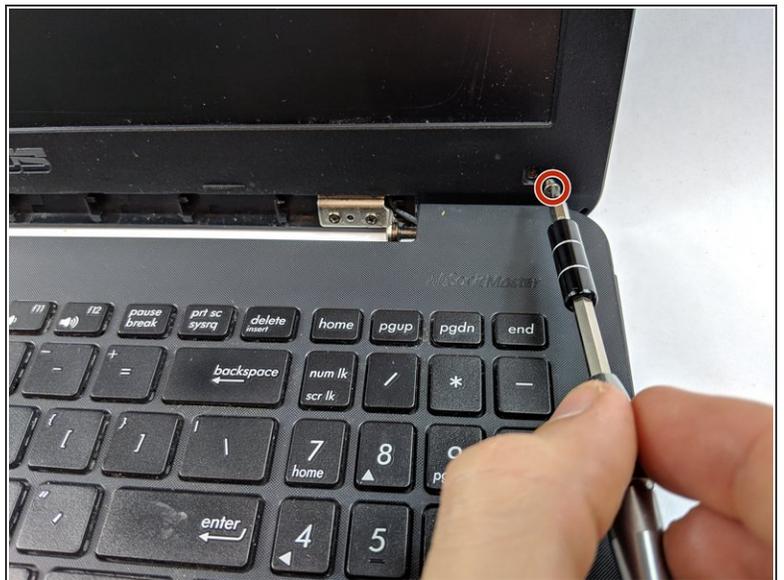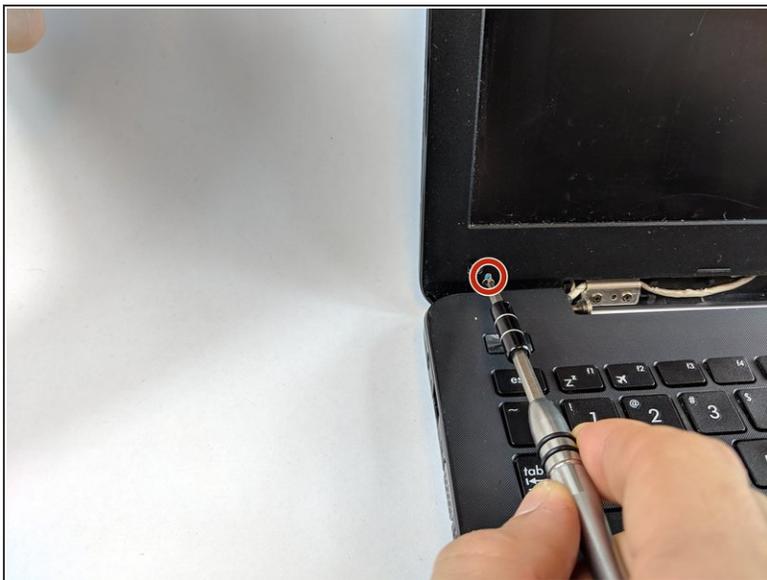



- Remove the two 4.6mm screws using the Phillips #0 screwdriver.

Step 3




- Using the plastic opening tool, gently pry the notebook's plastic screen covering away from the screen.

Step 4

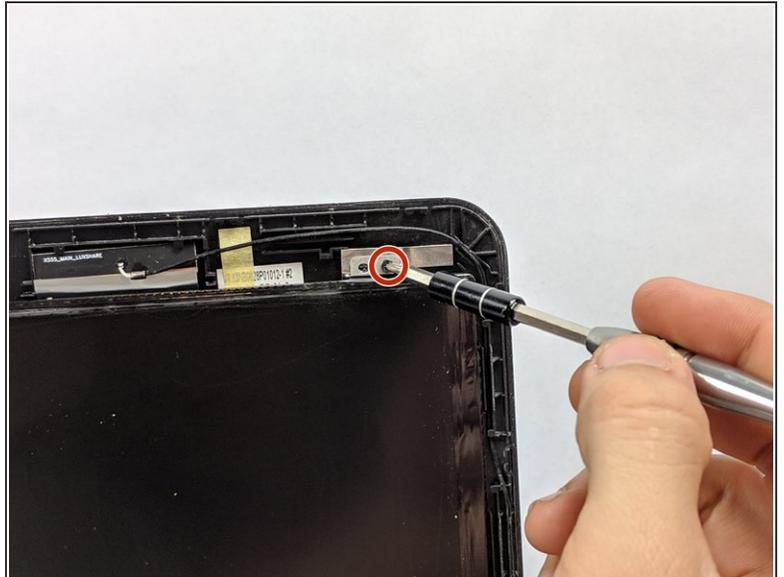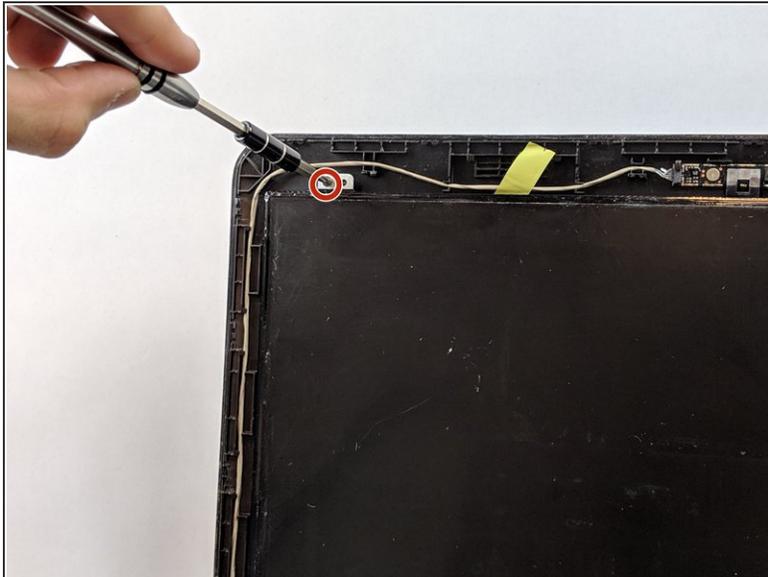

- Remove the two 4.6mm screws holding screen in place.

Step 5

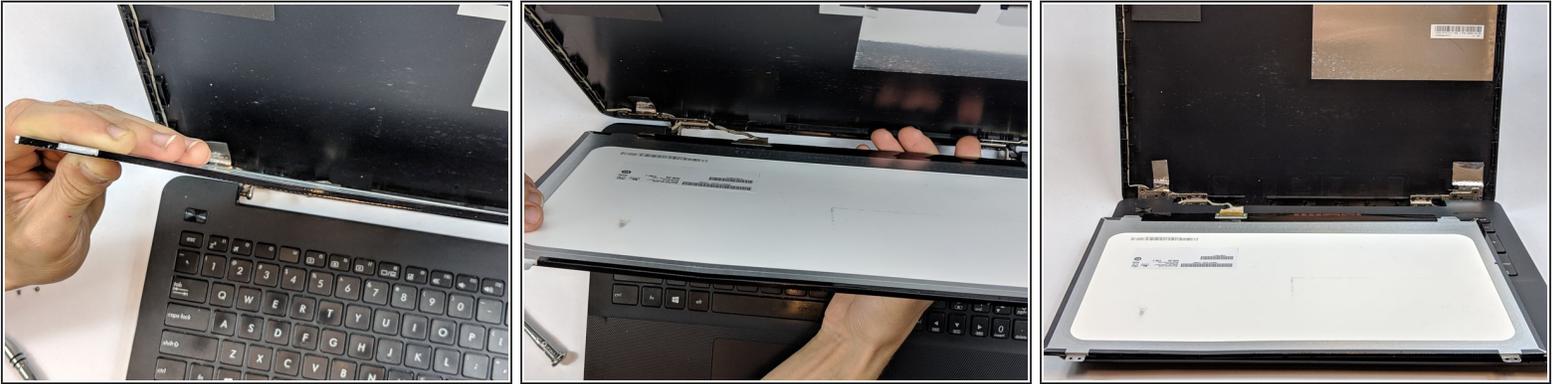

- Carefully, lay screen down on the keyboard.

⚠ Be cautious as the screen will still be attached.

Step 6



- Remove tape that covers the visual pin connectors.
- Gently disconnect the screen from the pin connectors and replace.

To reassemble your device, follow these instructions in reverse order.