




JVC KW-V820BT Passenger Side Panel Removal and Replacement

Removal of the passenger side panel of the device will allow access to other internal components.

Written By: Marshall Andersen

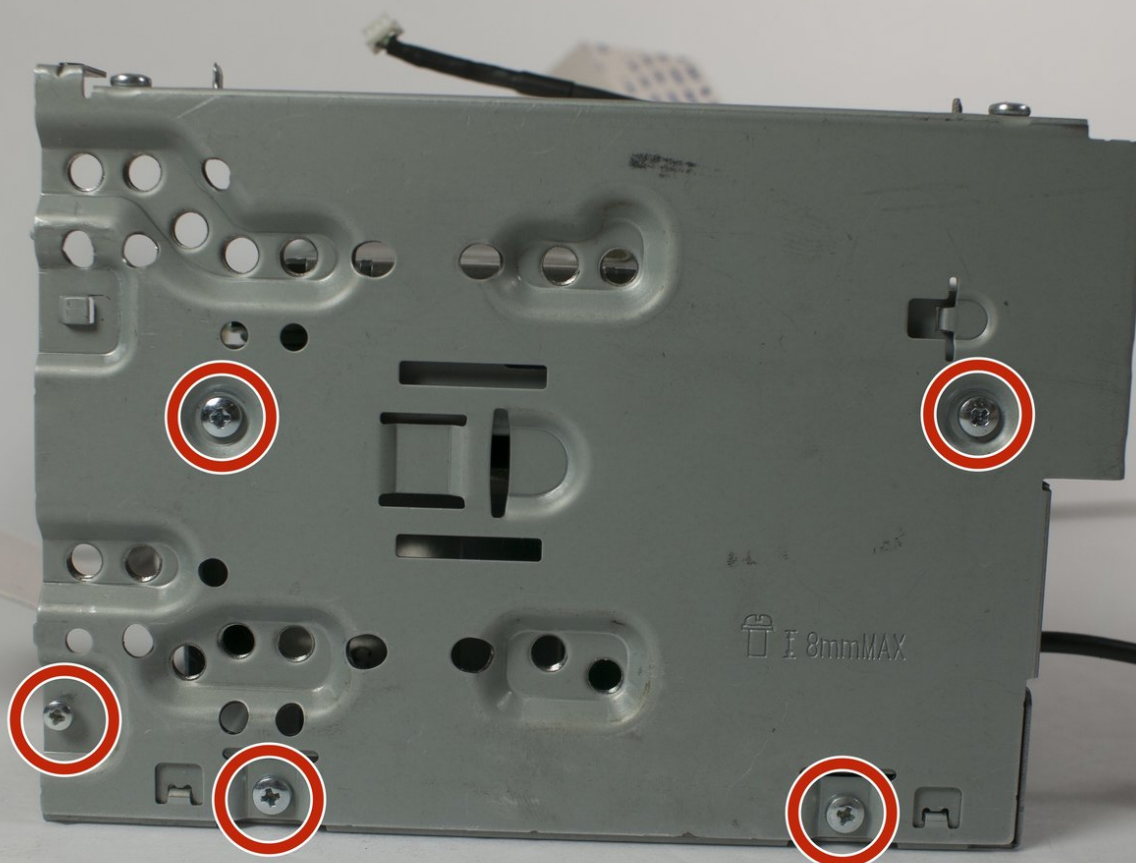


INTRODUCTION

Removal of the passenger side panel of the device will allow access to other internal components.

TOOLS:


- [Phillips #00 Screwdriver](#) (1)
 - [Phillips #0 Screwdriver](#) (1)
 - [Spudger](#) (1)
 - [Metal Spudger](#) (1)
-

Step 1 — Front Panel Assembly

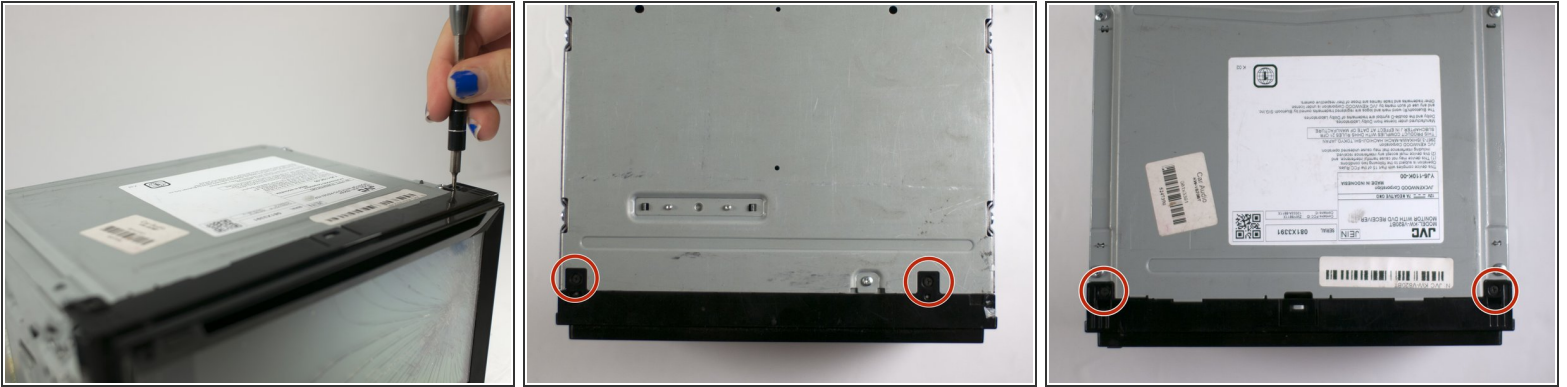

- Remove the four 1/8-inch black machine screws using a Phillips #00 screwdriver.

Step 2

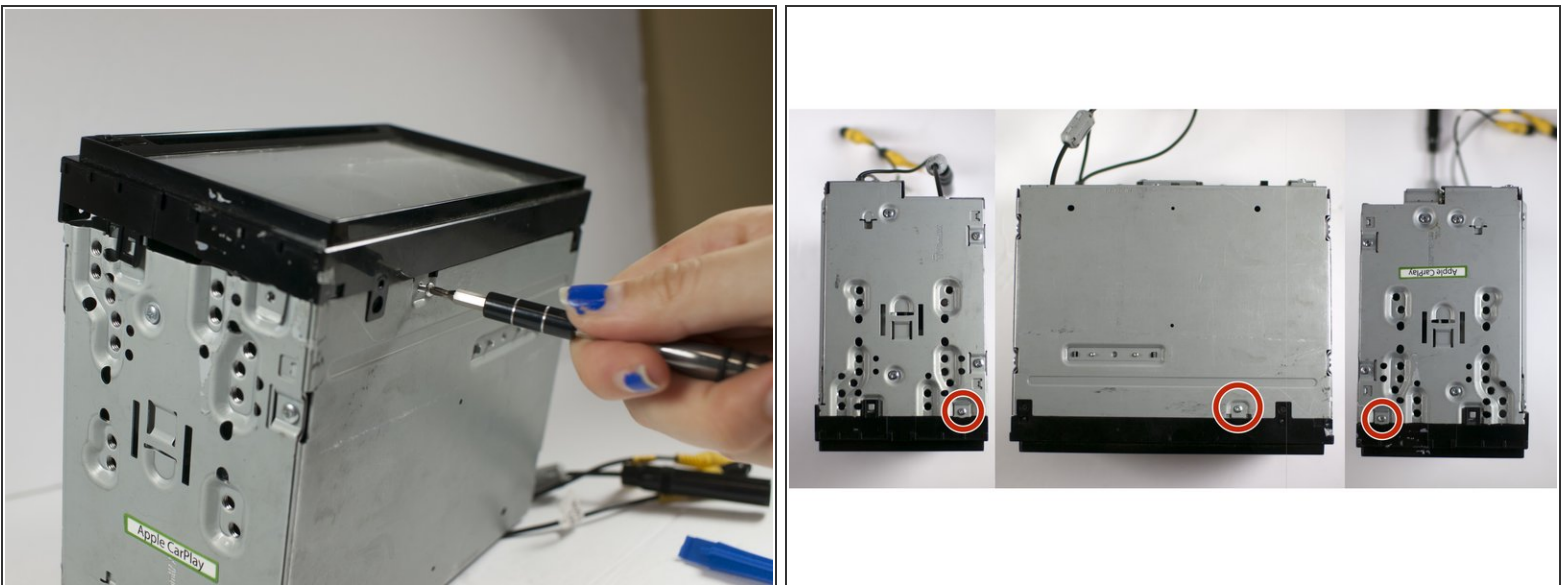


- Remove three steel-finish, pan-head, 1/64 x 3/16" machine screws identified in the photograph, using the Phillips #0 screwdriver.

Step 3




- Using your fingers and/or a metal spudger, gently release the plastic locking tabs of the front panel assembly from the steel enclosure while prying the front panel assembly away from the steel enclosure with your fingers.

Step 4

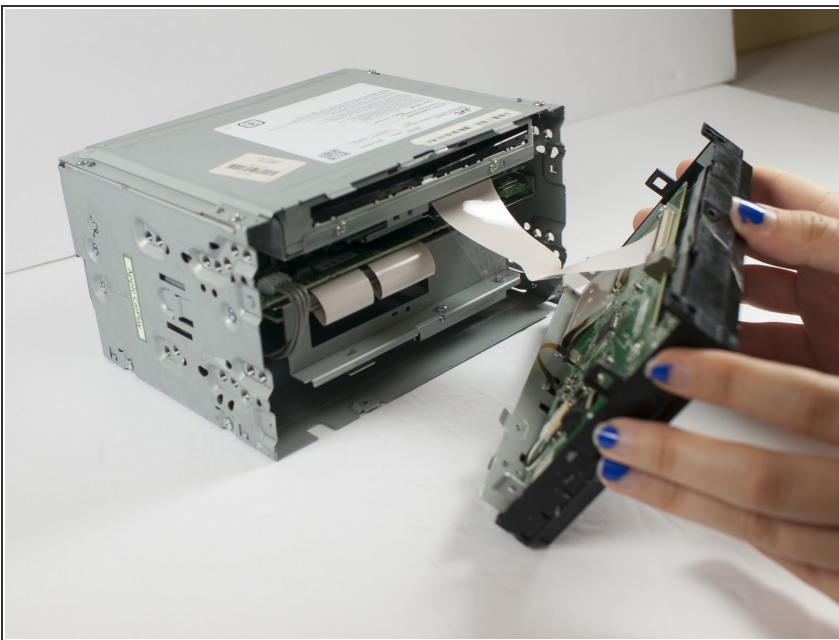


- Gently remove the front panel from the steel enclosure.

Step 5

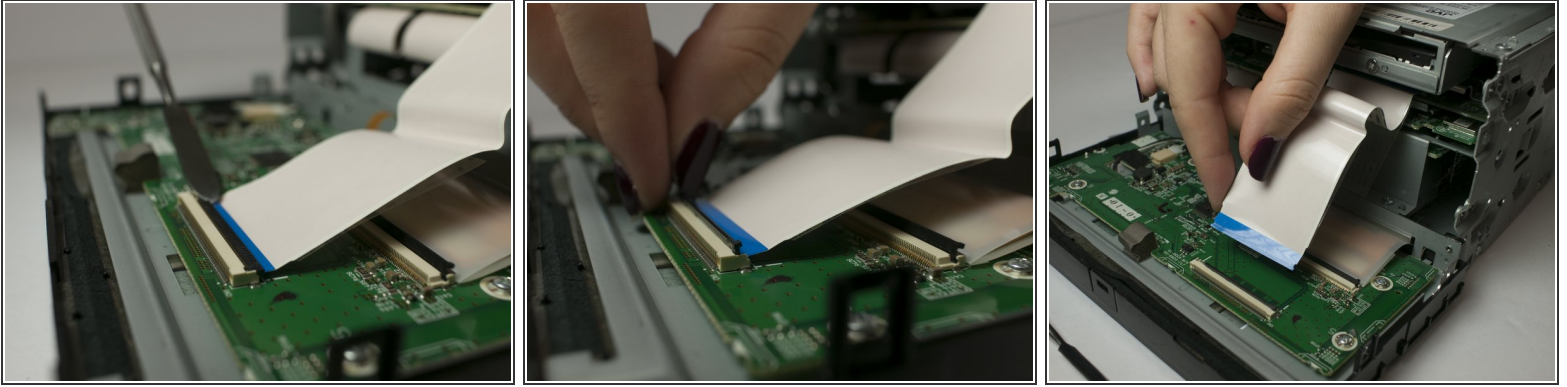

- Gently separate the ribbon cable from from ZIF connector on the circuit board using a metal smudger.




 Be careful not to scratch or damage components or features of the circuit board with the metal spudger

Step 6 — Top Panel Removal



- Remove seven 1/64 x 3/16" screws from the top panel using the Phillips #0 screwdriver.
- Remove the top panel.

Step 7 — Passenger Side Panel Removal and

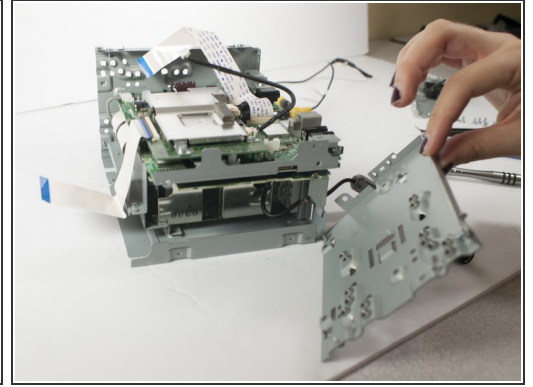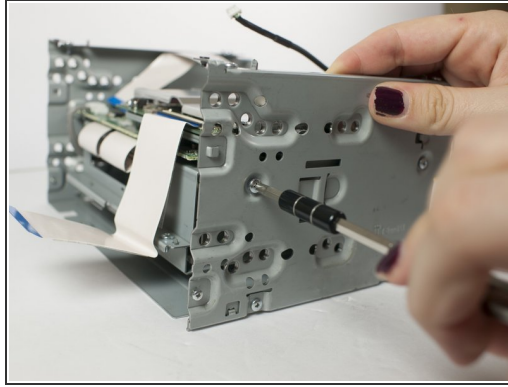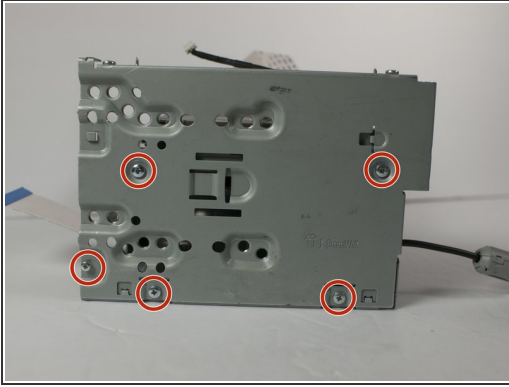

- Remove the five pan-head, 1/64 x 3/16" machine screws using a Phillips #0 screwdriver.

To reassemble your device, follow these instructions in reverse order.