




# HP Pavilion 15-b109wm RAM Replacement

This guide will show you how to replace the memory module (RAM) inside your HP Pavilion 15-b109wm.

Written By: Stephen Gacioch

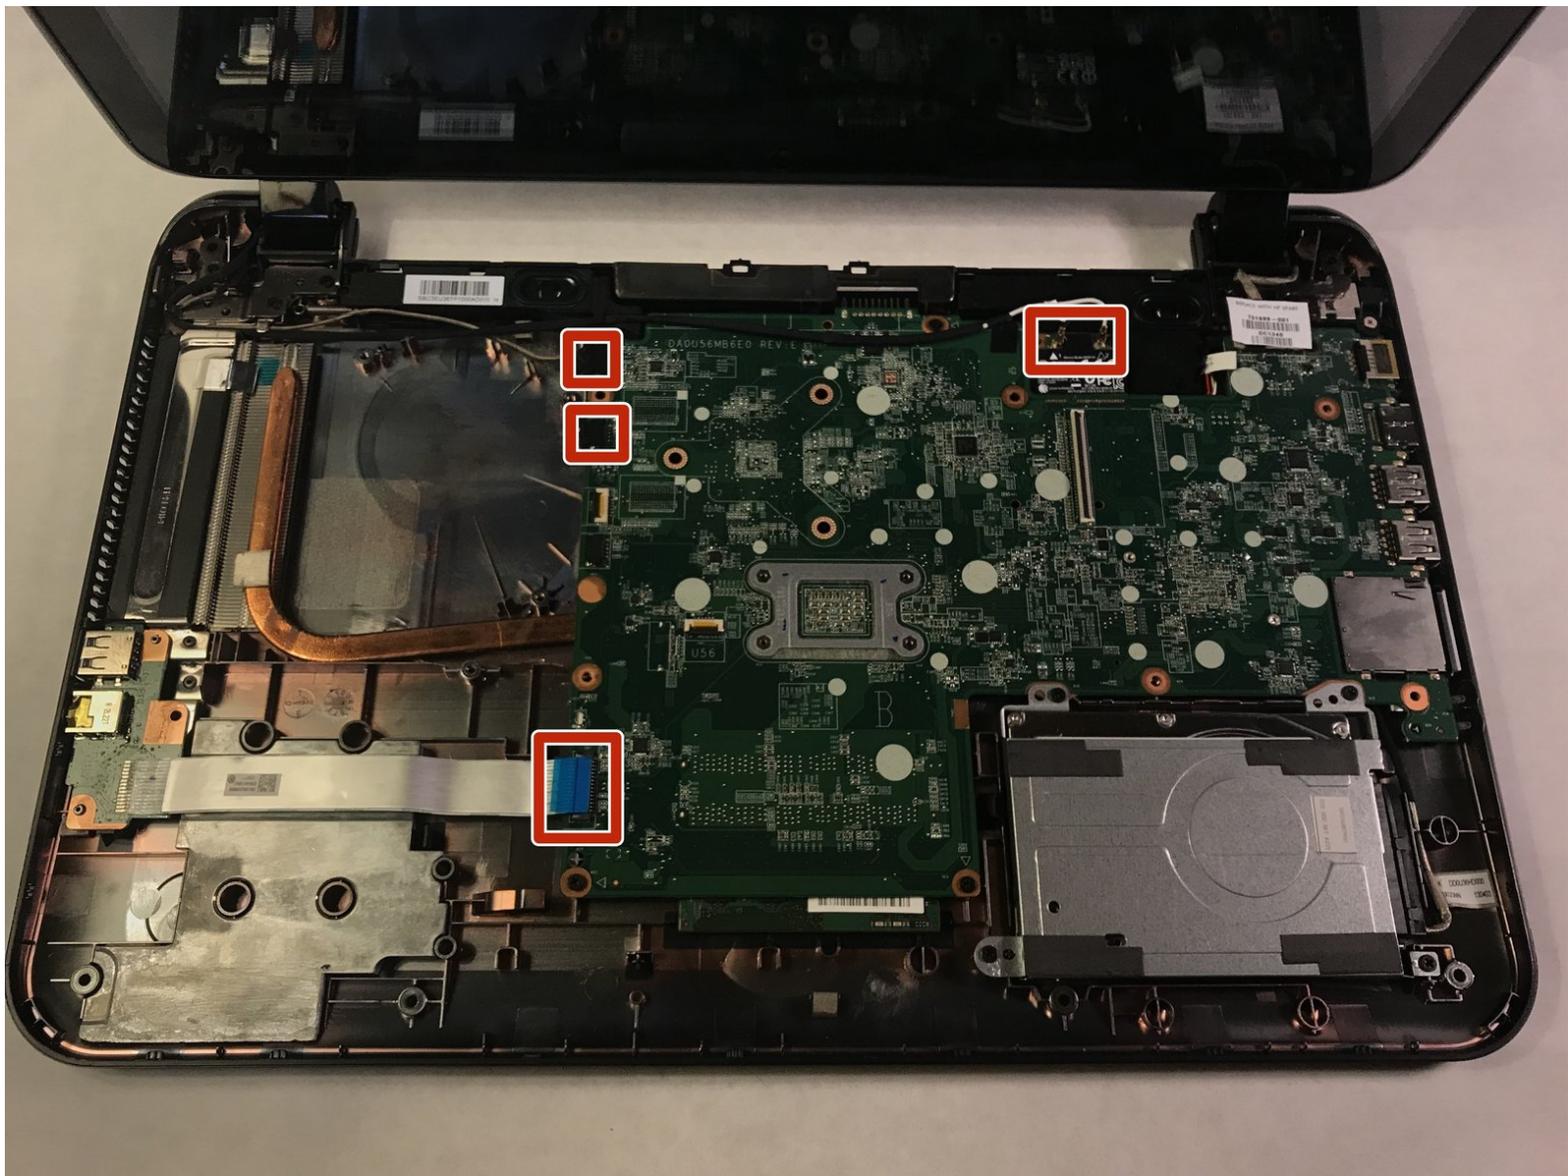

---

## INTRODUCTION

This guide will show you how to replace your Memory Module in your HP Pavilion 15-b109wm. This process will take about 1 hour, and is very tedious. So take your time, complete each task carefully, and you'll have a successful replacement of your Memory Module.

---

### TOOLS:

- [JIS #1](#) (1)
  - [Heavy-Duty Spudger](#) (1)
  - [iFixit Opening Tools](#) (1)
-

## Step 1 — Battery



- Power off the device and disconnect from any power source.

## Step 2



- Turn the device upside down and ensure the back of the device is facing you.

### Step 3




- Push both buttons towards one another simultaneously. The battery slightly pops out.

### Step 4



- ⚠ Pull out the battery from the device's battery slot.

## Step 5 — Keyboard

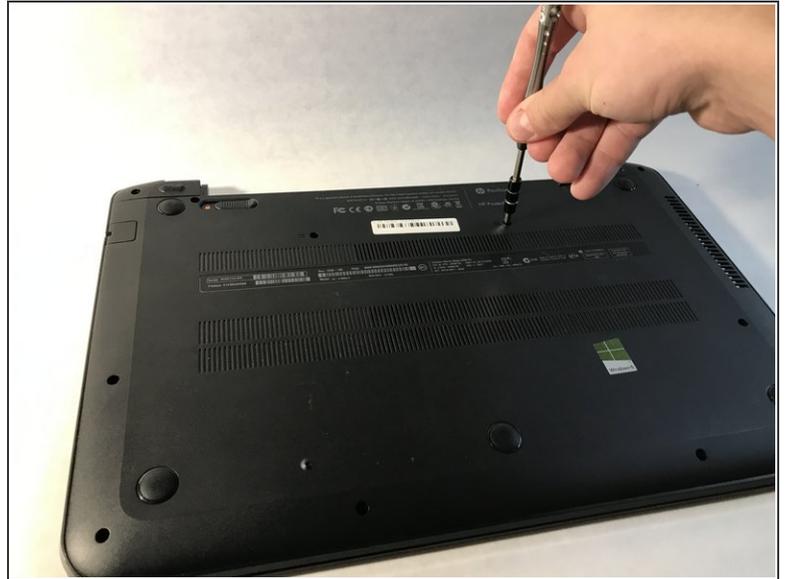

- Use JIS #1 screwdriver to remove the eleven 6 mm screws.

## Step 6





- Locate the two screw holes that allow access to removing the keyboard.
- ⓘ There is a keyboard sign beside both keyboard access holes.

## Step 7




- Turn the device onto its side.
- Using a heavy duty spudger, gently disengage the keyboard.

## Step 8

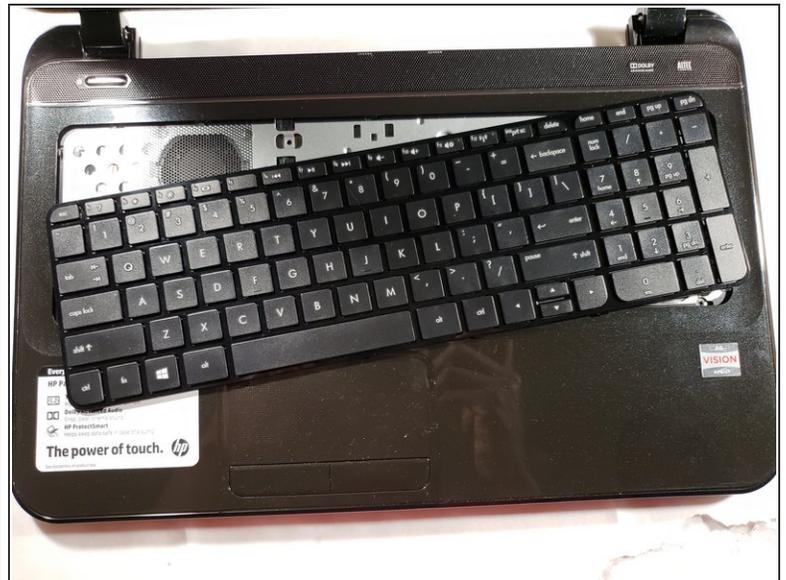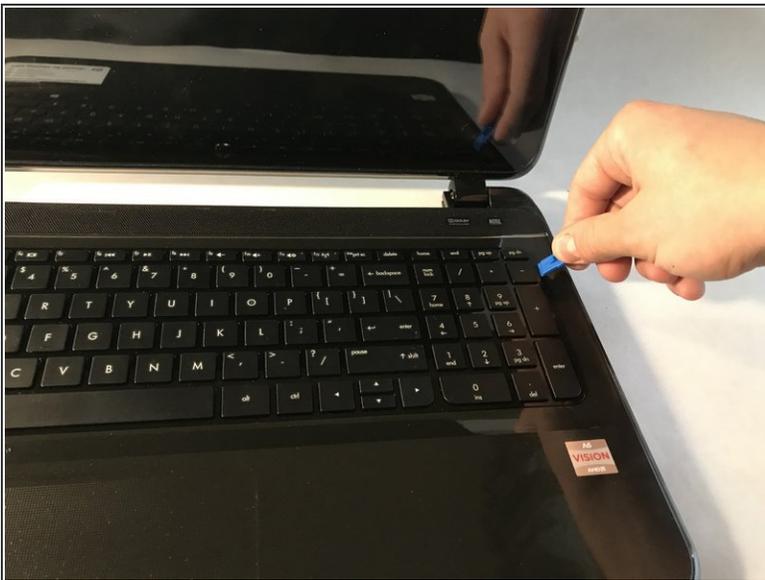


- Using a plastic opening tool, release the keyboard clips.

## Step 9

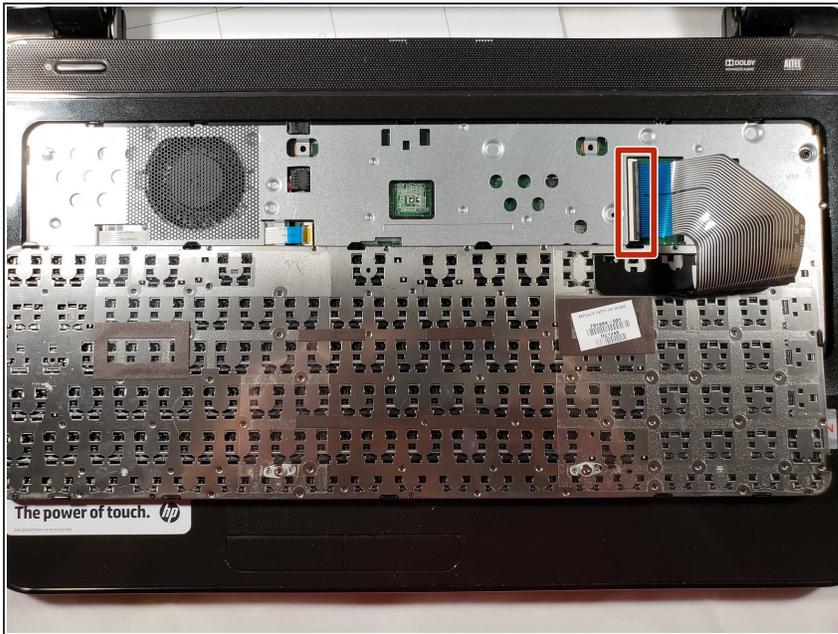

- Tilt the keyboard to expose the *Zero Insertion Force* connector to which the keyboard cable is attached.


## Step 10

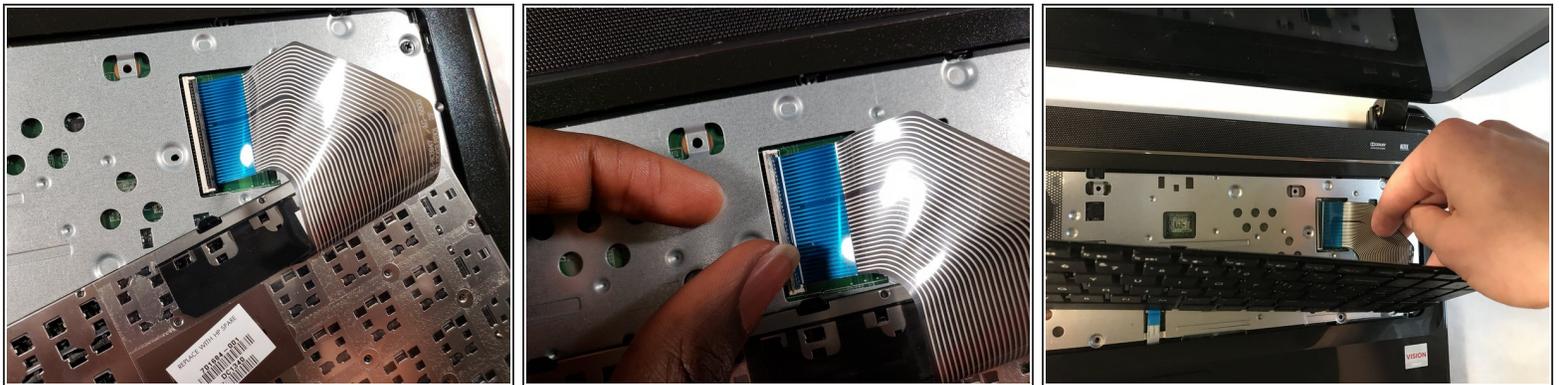

- Disconnect the keyboard cable from the motherboard by detaching the *Zero Insertion Force* connector.

**i** To detach the connector, release by lifting the black plastic tab up.

## Step 11 — Fan

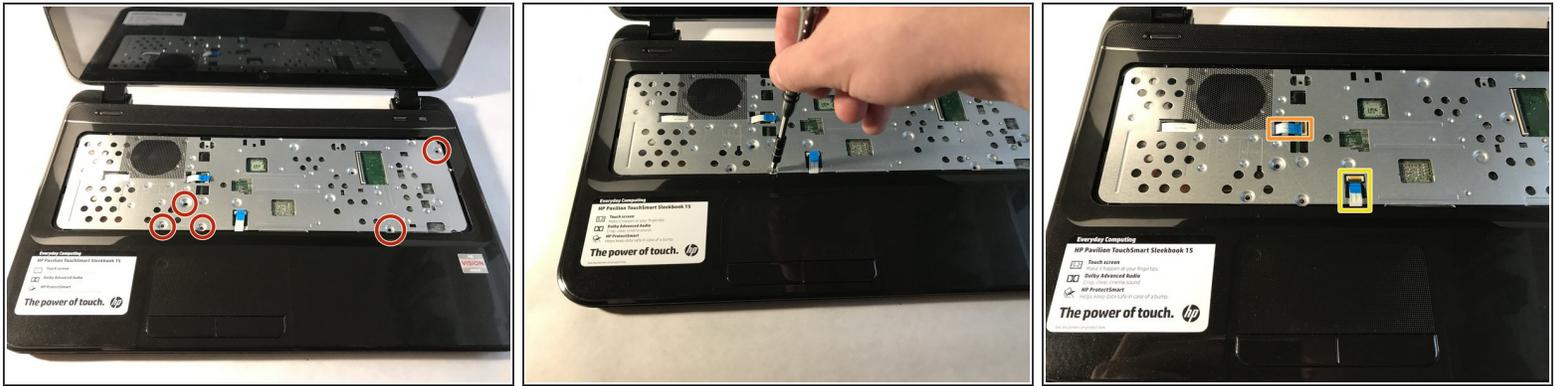

- Using a JIS #1 screwdriver, remove the five 5mm screws.
- Detach the power button cable.
- Detach the touch pad cable.

## Step 12





- Using a plastic opening tool, pry open the top cover.
  - Unscrew the two 5 mm screws using a JIS #1 screwdriver.
  - Gently, pull to detach the fan cable.
- ⚠ Be careful so you do not damage the motherboard.

## Step 13





- Carefully remove the fan from its slot.

## Step 14 — RAM

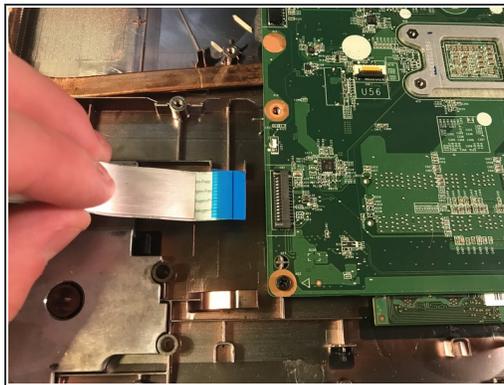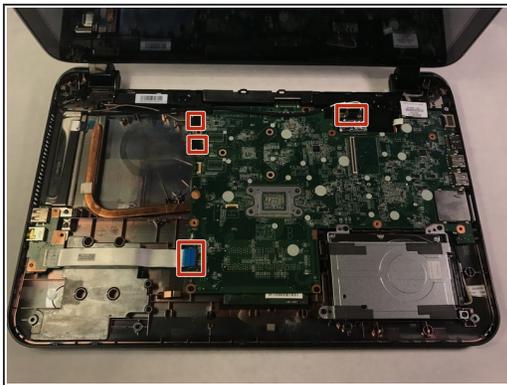

- Disconnect the cables to the motherboard.

## Step 15

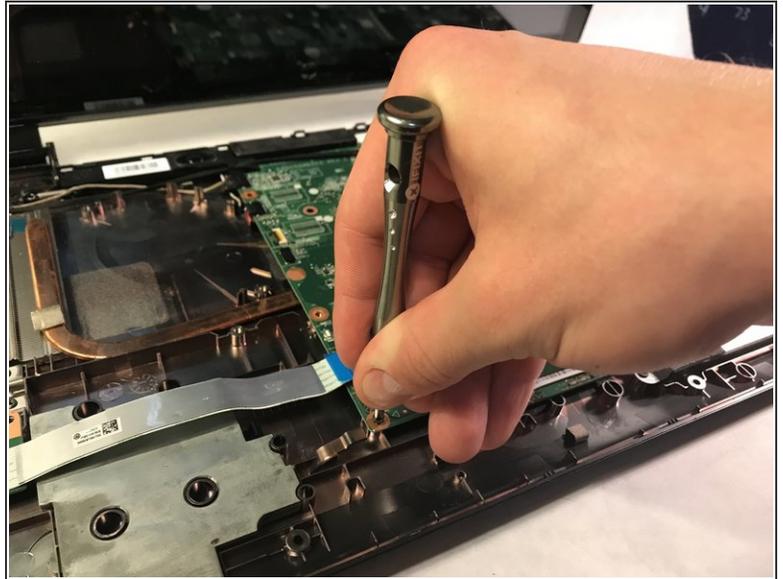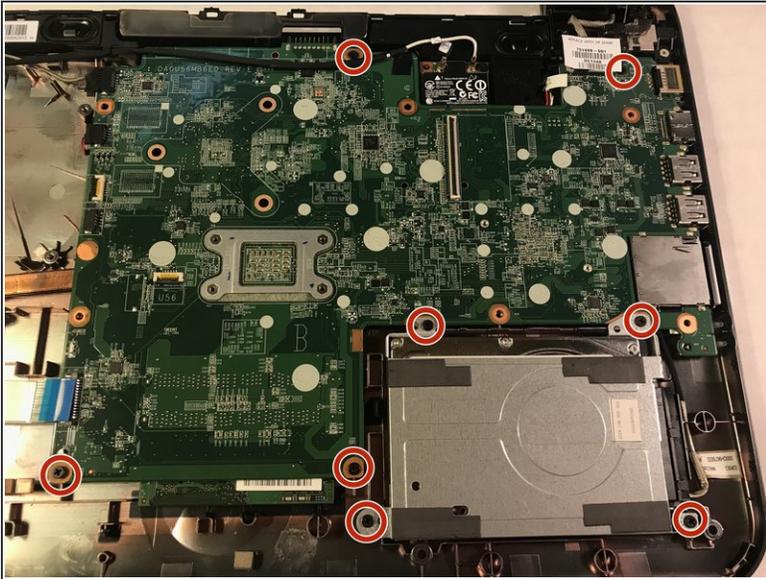

- Remove the eight 5 mm screws with the JIS #1 screwdriver.

## Step 16




- Remove the hard drive.

## Step 17




- Unclip the WLAN cable out of its place to allow the motherboard room to move.

## Step 18

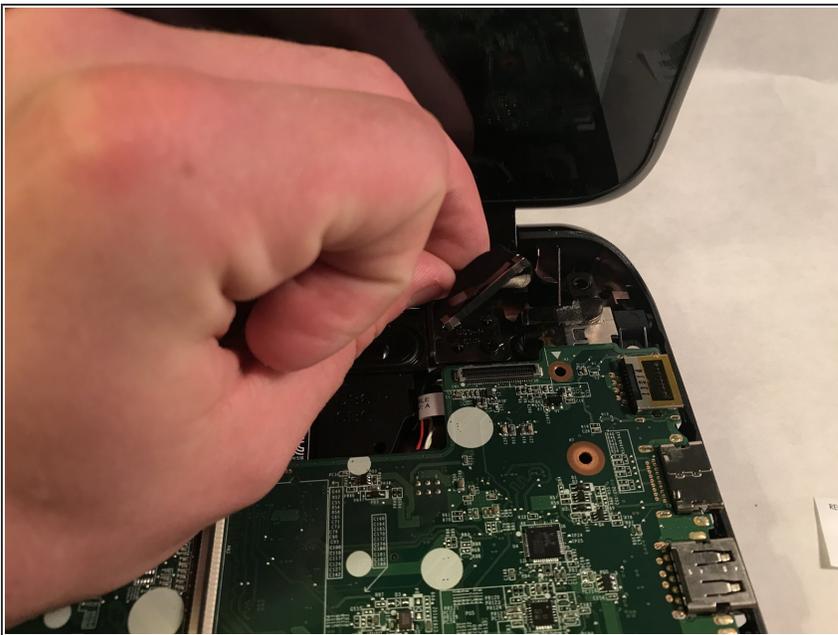


- Detach the power connector cable.

## Step 19

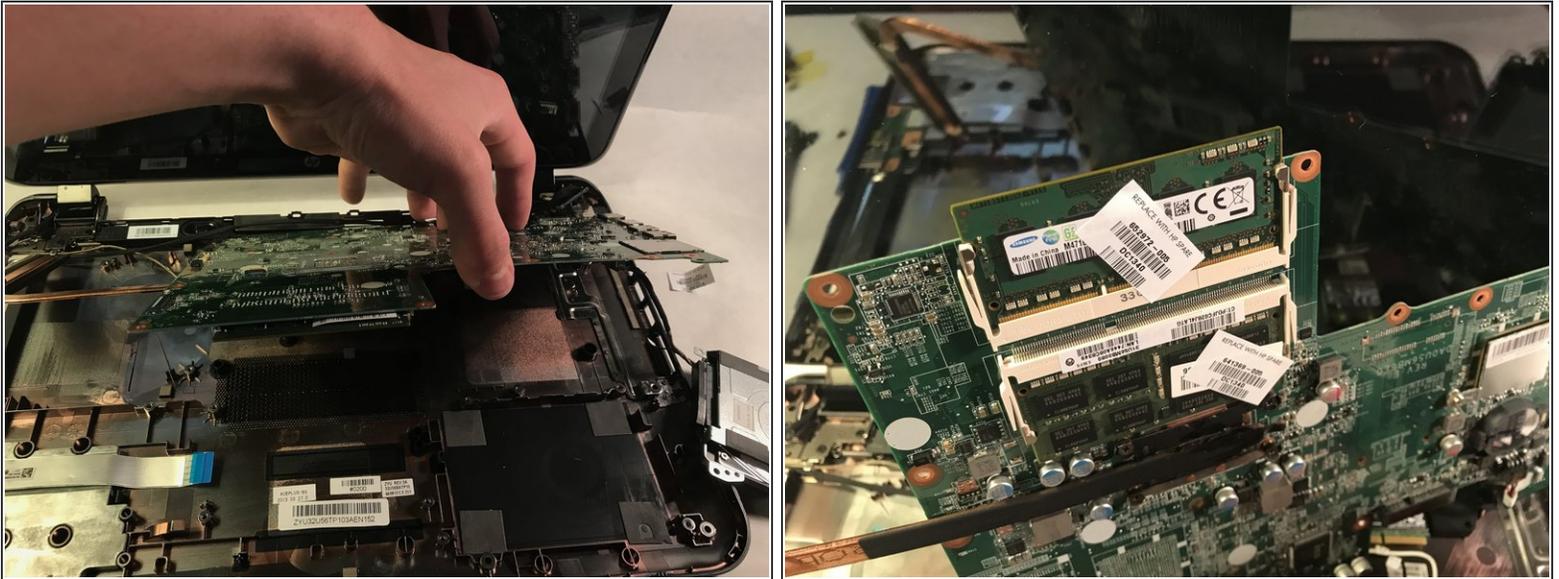

- Lift up the motherboard from the bottom side of the device.

## Step 20

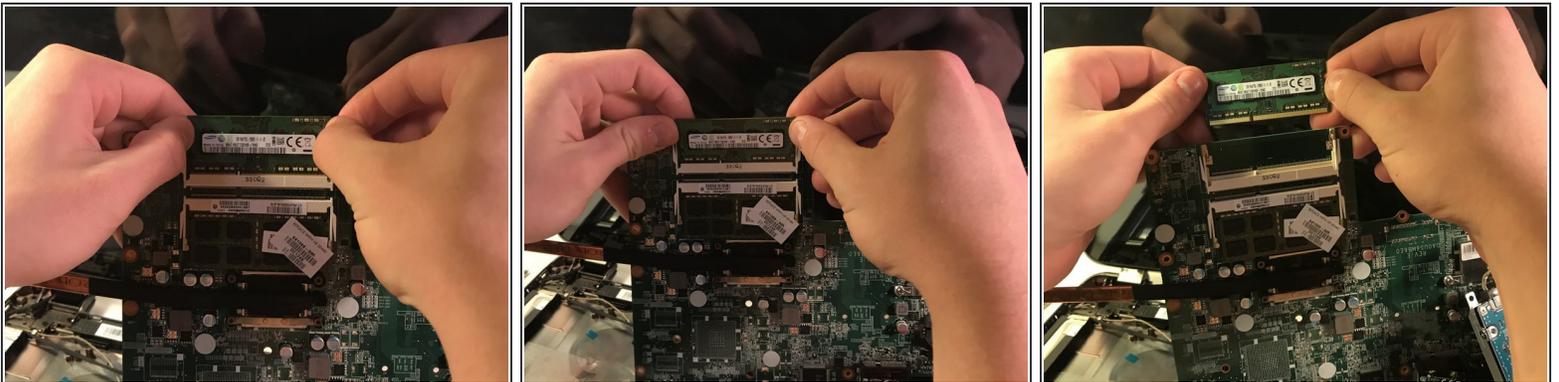

- Using your thumbs, push out on the bracket.
- When the memory module feels loose, pull up on the module.

To reassemble your device, follow these instructions in reverse order.