

Samsung Galaxy S10 Top Midframe Removal

Prerequisite guide only. Removes the top midframe for the Galaxy S10.

Written By: Arthur Shi



INTRODUCTION


Prerequisite guide only! Removes the top midframe, which includes the charging coil and NFC antenna, for the Samsung Galaxy S10.

TOOLS:

۶

- Phillips #00 Screwdriver (1)
- iFixit Opening Picks set of 6 (1)
- Spudger (1)

Step 1 — Remove the midframe

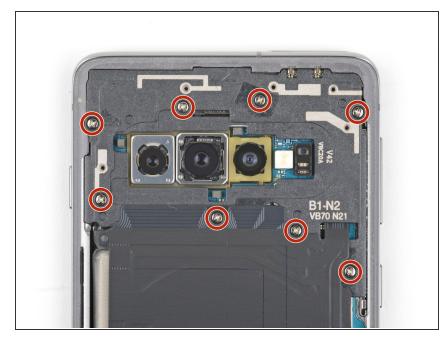


 Remove the eight 4 mm Phillips screws securing the top midframe to the phone.

Step 2



- The midframe is still held in place by a few plastic clips around the edge.
- Insert the point of a spudger into the notch on the right edge of the midframe, near the volume up button.
- Pry up to loosen the midframe from the phone.

Step 3

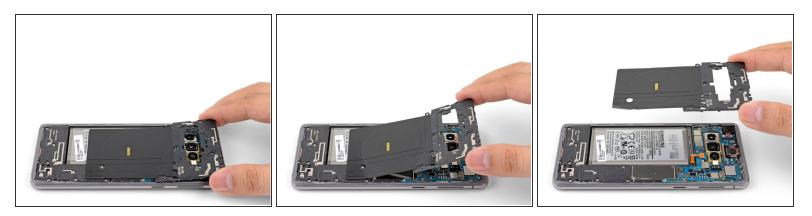

- Lift the midframe from the top corners and remove it from the phone.
 - (i) The top midframe may stick to the lower midframe at its bottom right corner. If that happens, slowly peel it off.
- To reinstall the top midframe:
 - <u>Align the midframe's top edge to the phone</u> and lay the frame down on the phone.
 - <u>Use fingers to apply pressure along the midframe perimeter</u> to snap the midframe clips back into place. The edges should sit flush against the phone edge.

To reassemble your device, follow these instructions in reverse order.