




HP Pavilion 14-bk061st Back Panel Replacement

How to replace an HP Pavilion 14-bk061st back panel.

Written By: Mehrab Daemi

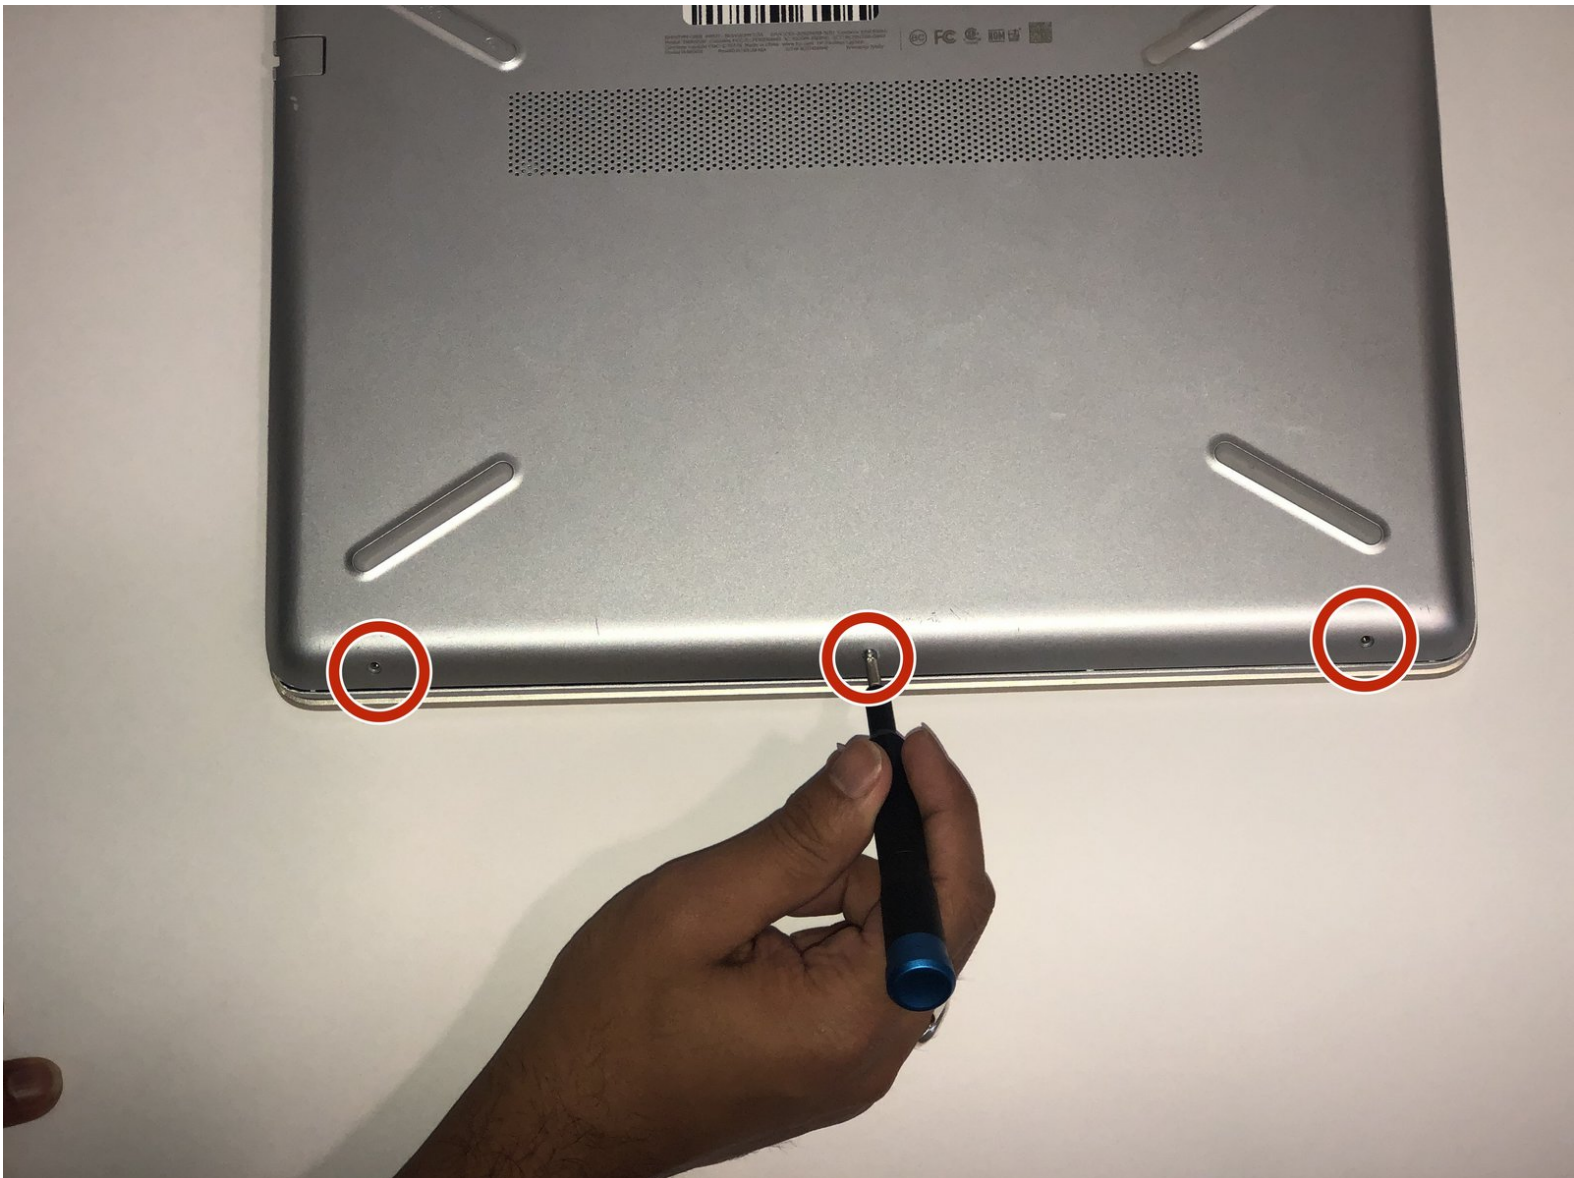

INTRODUCTION

This is the guide to removing the back panel to the HP Pavilion 14-bk061st.



The back cover's purpose is to close up the device and stop debris from entering and possibly damaging the critical components of the device. If the back cover is broken, be very careful when moving the device as debris may easily enter and damage the laptop's components, leading to a costly repair.



TOOLS:


- [iFixit Opening Tools](#) (1)
 - [JIS #1](#) (1)
-

Step 1 — Back Panel

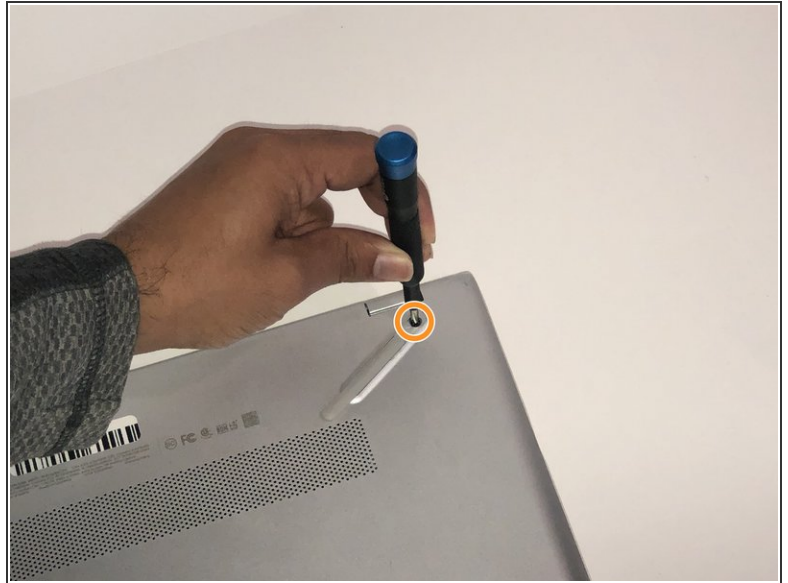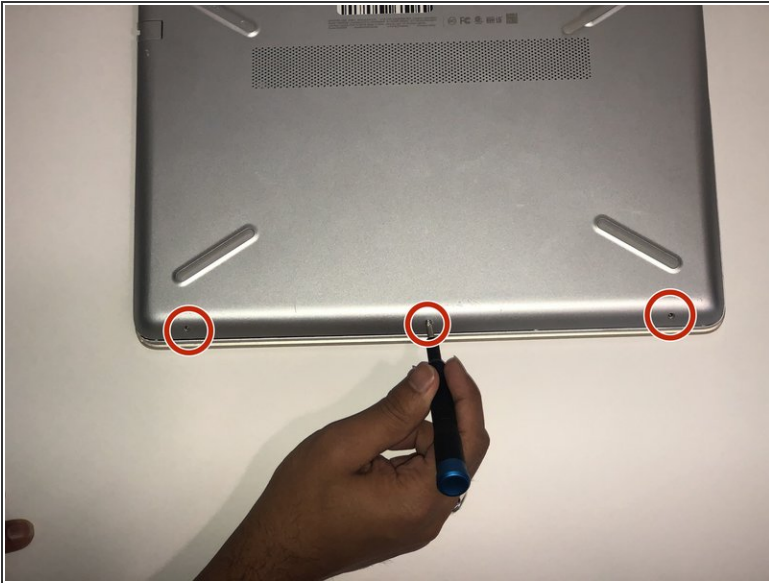

- Remove the three 5.7 JIS #1 screws from the bottom of the laptop.
- Remove the two 6.7mm JIS #1 screws from underneath the feet of the laptop close to the exhaust vent.

Step 2

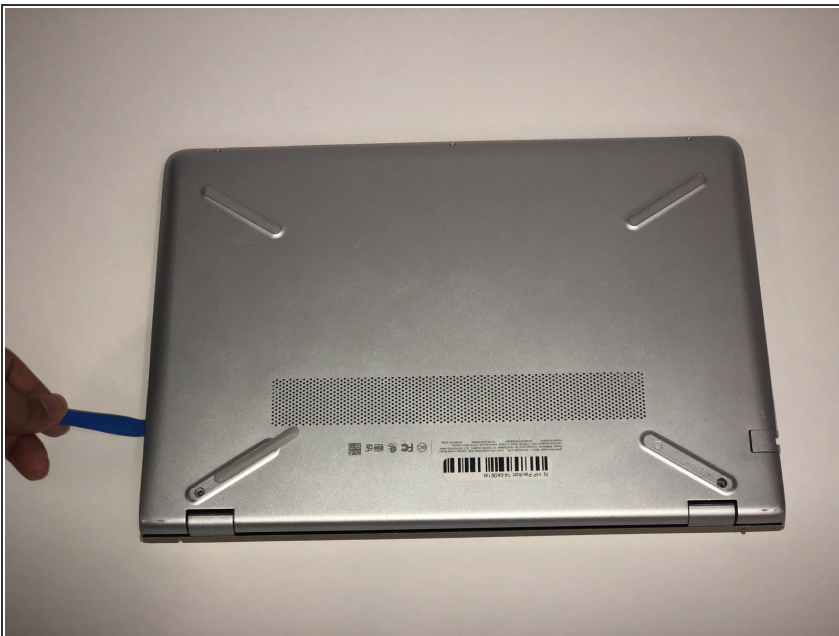

- Unclip the back plate using a plastic opening tool.

Step 3



- Carefully remove the back plate from the laptop.

To reassemble your device, follow these instructions in reverse order.