

Archived

iPhone 5c Screen Replacement

This guide gives instructions on how to replace...

Written By: ncstate8910



INTRODUCTION

This guide gives instructions on how to replace the screen on an iPhone 5c.



64 Bit Driver Kit (1) Heavy-Duty Suction Cups (Pair) (1) iFixit Opening Picks (Set of 6) (1)



iPhone 5c Screen (1)

Step 1 — Taking out bottom screws




 Take out the pentolope screws from the bottom of the iPhone next to the speakers.

Step 2 — Pulling up screen



- Get suction cup and pull up.
- i Note: Use a guitar pick and pry up to lift screen easily.

Step 3 — Unplugging battery

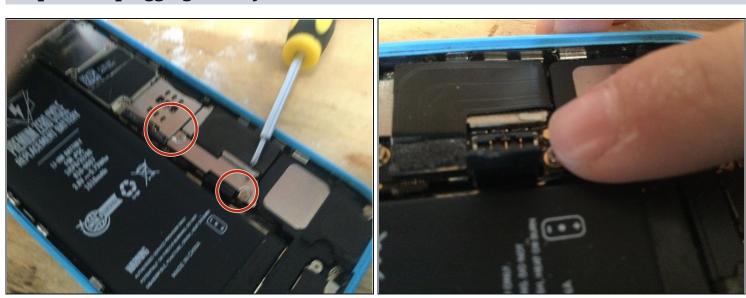

Unplug battery take out Phillips head screws on the cover and unplug the battery.

Step 4 — Removing shield and cables







• Take off screen cables by removing the shield with four Phillips head screws

Step 5 — Remove front facing camera and microphone



- Remove camera and micro bracket with its two Phillips head screws.
- i Note: small sticker needs to be pulled up from front facing camera.


Step 6 — Removing screen back plate



 Remove back plate with six Phillips head screws.

Step 7 — Removing home button



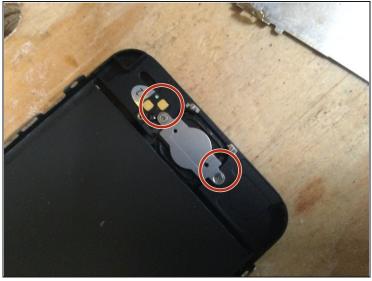

 Remove home button bracket and take out the home button. (You may need to use a guitar pick to loosen home button adhesive).

To reassemble your device, follow these instructions in reverse order.