



MacBook Air 13" Mid 2013 Battery Replacement

Internal Prerequisite. Removing the battery after the fan is gone.

Written By: Walter Galan




INTRODUCTION

Internal Prerequisite. Removing the battery after the fan is gone.

TOOLS:

- [T5 Torx Screwdriver](#) (1)
-

Step 1 — Battery

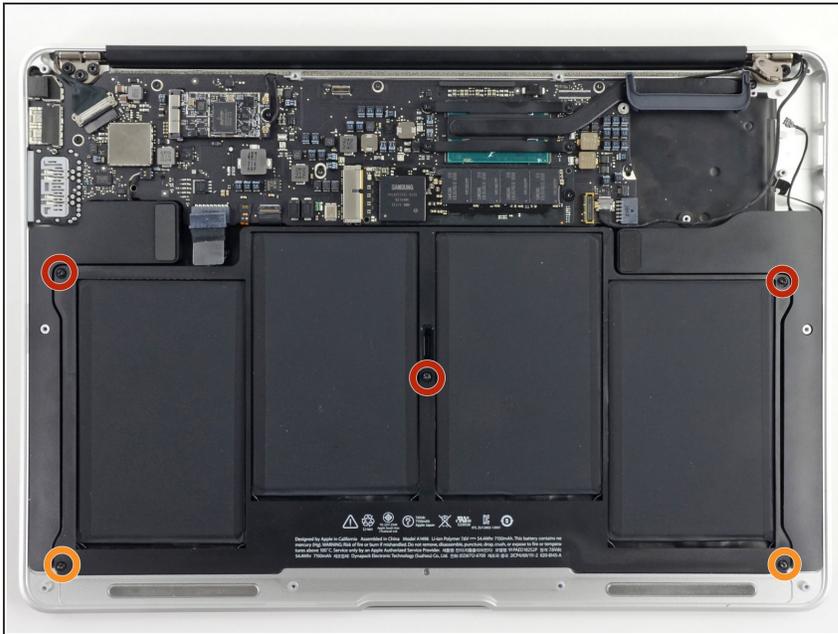

- Remove the following five screws securing the battery to the upper case:
 - Three 6.3 mm T5 Torx screws
 - Two 2.4 mm T5 Torx screws

Step 2



- ⚠ When handling the battery, avoid squeezing or touching the four exposed lithium polymer cells.
- Lift the battery from its edge nearest the logic board and remove it from the upper case.

To reassemble your device, follow these instructions in reverse order.