



# Samsung Blast Motherboard Replacement

This guide will demonstrate how to replace the motherboard of a Samsung Blast.

Written By: Paige Weinstein



## INTRODUCTION

Use this guide to replace the motherboard of a Samsung Blast. This guide will take you through the process of how to successfully remove and replace the motherboard. A motherboard may need replacement if the device stops working.



### TOOLS:

- [Phillips #00 Screwdriver](#) (1)
  - [Tweezers](#) (1)
  - [iFixit Opening Tools](#) (1)
-

## Step 1 — Motherboard



- Remove the battery cover by pushing it upwards.

## Step 2



- Take out the battery.

## Step 3



- With a Phillips #00 screwdriver, remove the six screws that secure the back of the case.

ⓘ You will not be able to completely remove the top two screws. Simply loosen them enough that you can still remove the cover.


## Step 4



- Pull off the back cover of the phone.




## Step 5

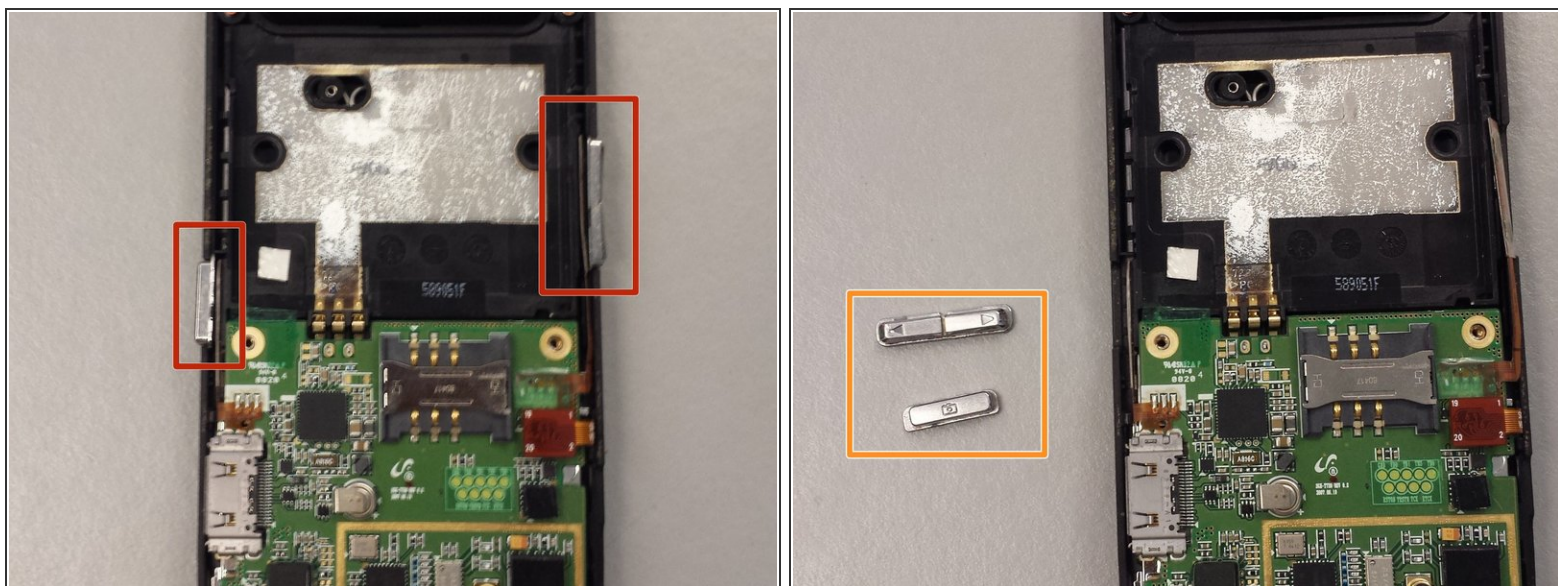

- Remove the volume and camera buttons by pulling them out.



☑ Put the buttons aside until it is time to reassemble the phone.

## Step 6

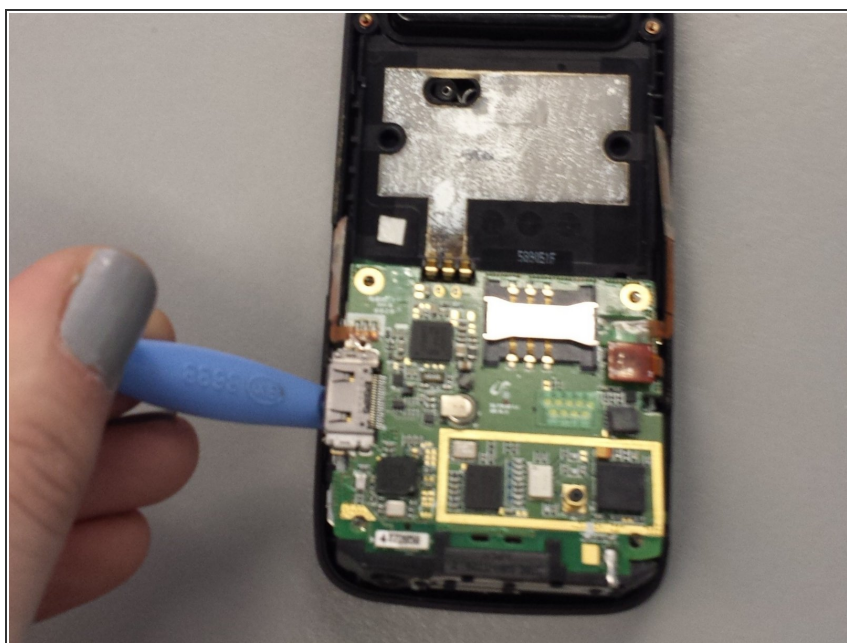

- Use the small plastic opening tool to gently remove the motherboard from the rest of the phone.

## Step 7

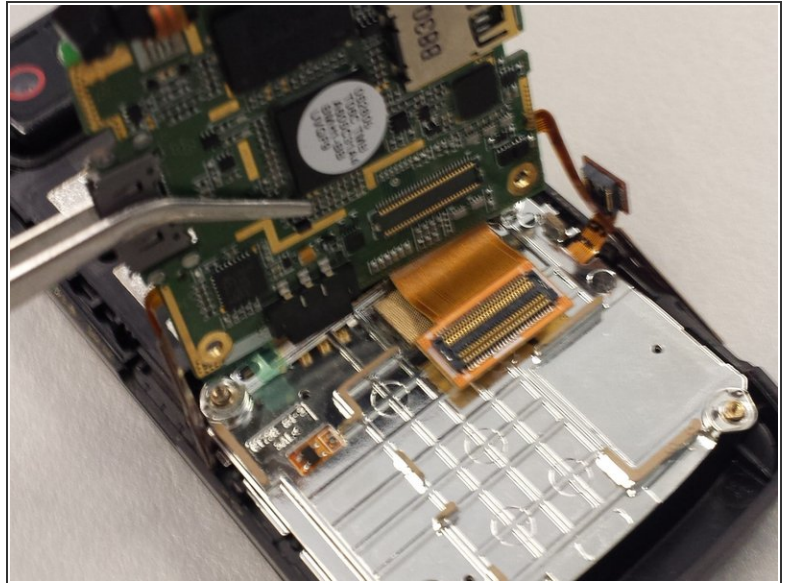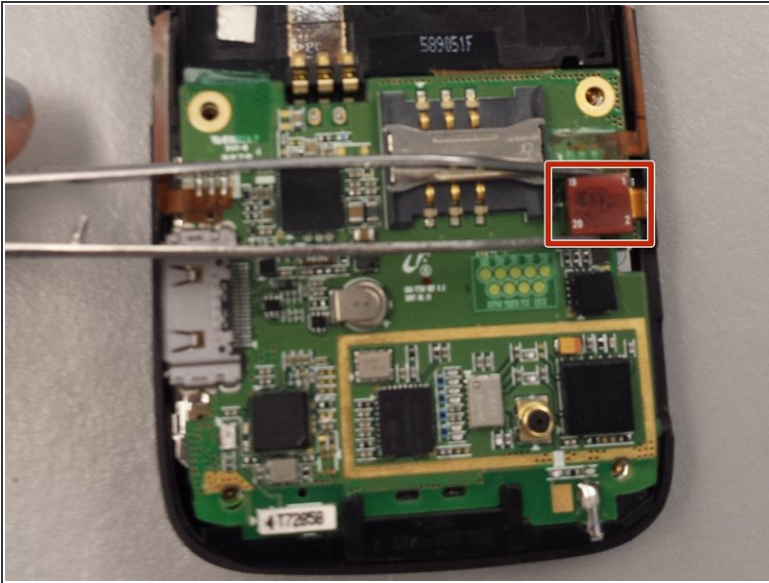

- Gently grab the motherboard with tweezers, then disconnect it from the two attached plates.

To reassemble your device, follow these instructions in reverse order.