




Waring Pro SB30 Hot Plate Replacement

Removal of the hot plate in case of damage or need of cleaning.

Written By: Sun Fai Lau

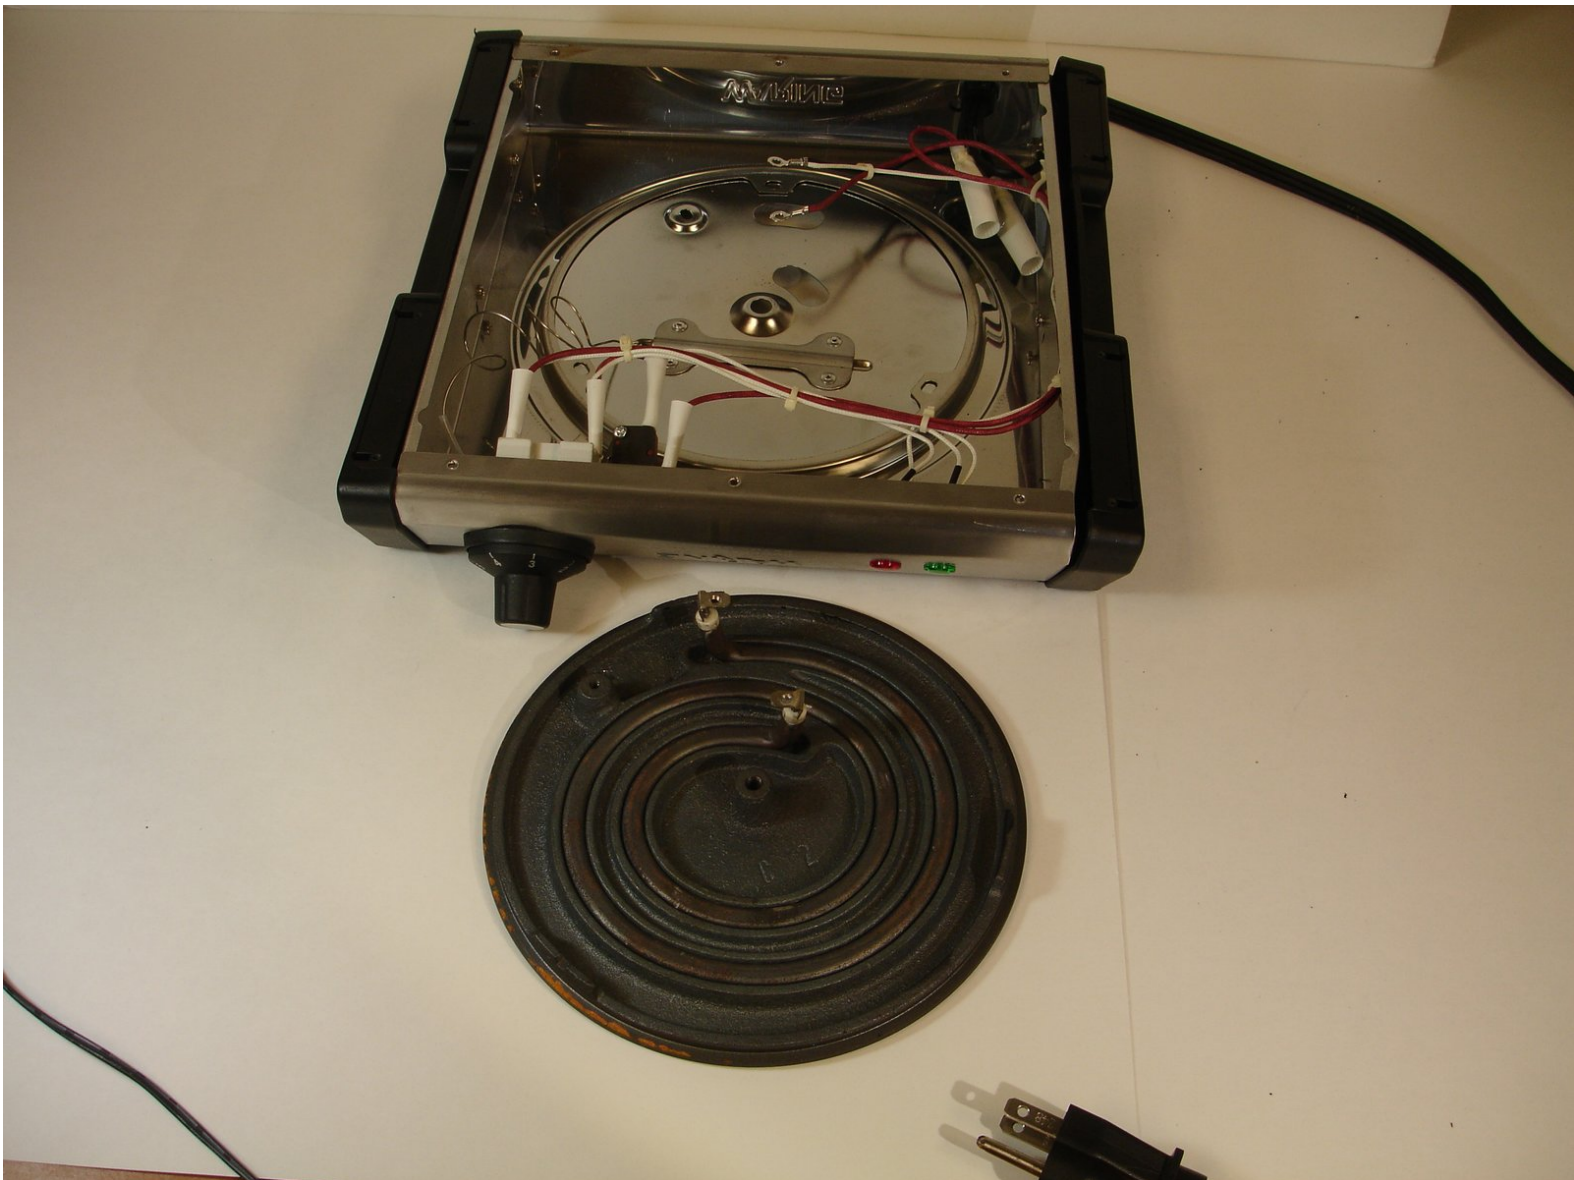

INTRODUCTION

The hot plate is held in place by multiple screws along the burner ring and electrical wires. When free from the frame, take care when removing the iron plate itself as it is fairly dense.

TOOLS:

- [Phillips #1 Screwdriver](#) (1)
 - [Smart Wrench](#) (1)
-

Step 1 — Back Panel




- Remove the screws on the back panel with the #1 Phillips screwdriver bit.
- The screws in the rubber legs of the burner do not need to be removed.
- ⓘ If the back panel has never been opened before, the screws may be more difficult to unscrew.

Step 2





- Using a wrench, remove the bolt from the center of the back panel.

Step 3

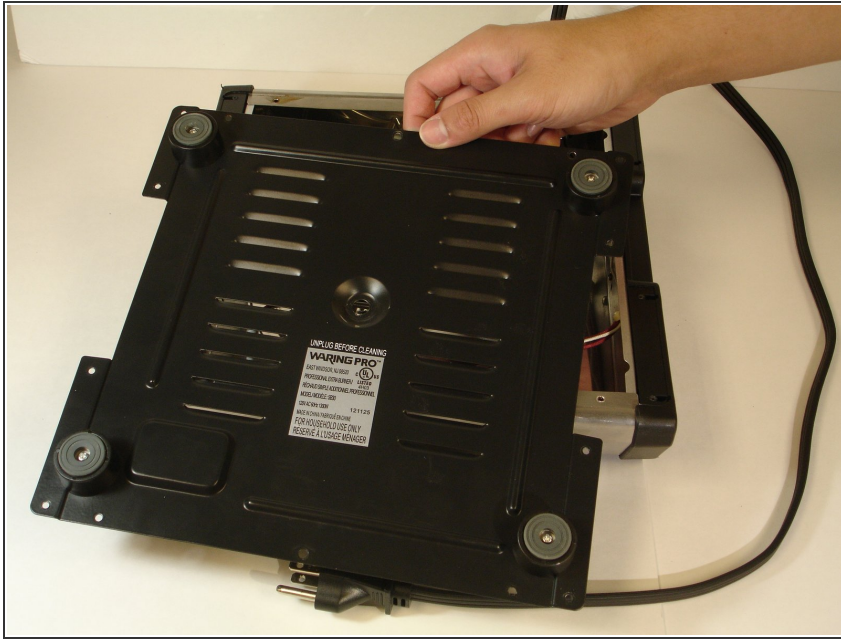

- The back panel can now be easily lifted off.

Step 4 — Hot Plate

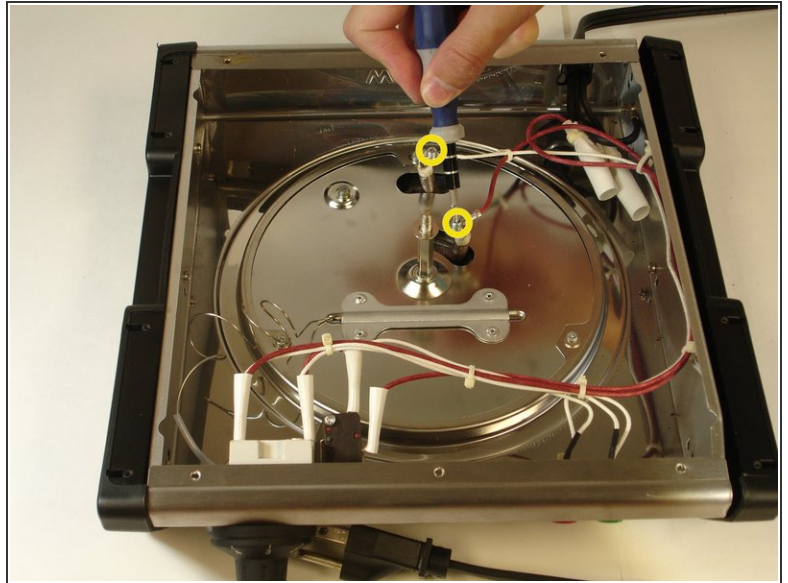
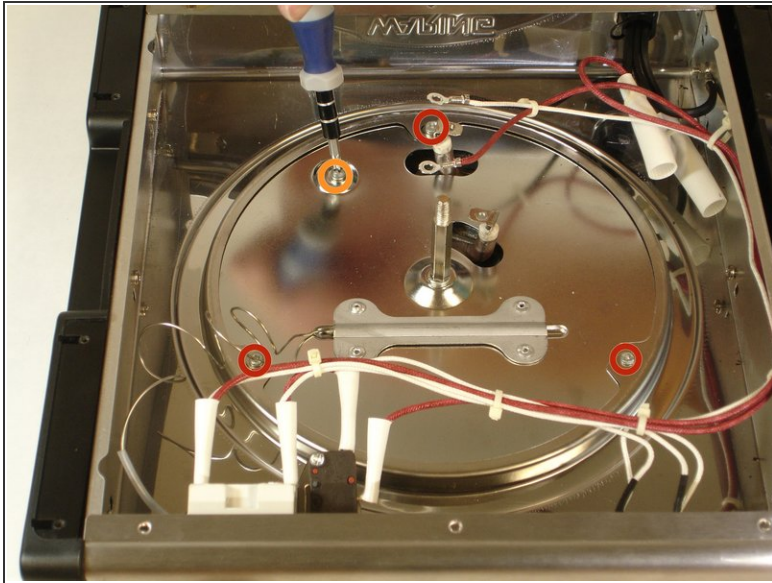


- Remove screws #1 Phillips screwdriver bit.

⚠ The interior edges of the metal frame are sharp and can cause minor cuts.



- 3 screws on the perimeter of the circle
- 1 screw in the circle
- 2 screws on the electrical stands with wires

Step 5

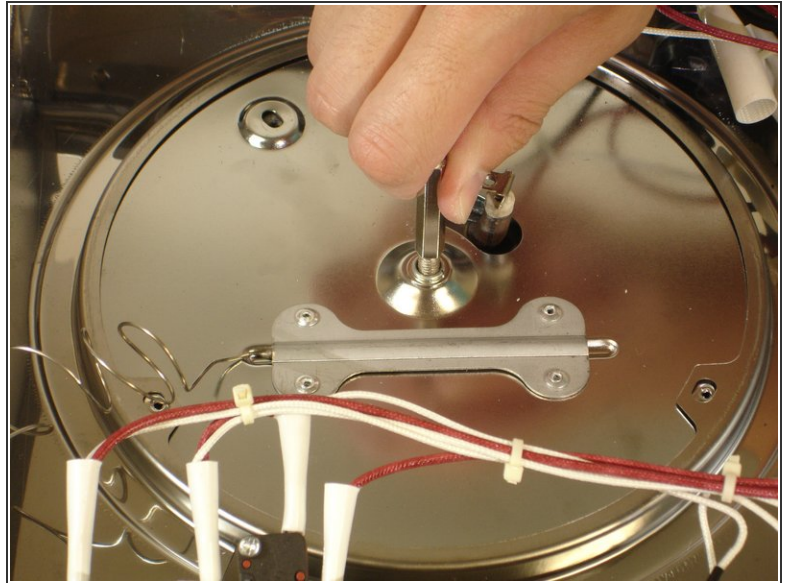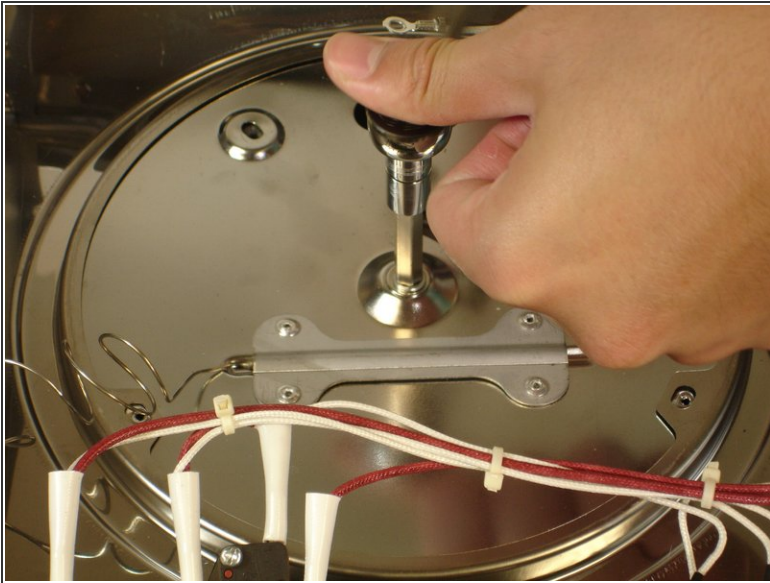

- Remove rod from the center of the plate with a wrench.

Step 6

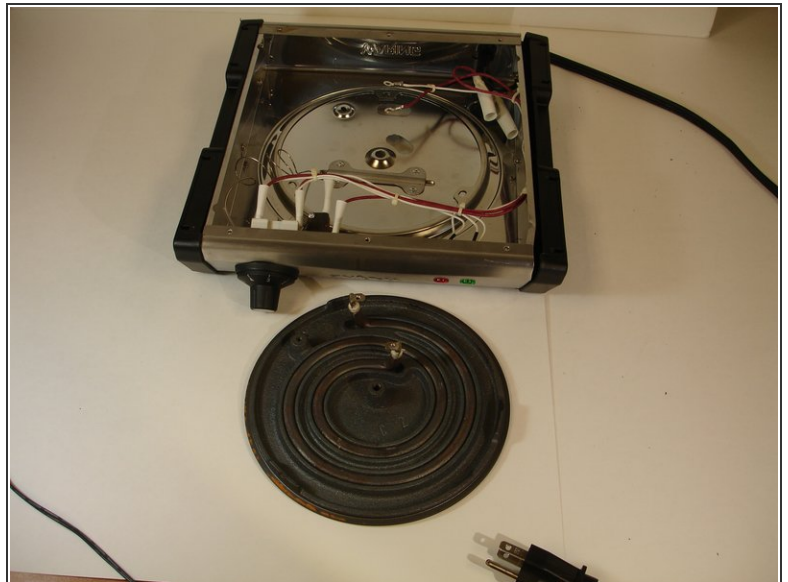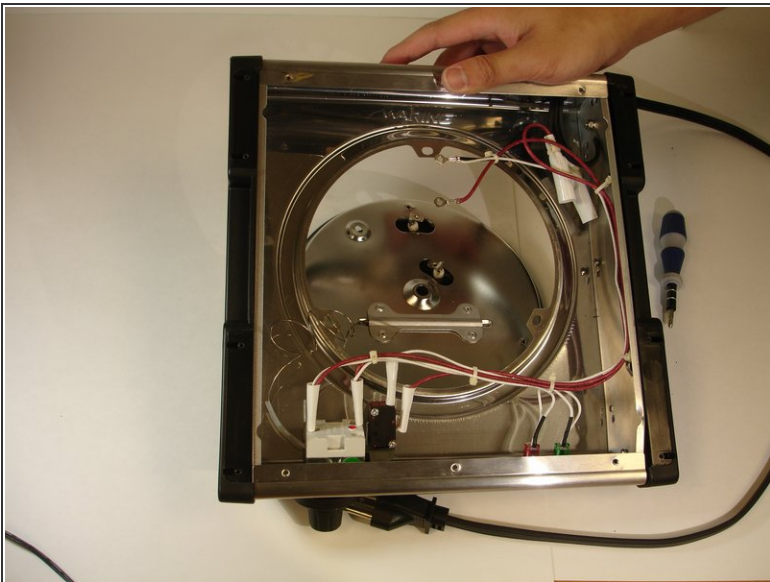

- Remove plate carefully as to not damage internal components i.e. insulator, metal frame, wires, etc.

To reassemble your device, follow these instructions in reverse order.