



BLU Studio 5.0 S II Camera Replacement

This guide will show you to replace the camera on the BLU Studio

Written By: Maria Juzaino




INTRODUCTION

This guide will show you a step by step guide on how to replace a camera on the BLU Studio 5.0 S II.

TOOLS:

- [iFixit Opening Tools](#) (1)
 - [Tweezers](#) (1)
 - [Phillips #00 Screwdriver](#) (1)
-

Step 1 — Remove back cover

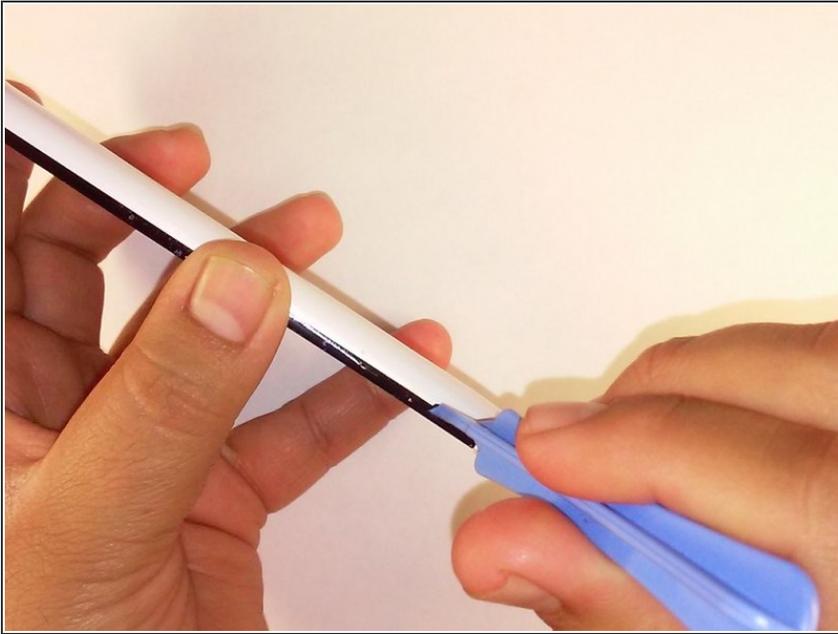

- Remove the back cover of phone with the plastic opening tool.

Step 2 — Remove battery




- Remove the battery with the plastic opening tool.

Step 3 — Remove screws





- Use the Philips #00 screwdriver to remove the nine screws that the top back part of the phone has.

Step 4 — Remove the plastic backing of phone

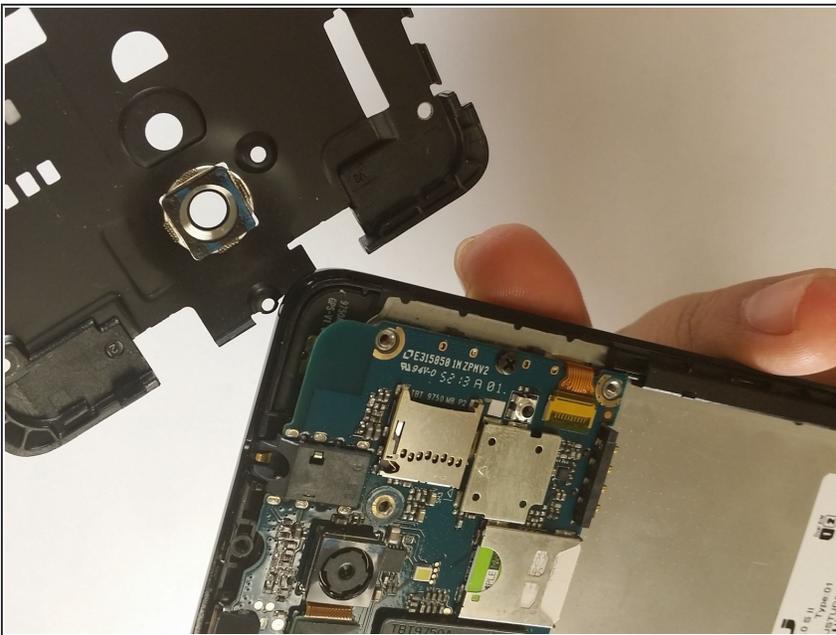

- Once you take off the screws off the phone remove the plastic backing .

Step 5

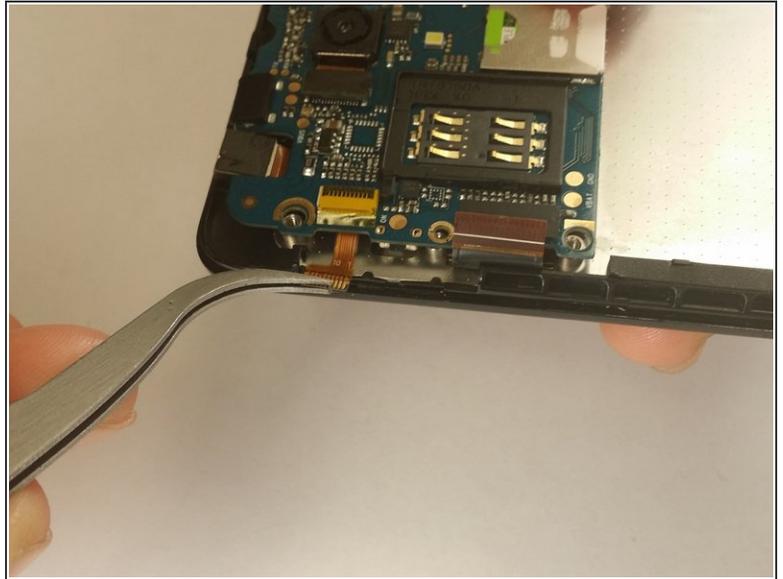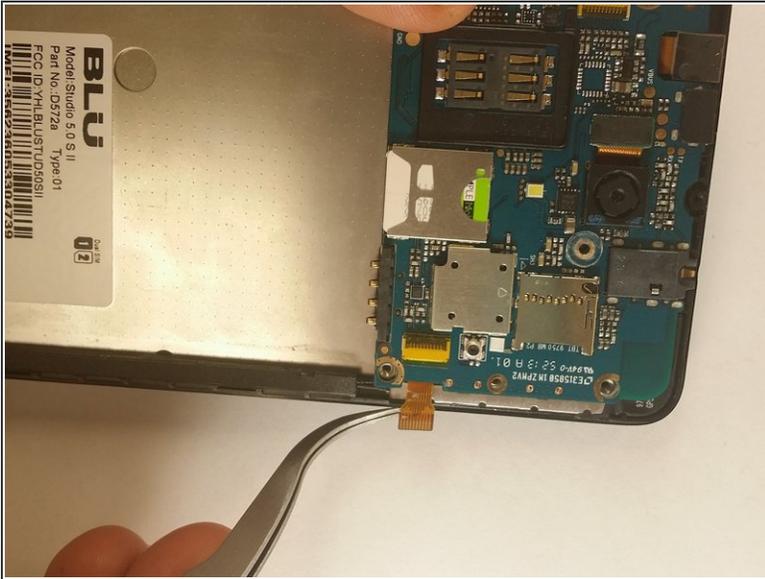

- Remove the ribbon cable carefully on all four sides of the motherboard of the phone.

Step 6 — Remove screws from motherboard



- Take off the four interior screws that are on the motherboard of the phone.

Step 7 — Remove plastic film



- Remove the ribbon cable next to the camera carefully.

Step 8 — Remove motherboard



- Remove the motherboard of the phone and replace camera.

To reassemble your device, follow these instructions in reverse order.