



# Toshiba Excite 7 Front Facing Camera Replacement

Instructions for removing front facing camera.

Written By: Martin Bucheli



**TOOLS:**

- [iFixit Opening Tools](#) (1)
- [Tweezers](#) (1)

**PARTS:**


- [Toshiba Excite 7 Front Facing Camera](#) (1)

## Step 1 — Battery Removal





- Remove the back cover.
- Work your fingernail or flat object under the cover's seal. Start at the top right corner just above the front facing camera this is the device "Weak Spot".
- After you pry open the first clip slide the flat object along the perimeter of the cover until the cover is removable. You should hear the clips pop open.

## Step 2 — Remove Tape

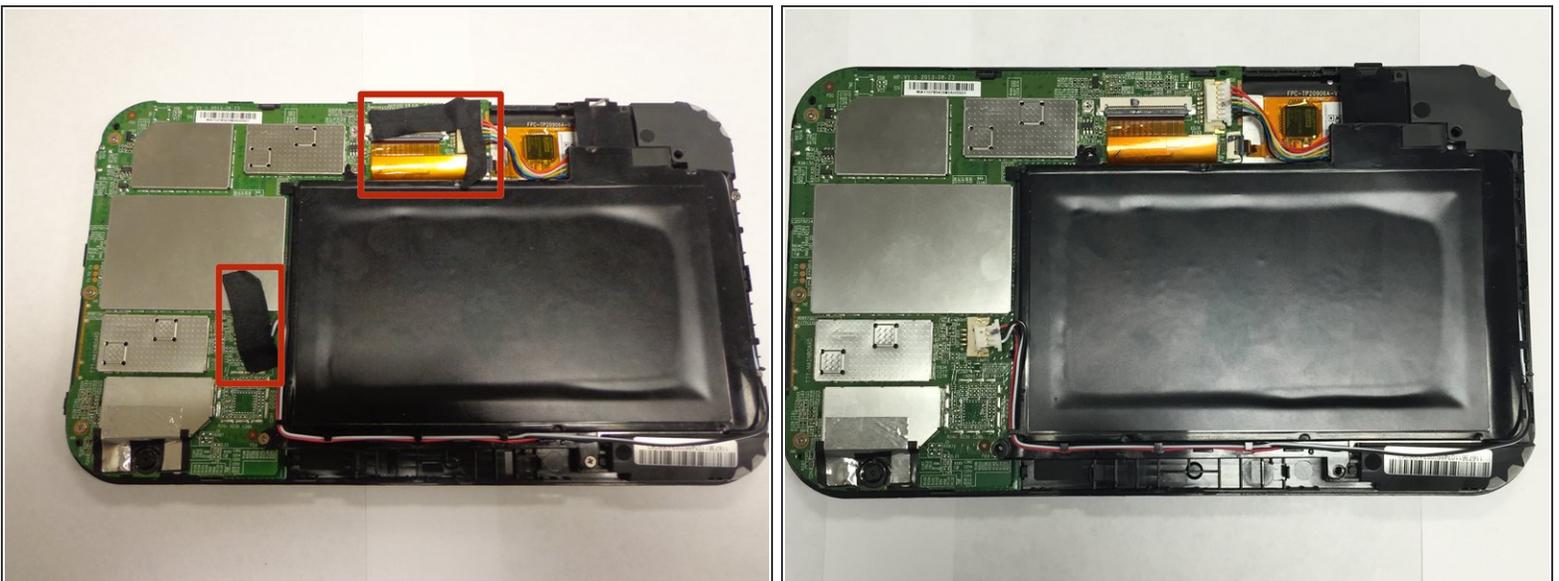



- Remove any black tape from the device.
- Keep the tape, you will need to put it back on when you are done.

### Step 3 — Unplug Wires

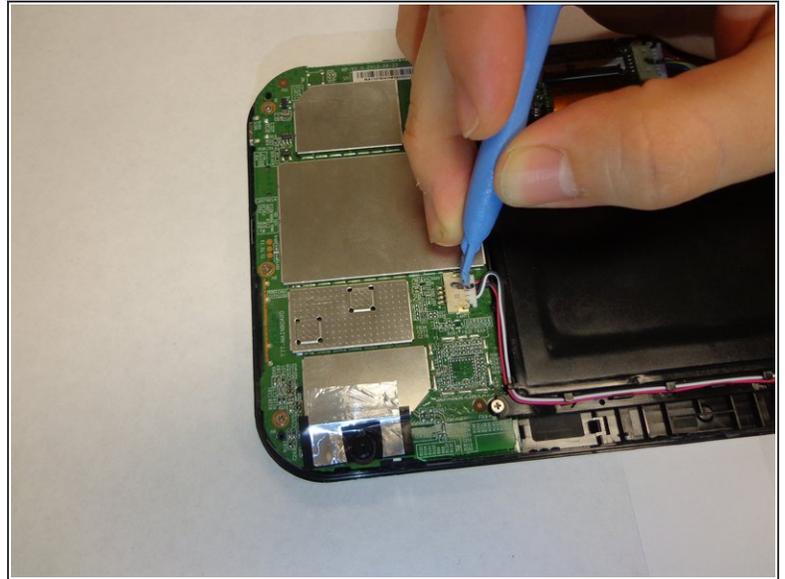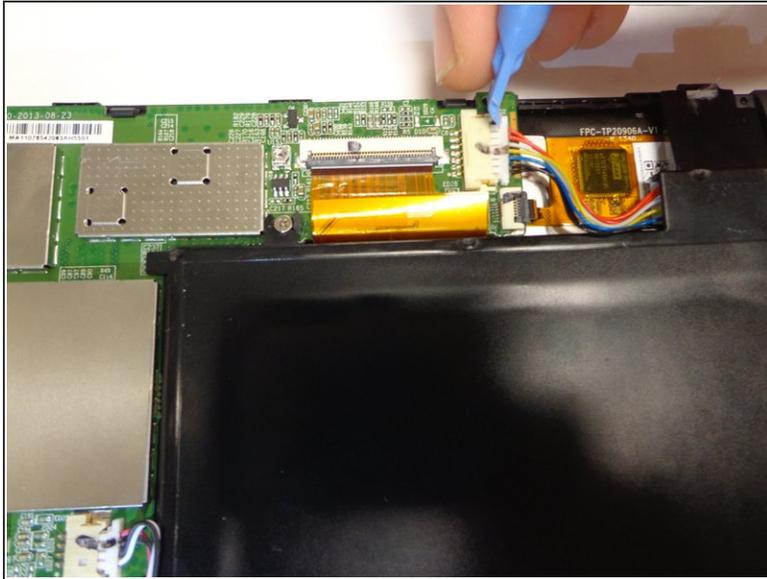



- Unplug the wires from the battery.
- ⓘ The battery is the black rectangle in the middle of the device. The device has two wiring harnesses attached to it, one just above the battery and one just to the right.

## Step 4 — remove screws

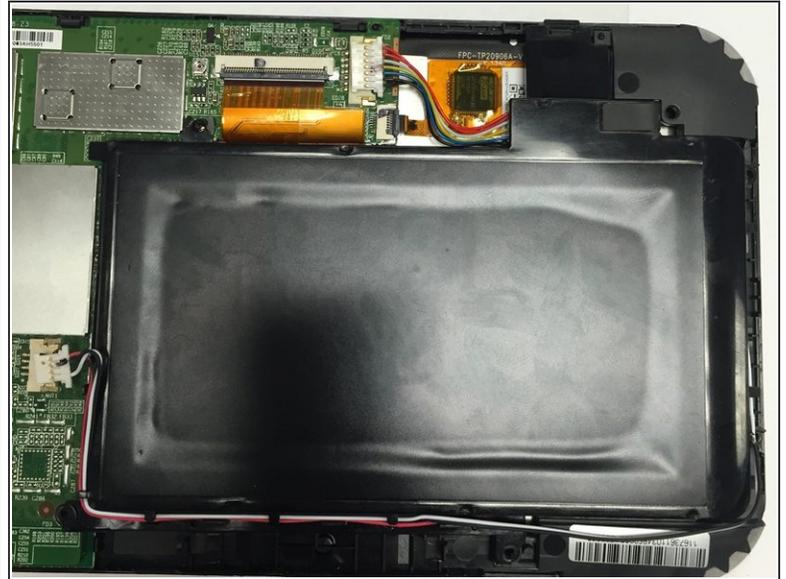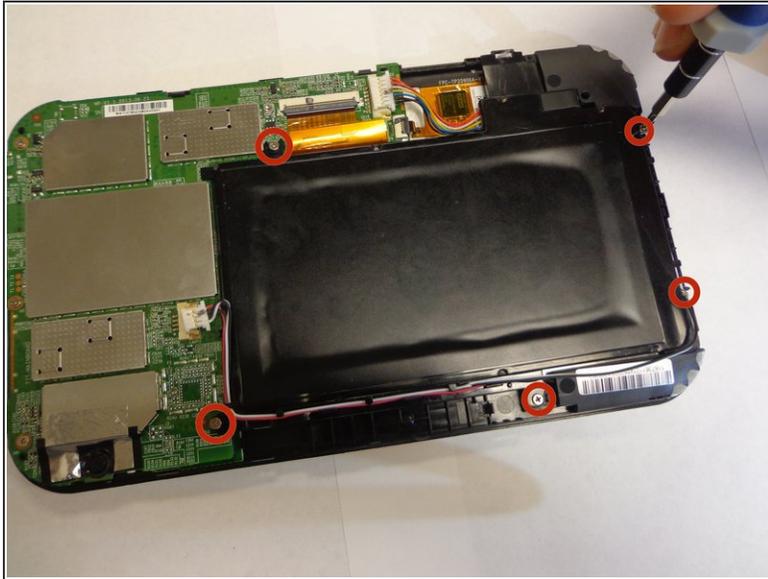

- Unscrew the battery from the device.
- The device has 5 screws to remove, keep the screws.

## Step 5 — Unclip and remove battery

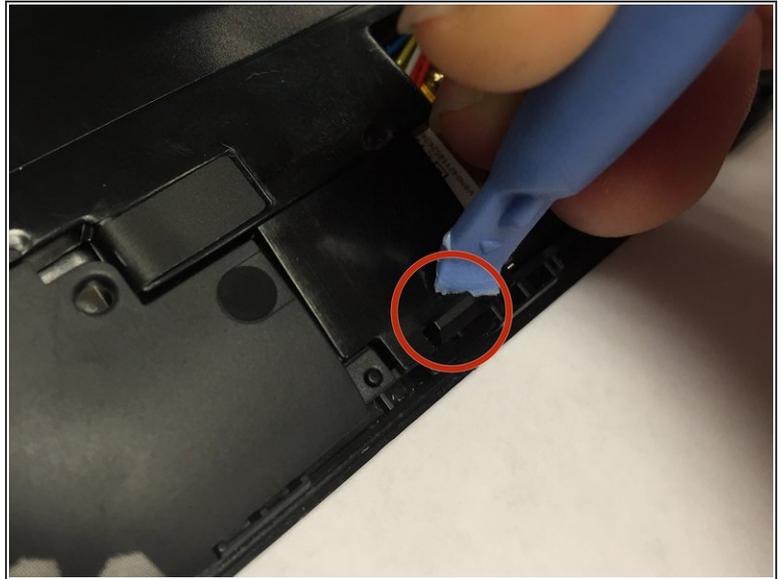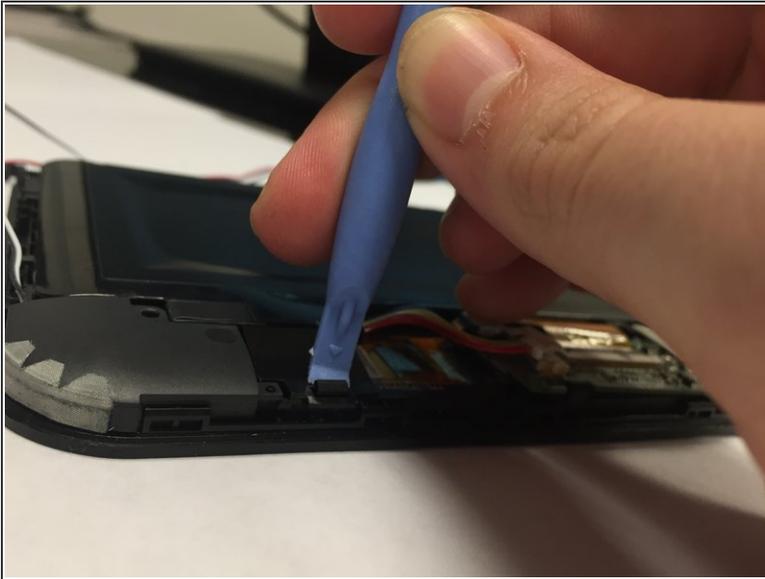


- i** The battery has one clip you will need to remove. The clip is located at the bottom right corner of the battery just above the right speaker. The speakers and wires are not secured to the battery, they may fall off.
- Push the clip back then lift the battery up.

## Step 6 — Unscrew circuit board




- Remove the the remaining 3 screws to unfasten circuit board. Keep the screws.

## Step 7 — Removing data cables

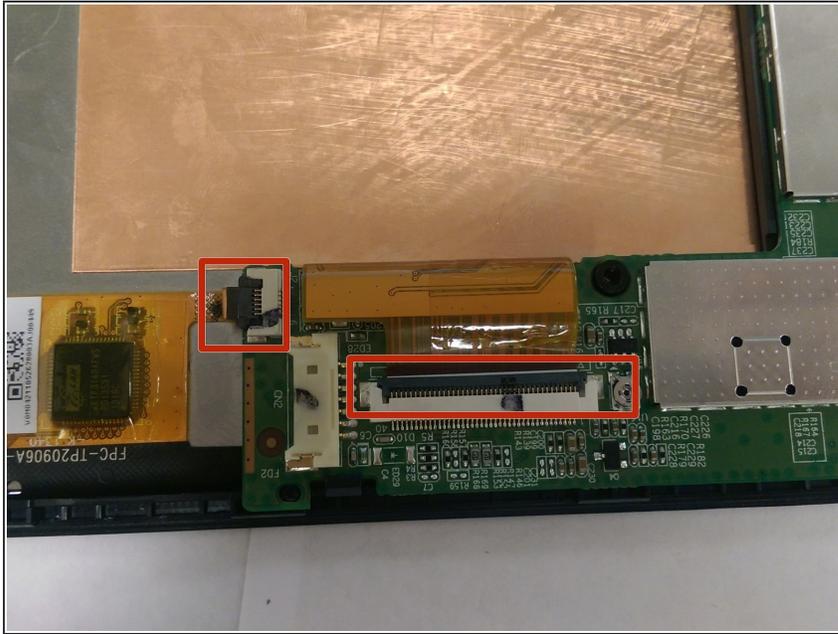


- The screen is connected to the circuit board by 2 “Data Cables” (orange ribbons). Data cables include 3 working components, data cables, the white harness plug, and the black lever.
- Gently flip the black cover up and unplug data cables.

## Step 8 — Removing circuit board

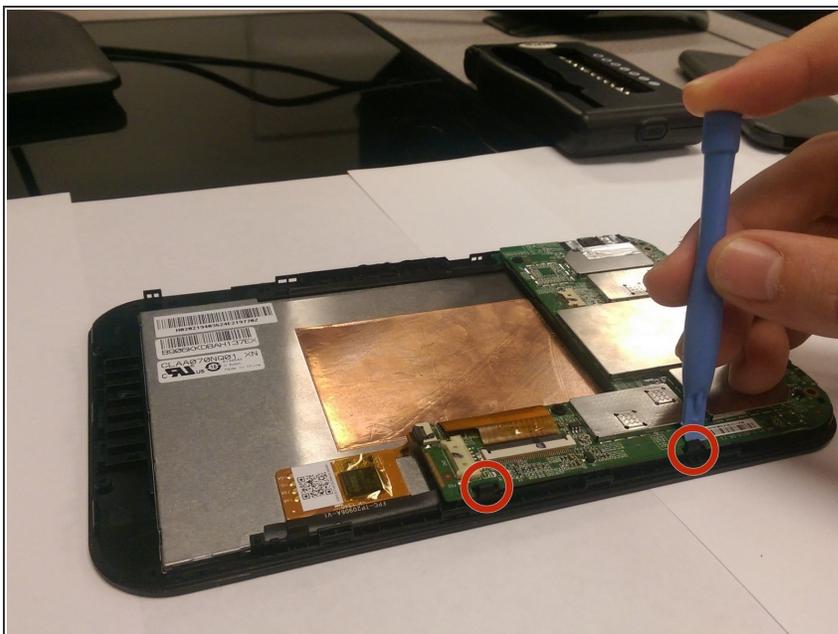

- Remove the circuit board by gently coaxing it from the clips located just to the right of the circuit board.

## Step 9 — Removing Front Facing Camera

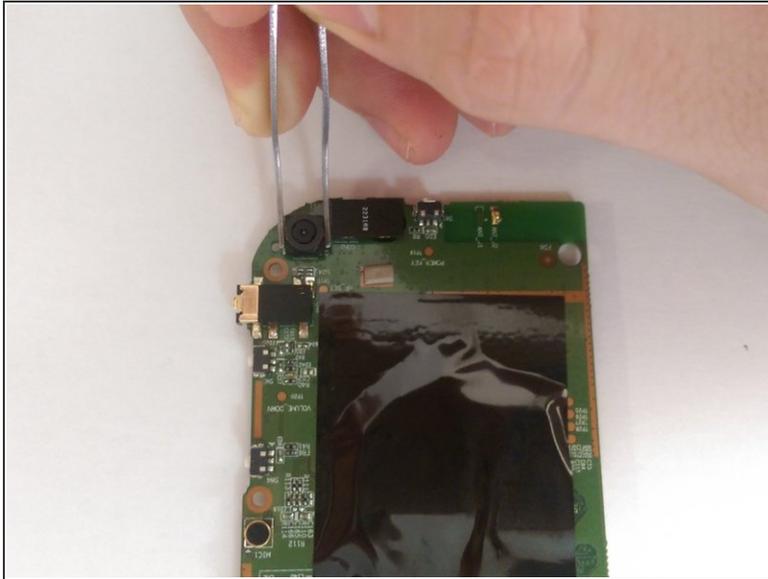

- Flip the circuit board over, the camera is the small black square with the circle in the middle.
- Gently unplug the camera from the circuit board and plug the new camera back into the socket. Repeat steps in reverse order to reassemble device.

To reassemble your device, follow these instructions in reverse order.