



2011-2013 Scion tC Radio Head Unit Replacement

How to replace the radio head unit

Written By: Dylan Smith



INTRODUCTION

This guide will teach how to safely remove and replace the radio head unit of the car.



TOOLS:


- [Phillips #1 Screwdriver](#) (1)
-

Step 1 — Radio Head Unit



- Remove the dashboard panel around the radio head by pulling on the bottom of the unit.

Step 2

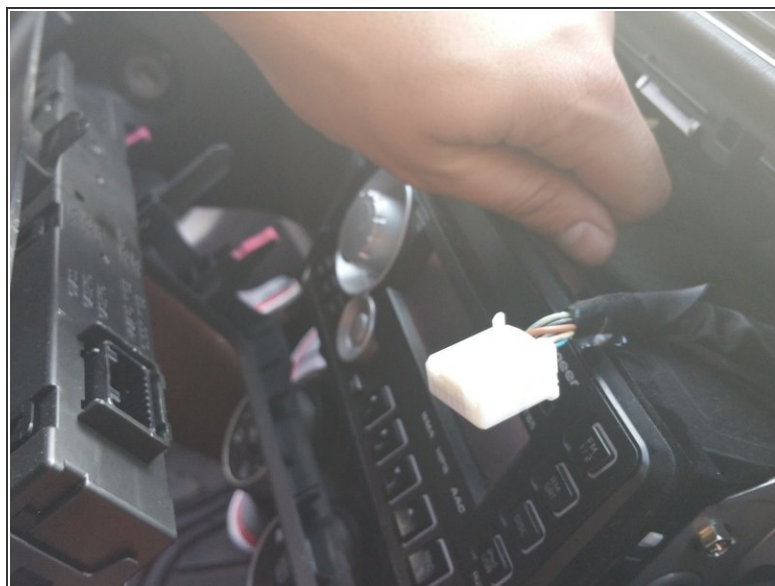


- Remove the wire header connected to the panel by pressing inward on the tabs.

Step 3





- Remove the four #2 12mm screws securing the head unit in the housing

Step 4

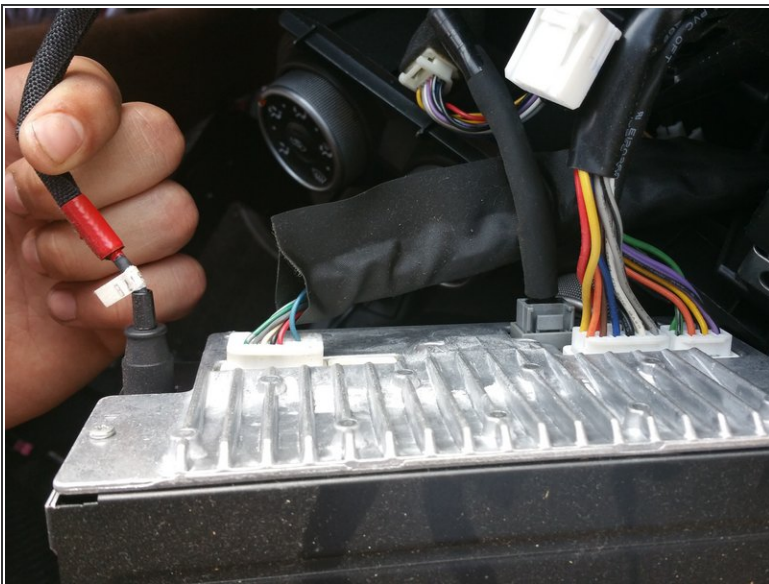

- Remove each bundle of wires that is connected to the back of the head unit.

Step 5

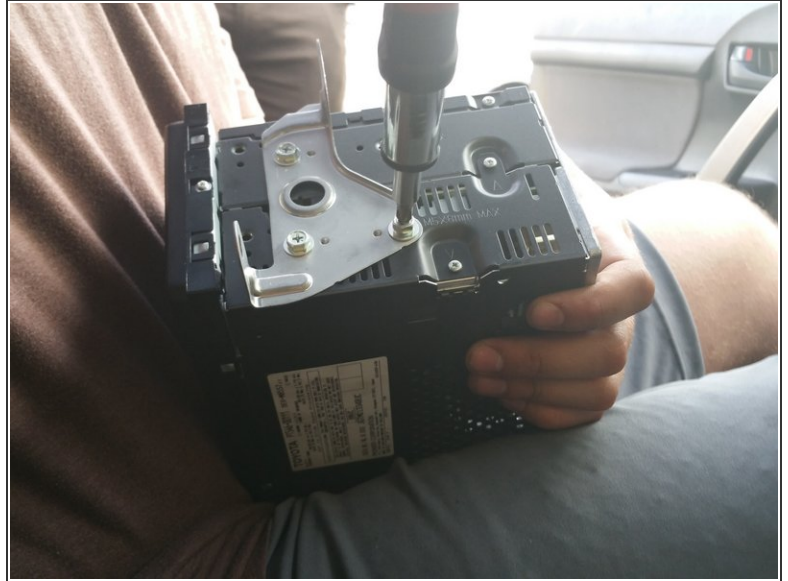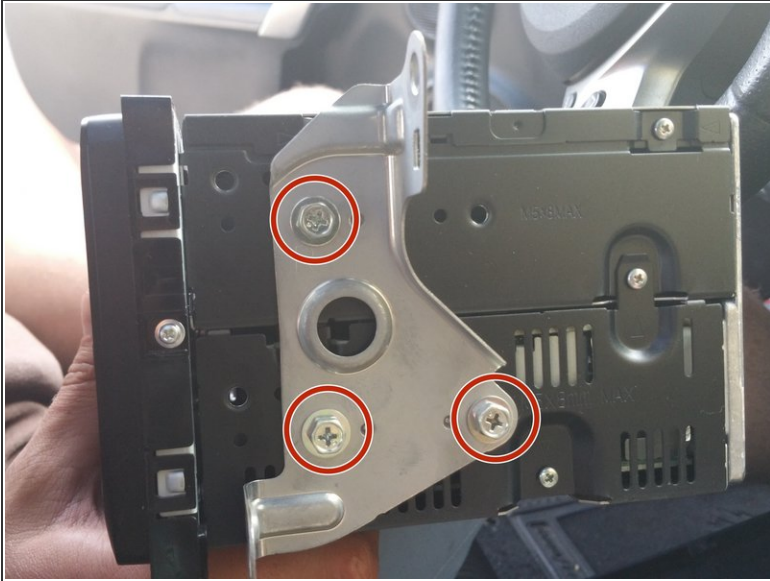

- Locate the metal brackets on the side of the head unit.
- Use a Philips head screwdriver, remove the three #2 25mm screws from both support brackets on the side of the head unit

Step 6



- Screw the support brackets to the new radio head unit
- ⓘ Note that the brackets are unique to the car. They will not come with your new head unit.

To reassemble your device, follow these instructions in reverse order.