



# HP iPAQ h4155 Face Plate Replacement

Written By: John Pagliero



 **TOOLS:**

- [T5 Torx Screwdriver](#) (1)
  - [Tweezers](#) (1)
  - [Phillips #00 Screwdriver](#) (1)
  - [iFixit Opening Tool](#) (1)
-

## Step 1 — Battery



- While sliding the silver release tab up, simultaneously lift the cover up from the left side.

## Step 2



- Push the tab left to right to remove the cover.

### Step 3



- Now, lift the battery up and away from the device to remove it.

### Step 4 — Back Case



- Remove the four silver screws using the T5 Torx Screwdriver (T5 x .25 in).

## Step 5



- Remove the single black screw that is located beneath the HP sticker with the T5 Torx Screwdriver.

## Step 6



- Next, use your plastic removal tool to separate the gray back from the black center piece.
- For better results, start the separation at the corner piece.

## Step 7




- Remove the back case.

## Step 8 — Face Plate



- Now that the back cover is removed, use the #00 Philips x .17 screwdriver to remove the small screw to the left of the SD card slot.


## Step 9

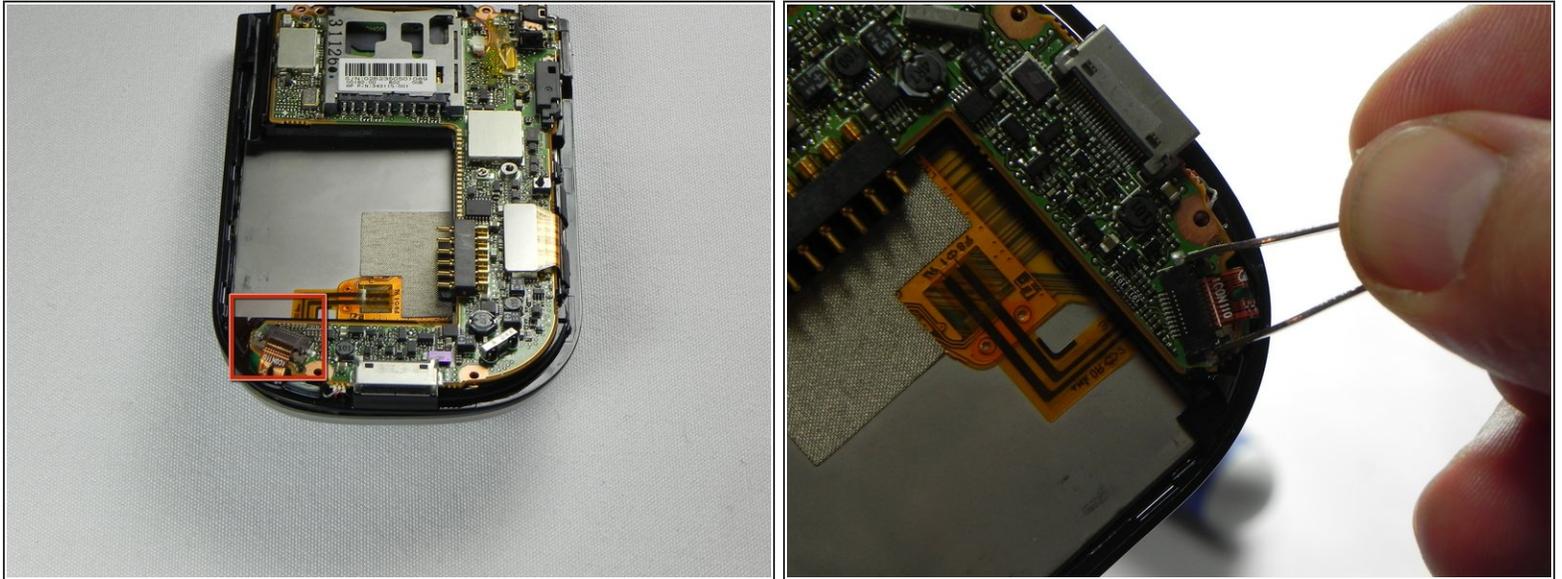

- Next, unlock and remove the ribbon cable.
- Using metal tweezers, carefully pull back on both sides of the brown bar unlocking the cable and slipping it out of the connector.


**⚠ The bar, the connector, and the cable are fragile components that are easily broken.**

## Step 10

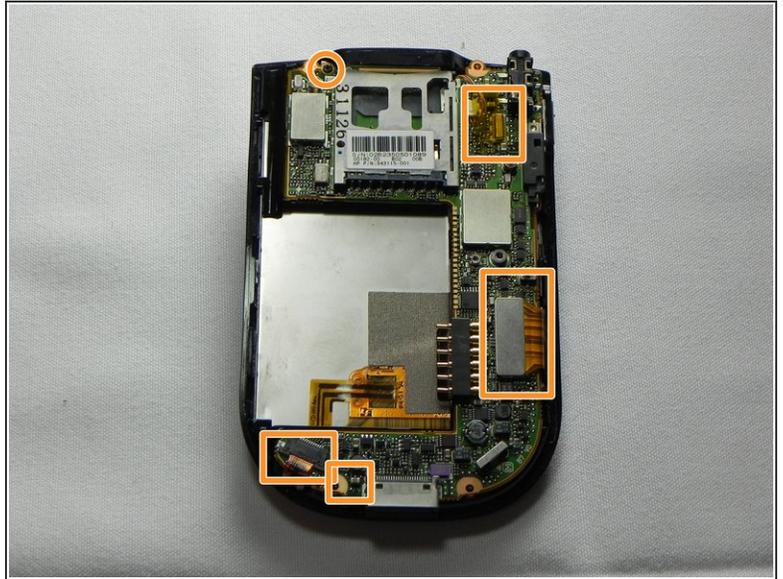

- Next, remove the wire from the bottom of the mother board.
- ⓘ The easiest method is to use metal tweezers and grip the plug closest to the connector.
- Make sure all the connections are properly disconnected before separation from the motherboard.

## Step 11

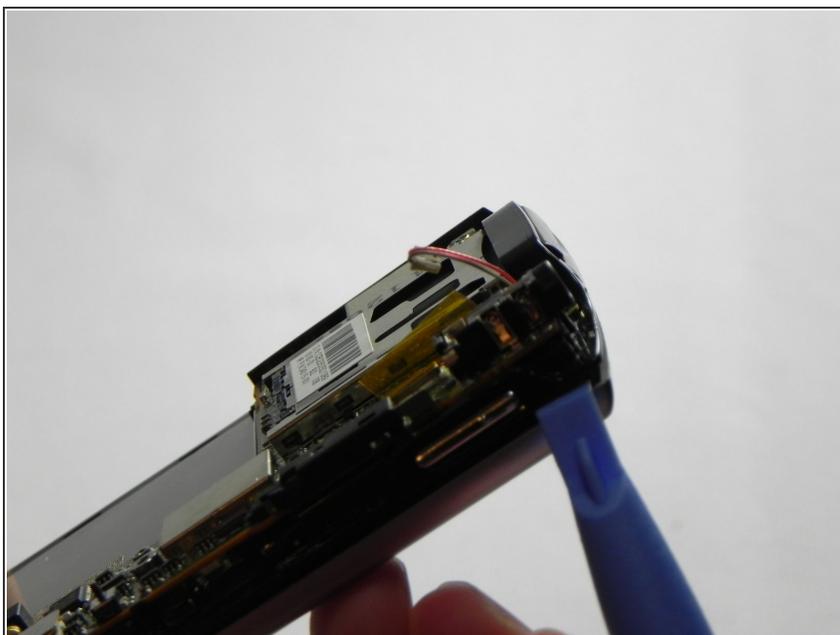

- Next, use a plastic removal tool and separate the silver front case from the black frame.

To reassemble your device, follow these instructions in reverse order.