



iView-776TPCII Rear Panel Replacement

Replace the rear panel on your iView-776TPCII.

Written By: Jonathan Fenimore



INTRODUCTION


This guide will show you how to open your tablet in order to view/repair its inner parts! Also, if you have a cracked or broken rear panel this guide will aid you in its replacement. One must take extreme care when removing the rear panel from the device because impatient prying may cause your screen or rear panel to break.





TOOLS:

- [iFixit Opening Tools](#) (1)
 - [Spudger](#) (1)
-

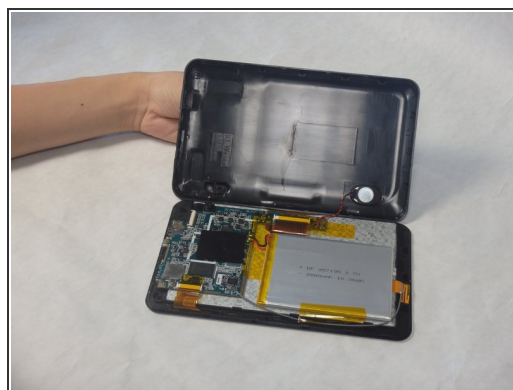
Step 1 — Rear Panel



 Before disassembling your device, make sure that the power is completely turned off.

- Use the plastic opening tool to release the clips holding the rear panel of the device onto the front section.
-  The clips may take some pressure before releasing.
- Continue around the entire device until all of the clips have been released.

Step 2

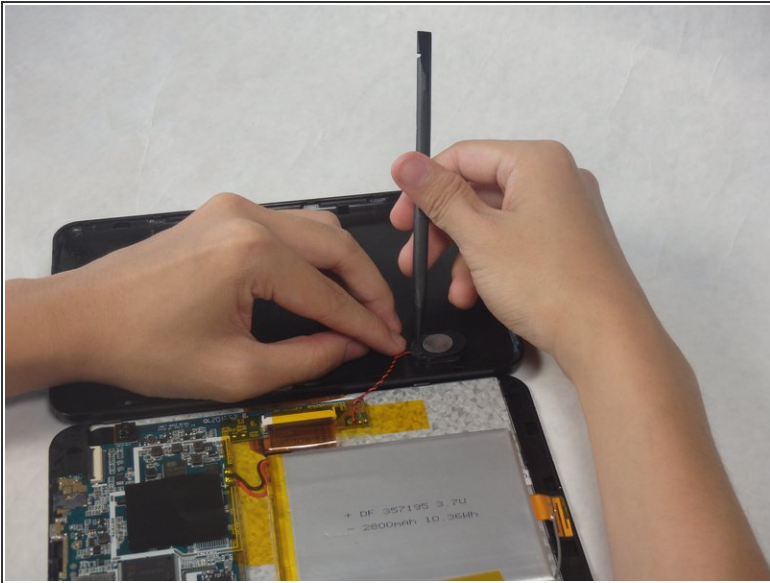

- Use a spudger to carefully free the speaker from it's housing on the back panel.
 - Place the spudger between the speaker and the rear panel. Use a prying motion to remove the component.
- ⚠ Be careful not to apply an over amount of force. If care is not taken, the speaker could break under the pressure.

To reassemble your device, follow these instructions in reverse order.