



HTC Touch Pro 2 Keyboard Replacement

Written By: Melinda Phan



TOOLS:

iFixit Opening Tool (1)

T5 Torx Screwdriver (1)

Tweezers (1)

Step 1 — Battery




- Apply pressure and slide upward to remove back cover.
- Lift the back cover up away from the phone.

Step 2



- Lift battery upward on the upper right-hand side to remove it.
- Check the battery to make sure there's no bent corners

Step 3 — Housing

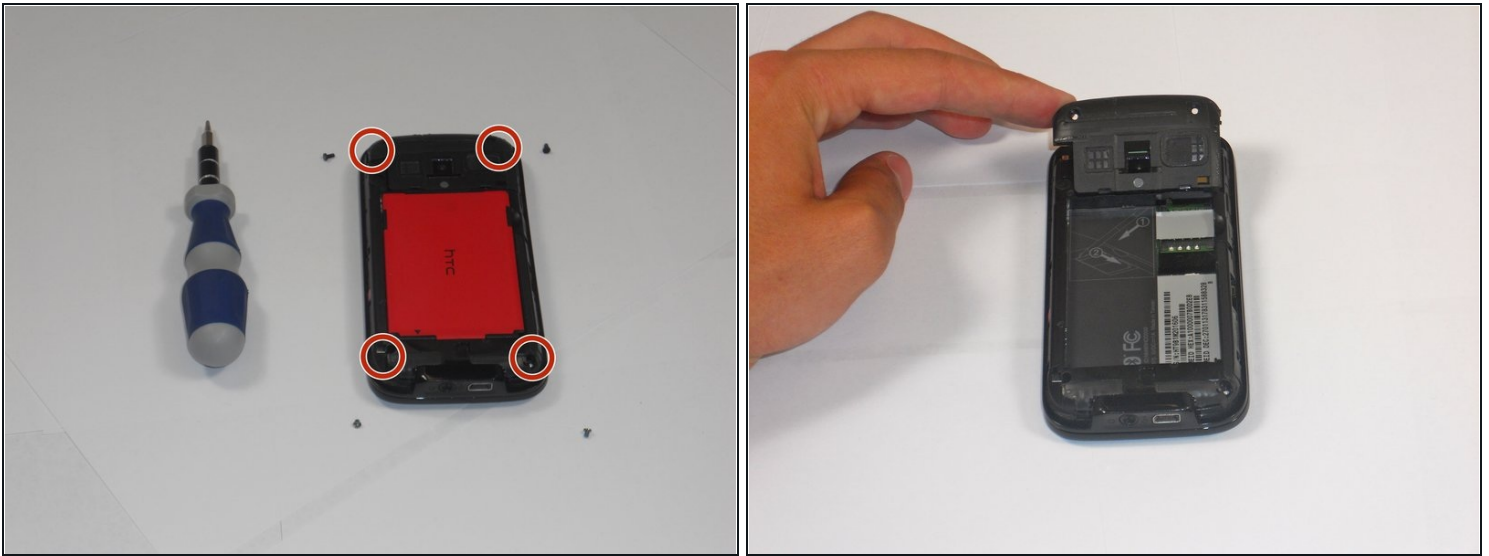


- Using a T5 screwdriver, remove the four screws in corners as shown.
- Lift the top portion of the rear case.
⚠ There is a ribbon attached on the back of this part that requires caution to remove.

Step 4




- Using an iFixit Plastic Tool, detach the plastic casing from the keyboard. This may require some force.
- Using a spudger or other thin tool, carefully pry up ZIF connectors as shown. This will allow the black ribbons to detach from the keyboard.
- Slide the two parts away from each other so that the black ribbons slide through the slots and you will now have housing into two parts.

Step 5 — Keyboard

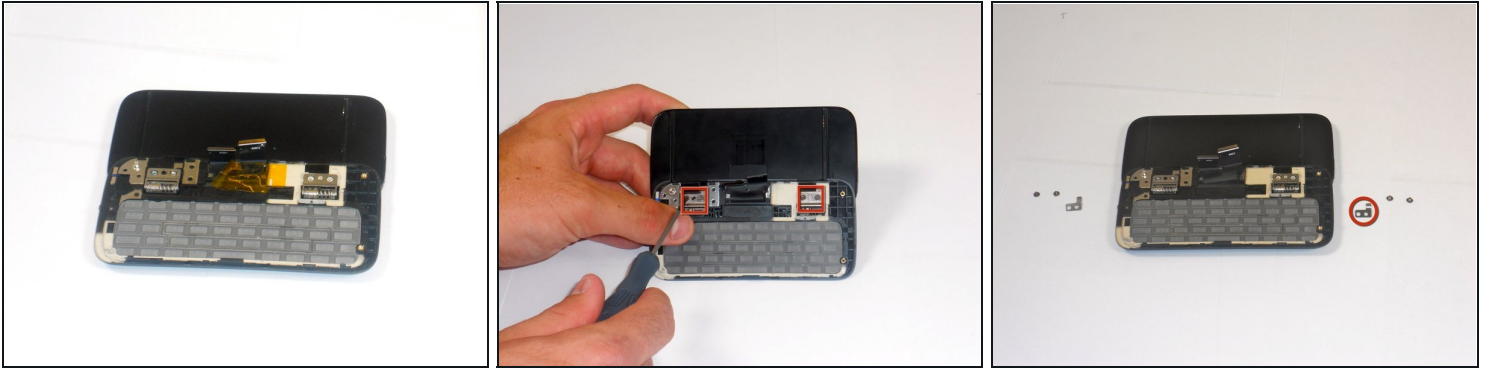

- Peel off the yellow ribbon shown slowly.
- Unscrew the four screws shown in red squares (two in each square) using a 00 screwdriver.
- After the screws are out, you will be able to easily take off the small metal pieces circled in red. Please do so.

Step 6

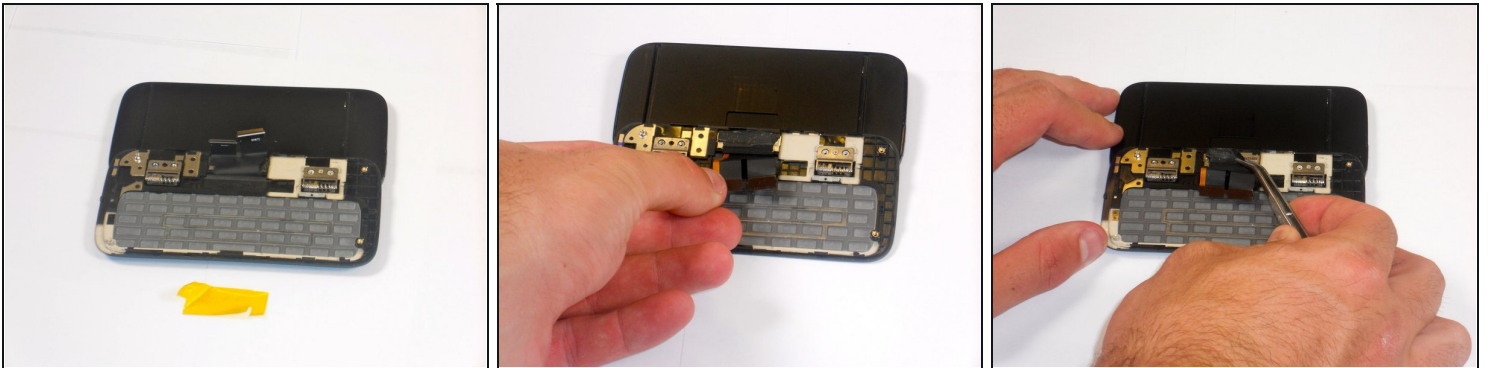

- Slowly pull dual black strip off using force.
- Behind the dual black strip is very sticky piece of grey tape. Use [tweezers](#) (preferably ones with ridges) to peel off the tape. Be careful not to rip it.

Step 7



- Lift ZIF connectors up.
- Carefully lift keyboard frame away from display screen.
- You now have the keyboard detached.

To reassemble your device, follow these instructions in reverse order.