


# VTech Kidizoom Camera Connect Power Distribution Circuit Board Replacement

The power distribution circuit board relays the power from the batteries, to the different components of the camera via a few wires. Replacing this component may resolve the issue of the device not turning on.

Written By: Justin Sanchez

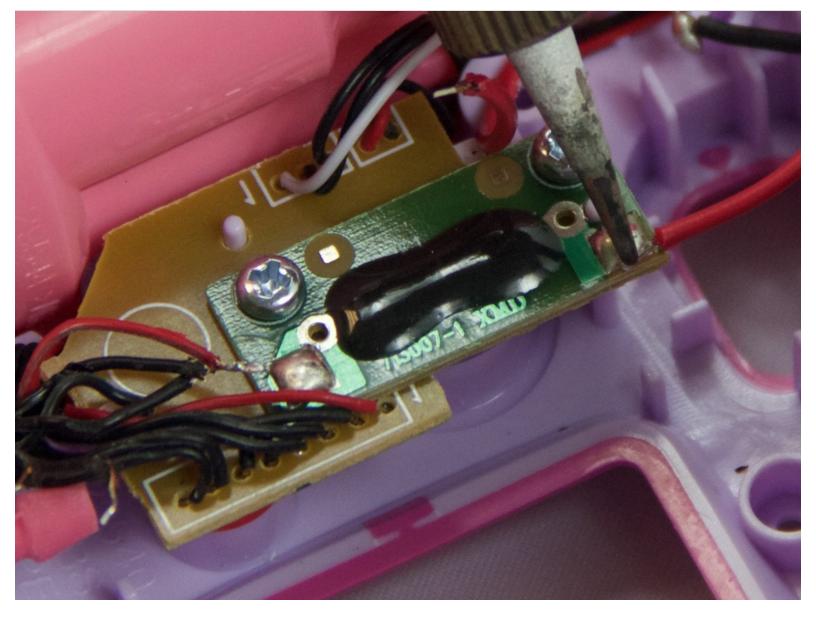

## INTRODUCTION

Use this guide to remove and replace the power distribution circuit board.

# **TOOLS:**

- Soldering Iron (1)
- Metal Spudger (1)
- Phillips #0 Screwdriver (1)

#### Step 1 — Front Case



Remove batteries and SD card before beginning disassembly!

• Locate the four plastic screw covers denoted by the markers and gently pry them up with the metal spudger.

#### Step 2



Remove all four (11mm) screws with the Philips #0 screwdriver.

#### Step 3



- Remove the two battery cartridges located on the underside of the camera.
- Once cartridges are removed, use the metal spudger to pry open the top, bottom, and both sides of the camera.

#### Step 4




- Beware of the two black viewfinder lens falling out as you pry open the device!
  - The device should now be open and ready for further repair and/or replacement parts.

#### Step 5 — Motherboard



 Locate and remove the screws circled in the provided image with a Philips #0 screwdriver.

### Step 6

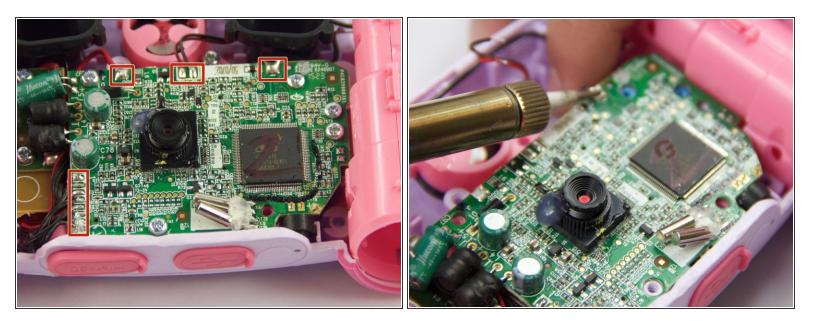


Unsolder the connection points on the motherboard.

#### Step 7



 Unsolder the connections to the right battery terminal. Removing the terminal allows easier access to the motherboard.

#### Step 8

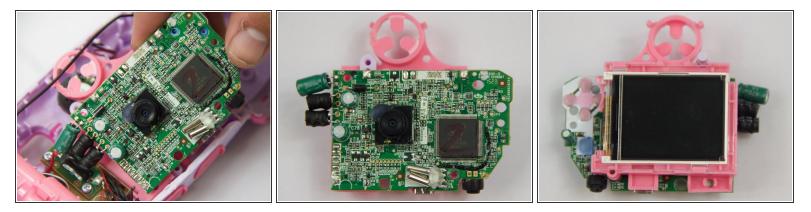


• Carefully pull up on the motherboard and pink plastic underneath the motherboard. The pink plastic contains the display and is connected to the motherboard.

#### Step 9 — Power Distribution Circuit Board




• Unsolder the wires connected to the power distribution circuit board.

#### Step 10

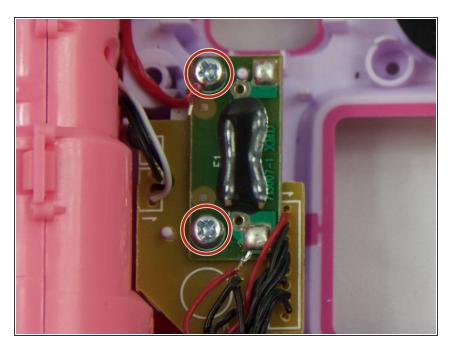

• Locate and remove the two screws that hold in the power distribution circuit board using a Philips #0 screwdriver.

## Step 11

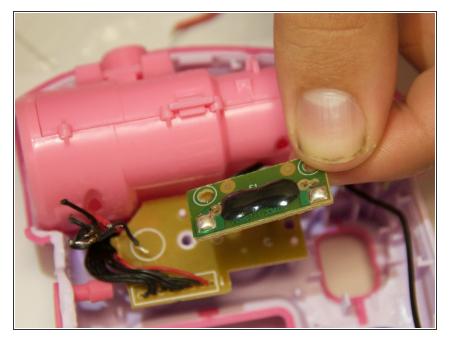

 Gently pull up on power distribution circuit board and remove it from the device.

To reassemble your device, follow these instructions in reverse order.