




How do I replace a broken buckle on my backpack?

A broken hook end (male end) of your buckle is easy to replace. We'll show you how in just a few easy steps.

Written By: VAUDE Reparaturteam

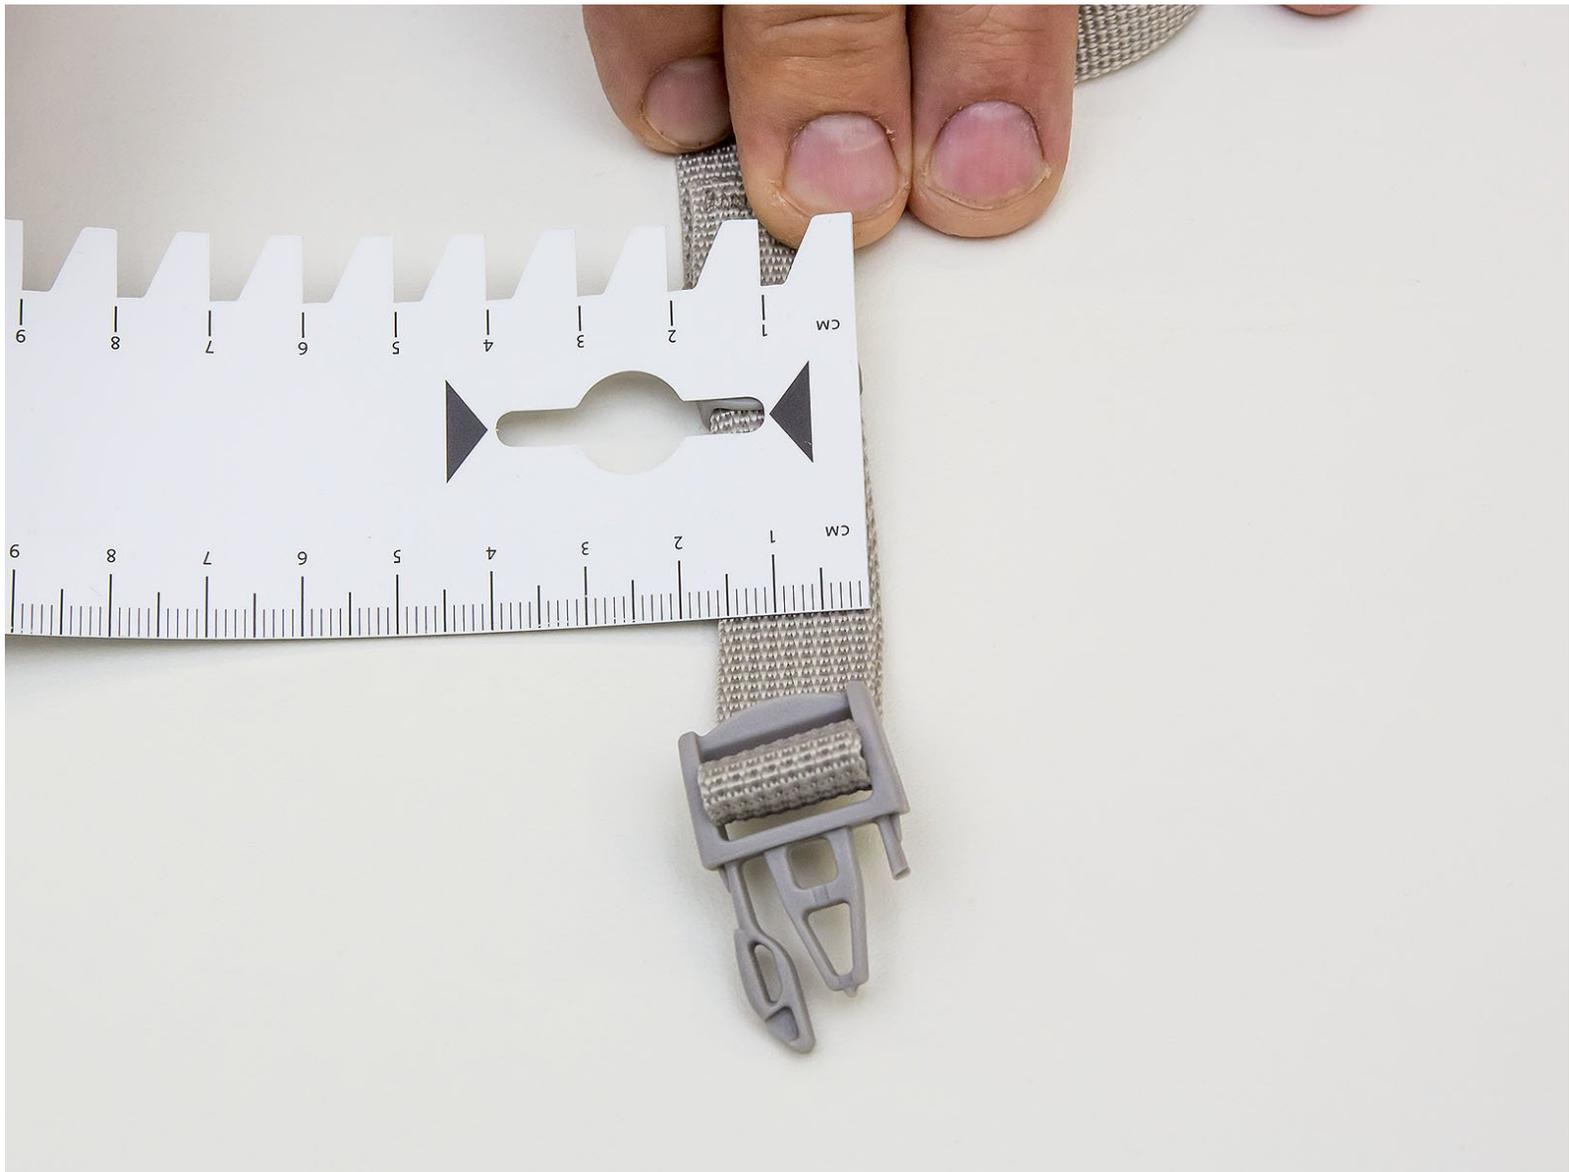

INTRODUCTION

If the hook end (male end) of your buckle is broken, it's easy to replace. We'll show you how in just a few easy steps.


TOOLS:

- [Flathead 3/32" or 2.5 mm Screwdriver](#) (1)
- [Measuring Tape](#) (1)

PARTS:


- [VAUDE Slide-in buckles Single Adjust](#) (1)
- [VAUDE Slide-in buckles Dual Adjust](#) (1)

Step 1 — Buckle on backpack

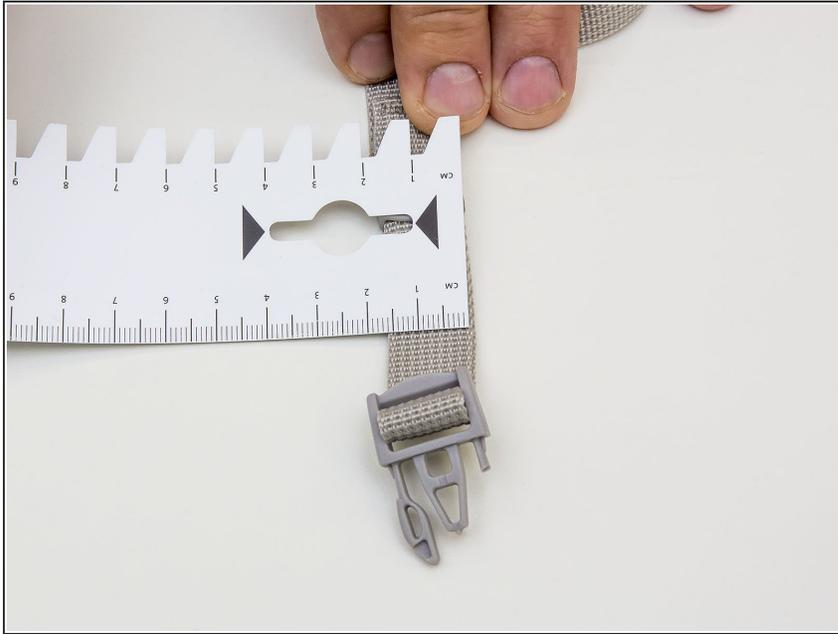

- In order to determine the correct buckle size, measure the webbing. The webbing illustrated here is 15 mm, so you would need a 15 mm buckle.

Step 2

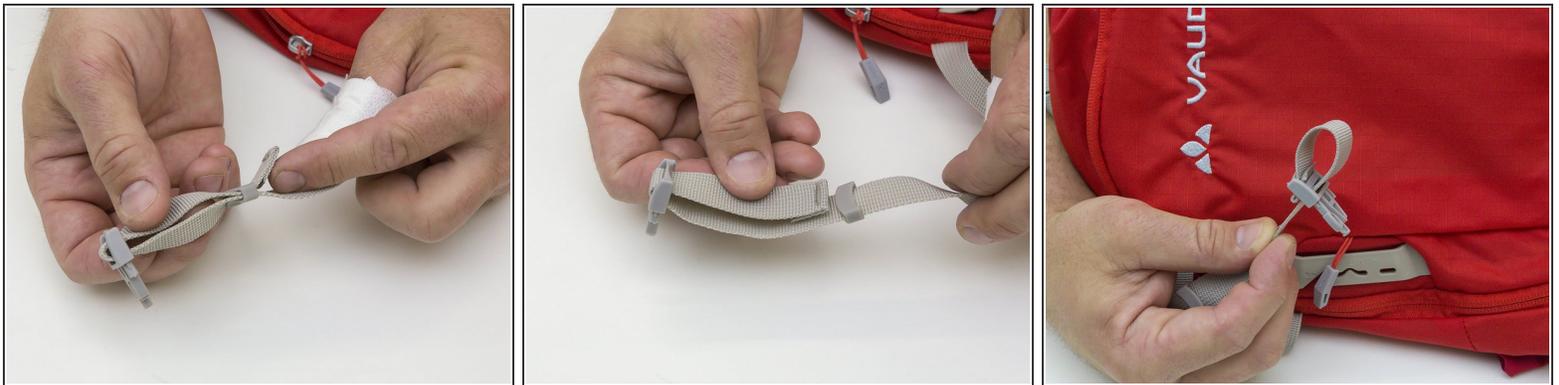

- Remove the broken buckle from the webbing by first pulling the webbing through the locking strap and then unthreading it from the buckle.
- ⓘ Use a screwdriver or tweezers to help pull the webbing through, if necessary.

Follow the instructions in reverse order to finish your repair.