




ASUS Q400A-BHI7N03 Key Replacement

This guide shows how to remove a key from the keyboard so that it can be cleaned or replaced.

Written By: Matthew Gold

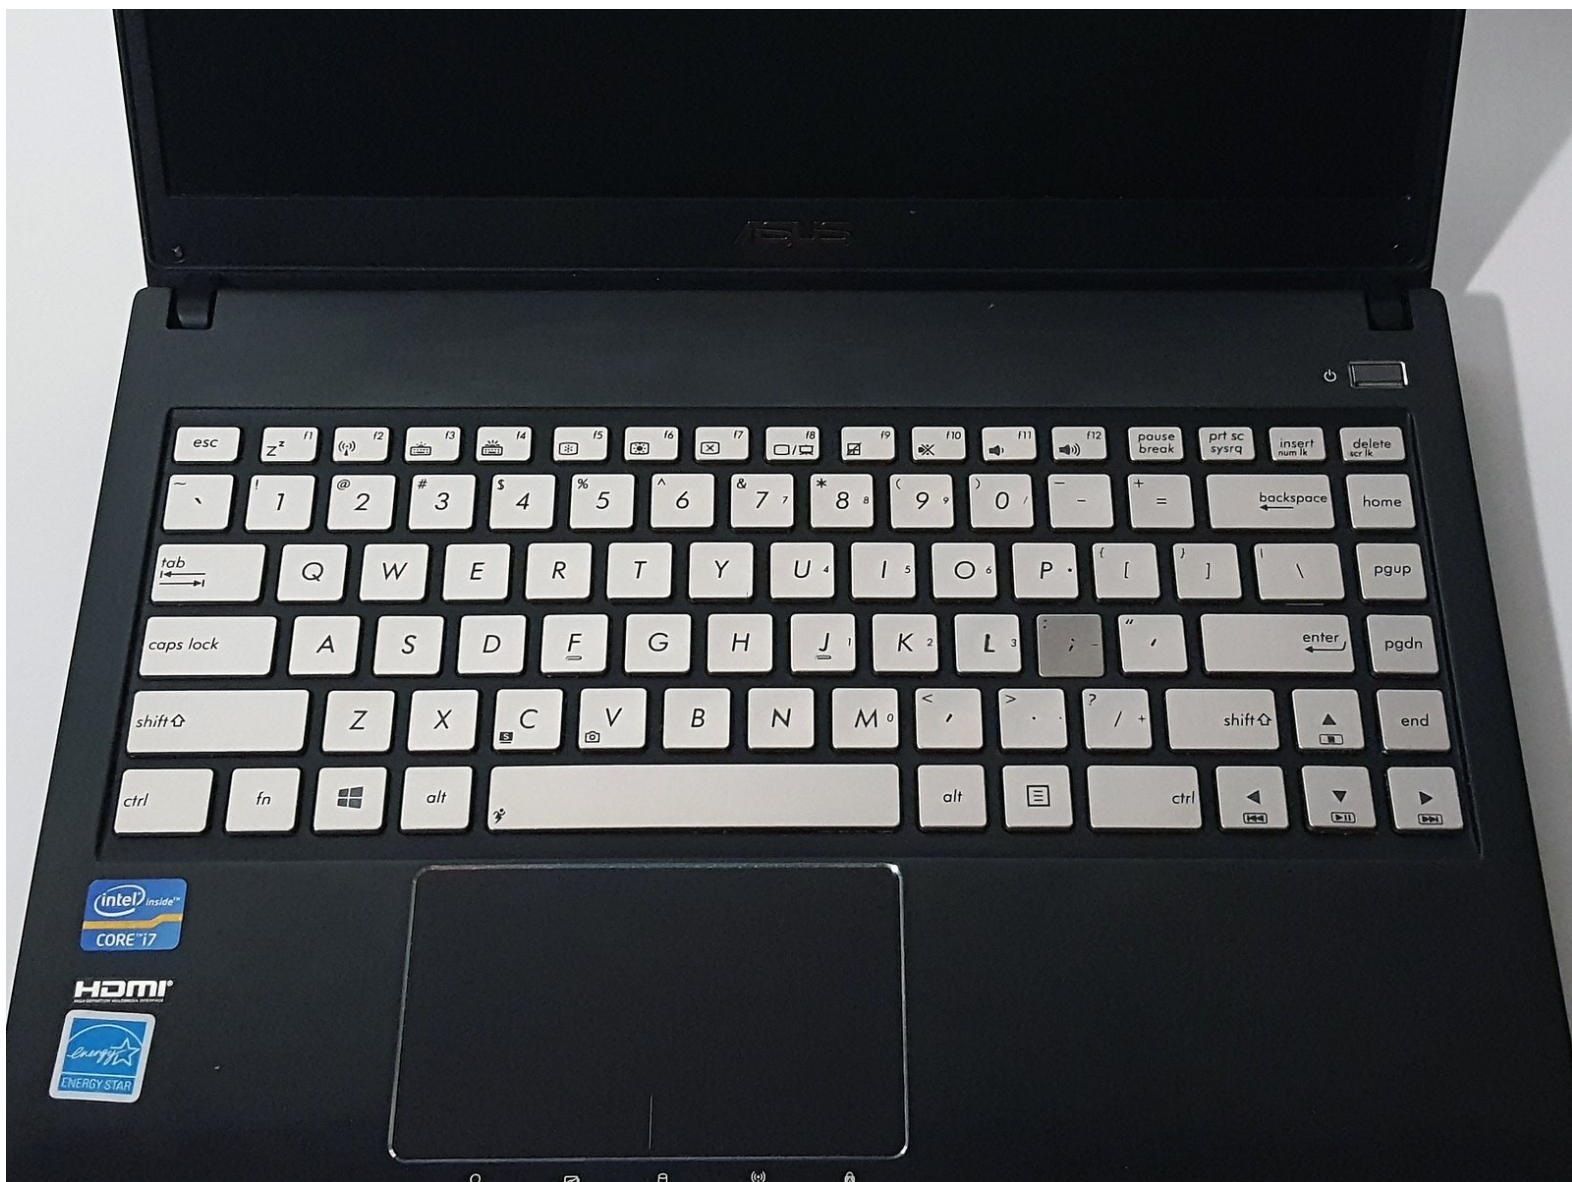

INTRODUCTION

Keys can be dirty and unresponsive. Use this guide to clean under or replace keys.



TOOLS:



- [Metal Spudger](#) (1)
-

Step 1 — Key



- To remove a key, insert the opening tool in the small gap at the top right corner of the key.
- Pry off the key by pulling the tool up until the key pops off.
- If the key is still connected at the bottom, wiggle the key from side to side until it comes off.

Step 2

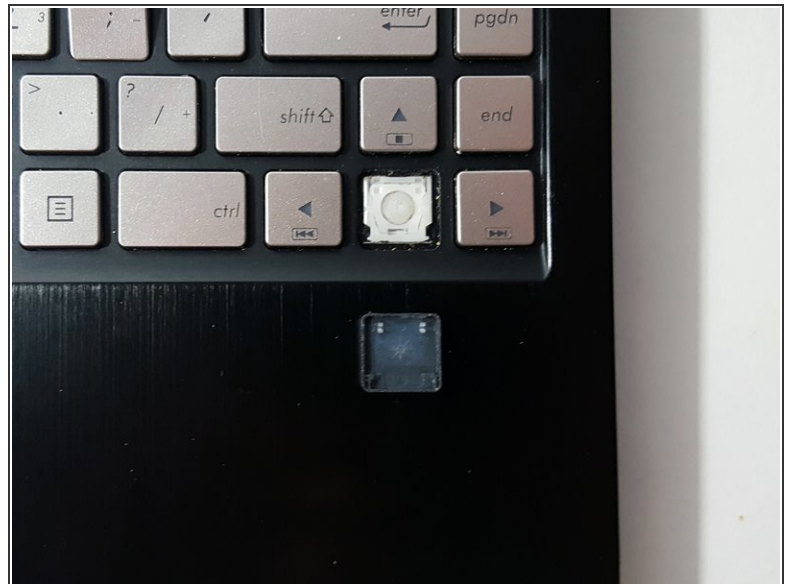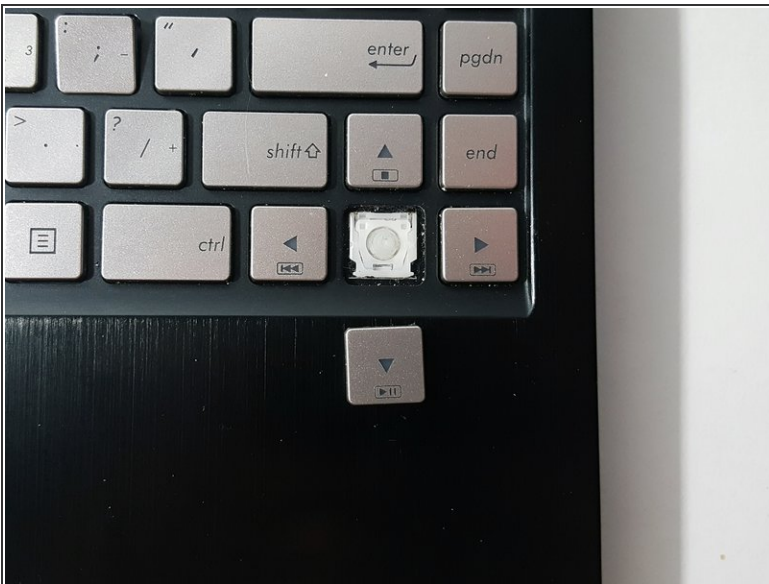


- If there is dirt under the key, use an air canister to clean it up.



Do not use any liquids to clean.

Step 3

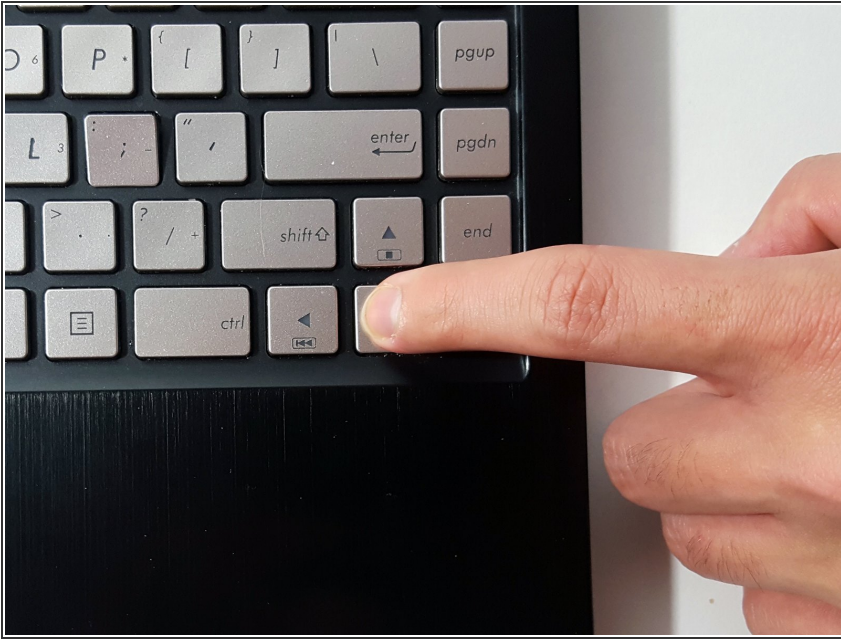

- To put the key back in, line it up with the area it came from and push it back in. *There will be an audible click when it is correctly inserted.*