




P775DM3 M.2 SSD replacement

Written By: Felice Suglia



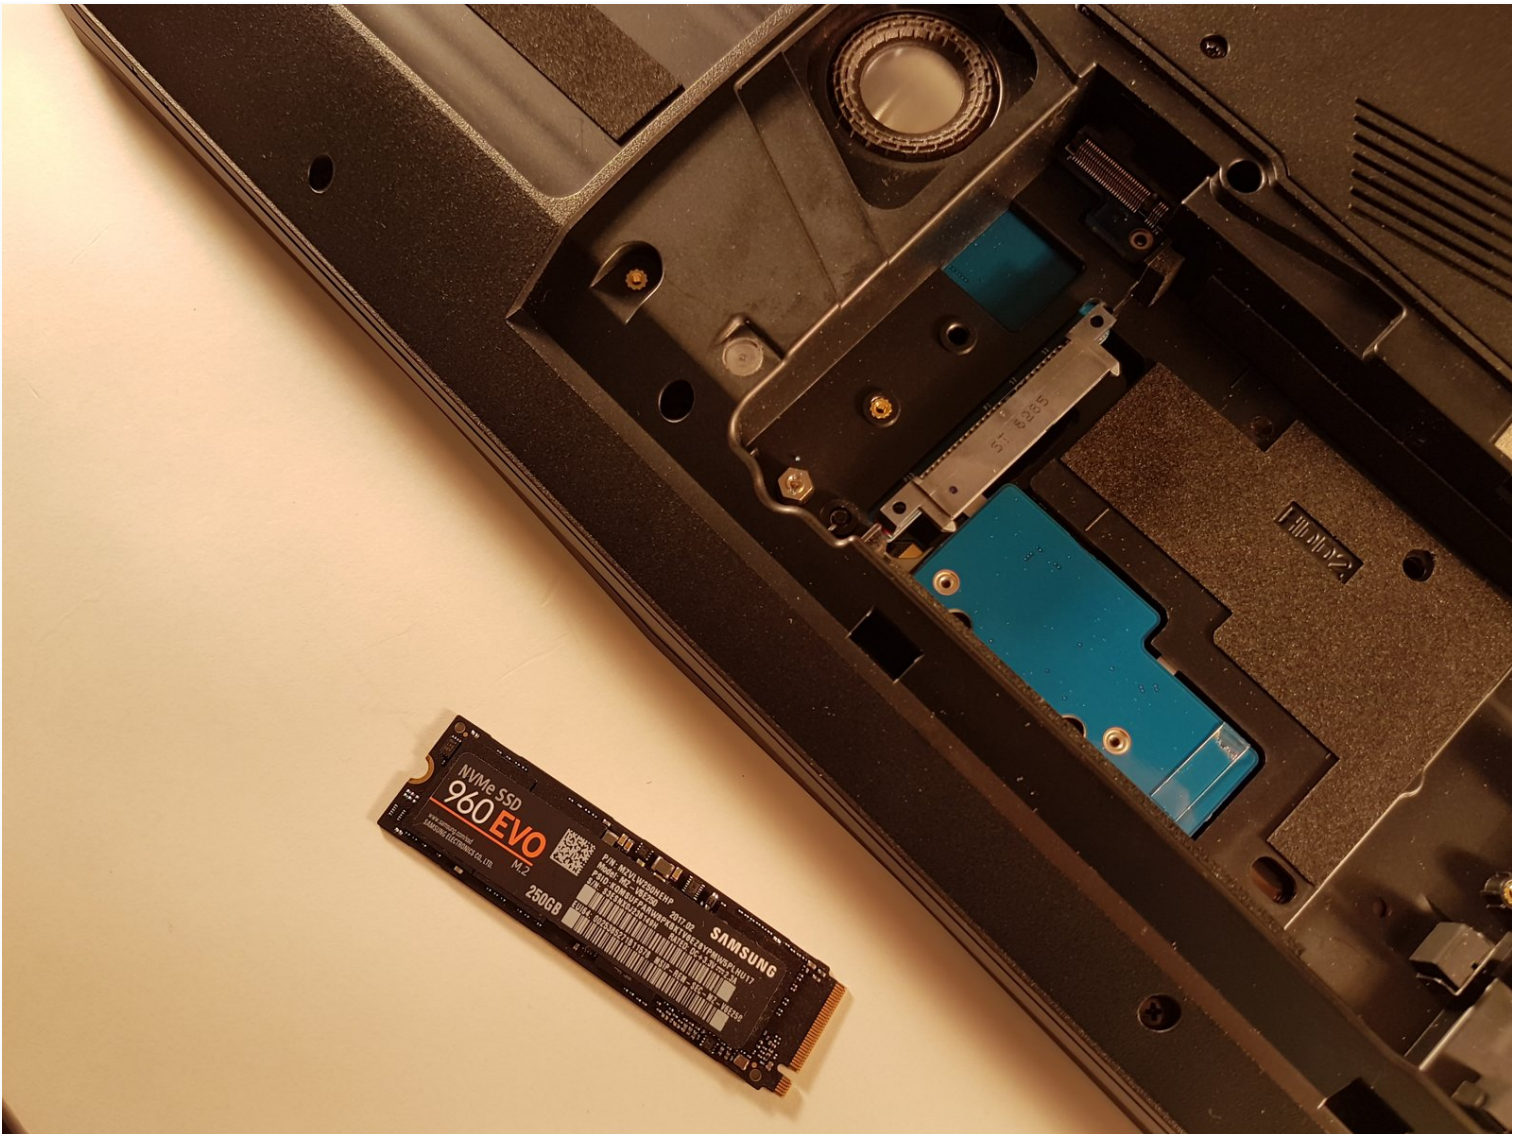

TOOLS:

Phillips #0 Screwdriver (1)





PARTS:

Pièces pour why! P775DM3 CH (1)



Pièces pour why! P775DM3 EU (1)

Step 1 — Battery

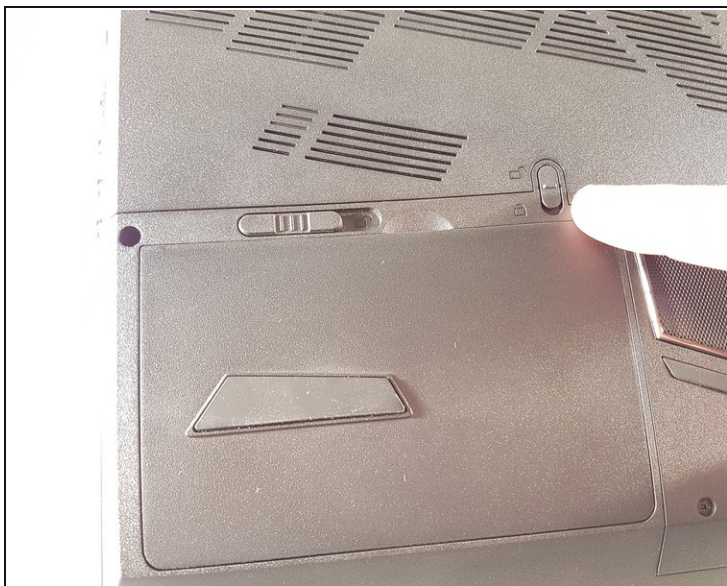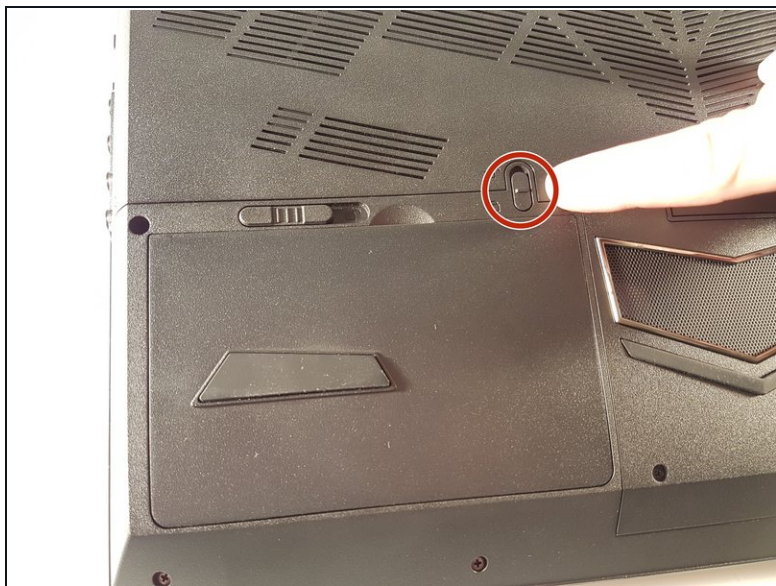


- Unlock the lock circled in red.

Step 2

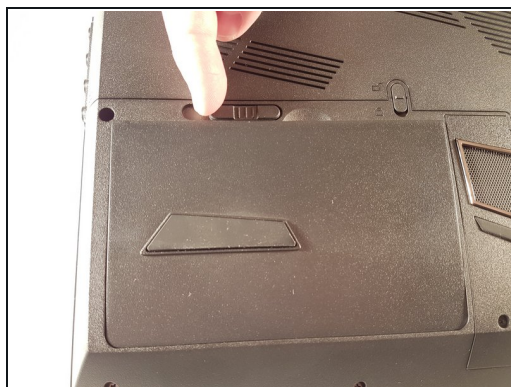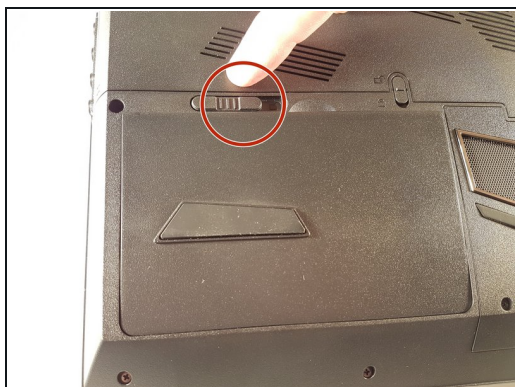

- Lift the battery while unlocking the lock circled in red.

Step 3 — Disk access

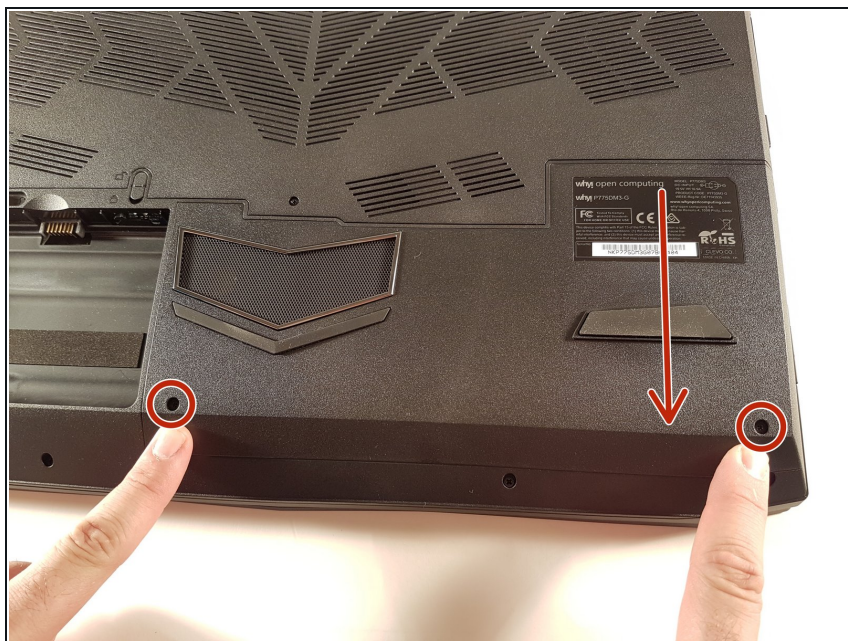



- Unscrew the two screws circled in red.
- Slide the plate in the direction of the arrow.

Step 4





- Lift the plate

Step 5 — M.2 SSD

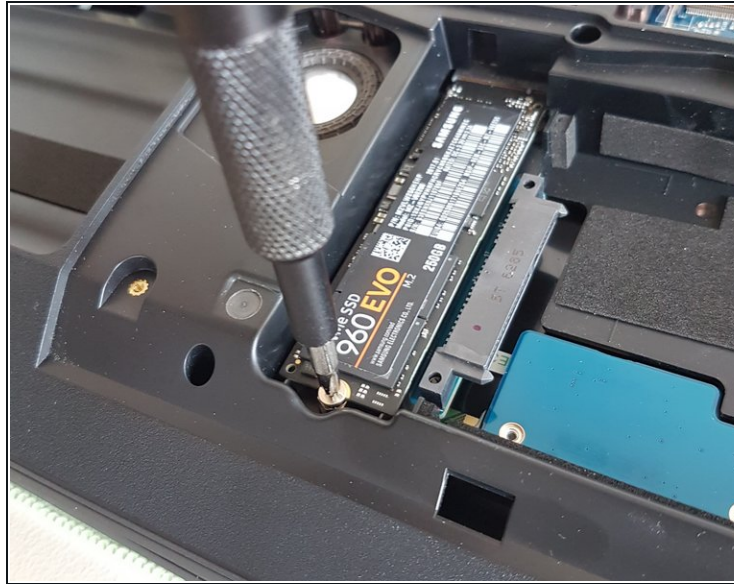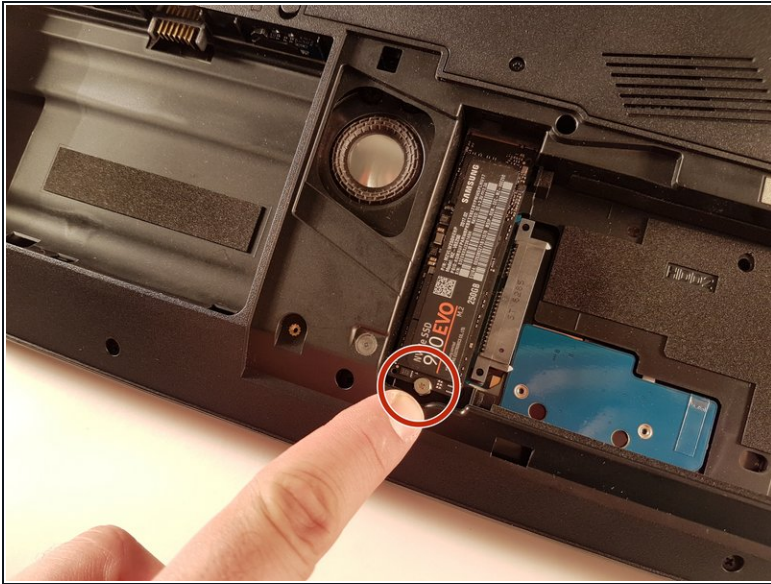

- Unscrew the screw circled in red.

Step 6

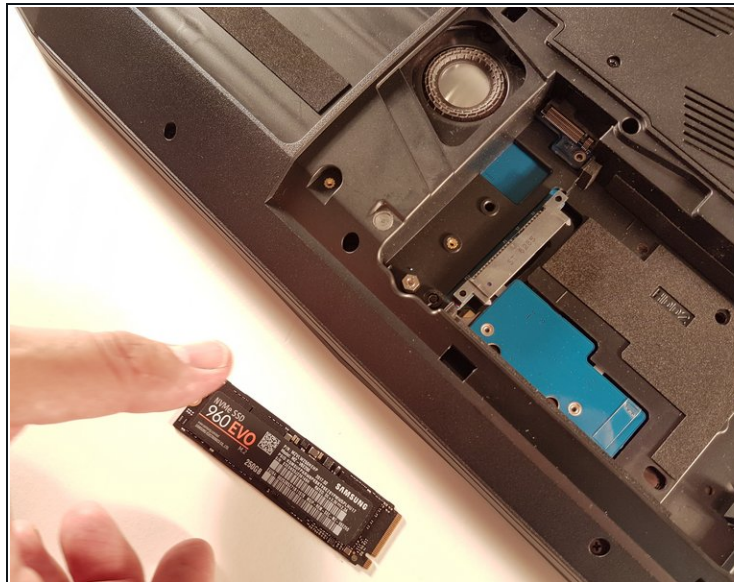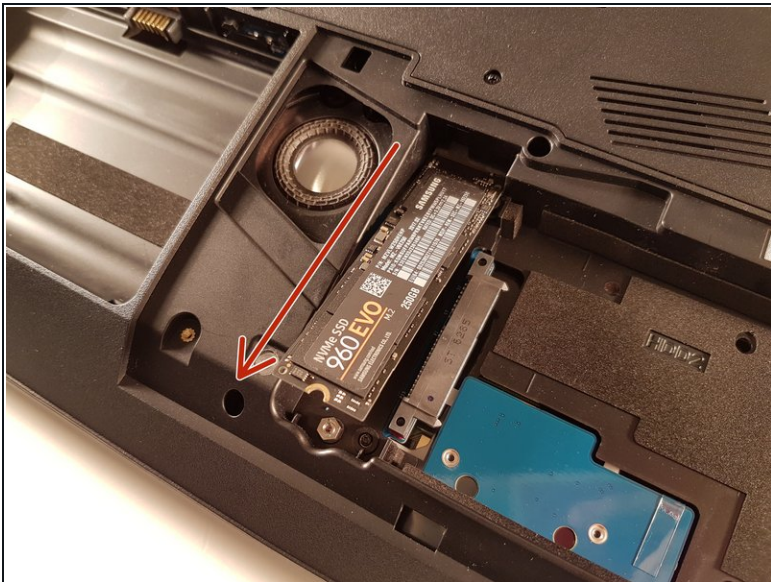

- Pull the SSD in the direction of the red arrow.

To reassemble your device follow the following instructions in reverse order