




# P775DM3 Cooler Replacement

Written By: Felice Suglia

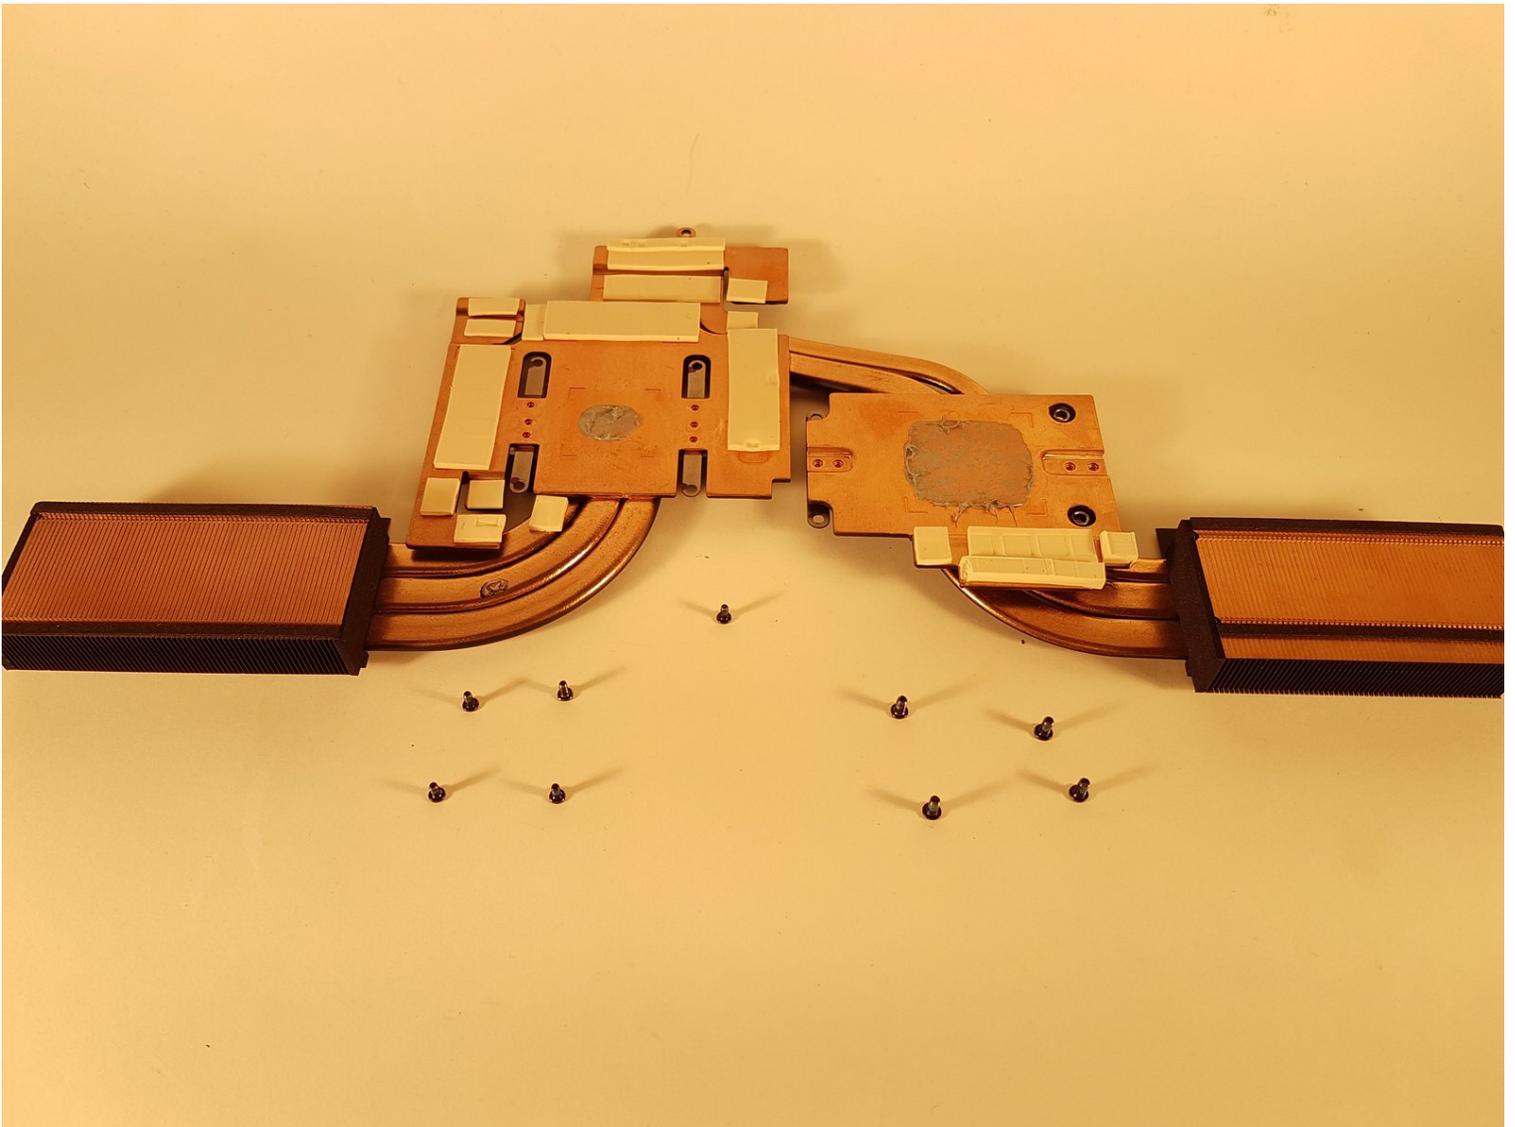

 **TOOLS:**


Phillips #0 Screwdriver (1)

 **PARTS:**

Pièces pour why! P775DM3 CH (1)


Pièces pour why! P775DM3 EU (1)

**Step 1 — Battery**

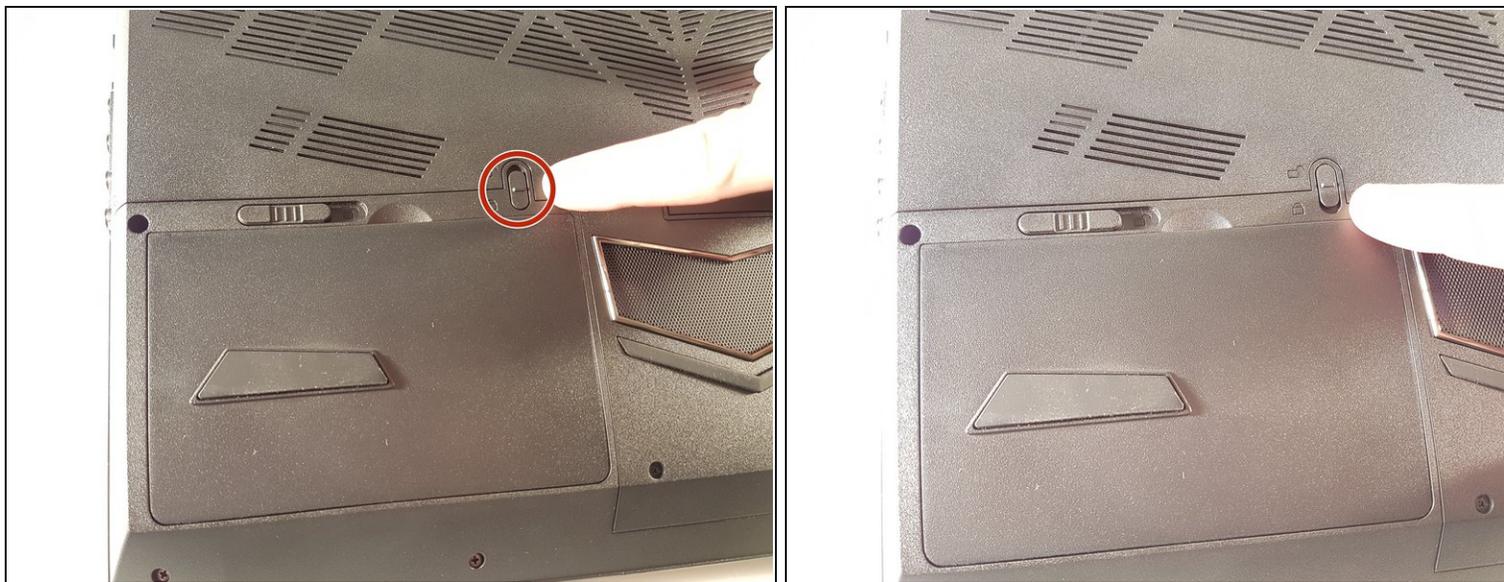

- Unlock the lock circled in red.

**Step 2**

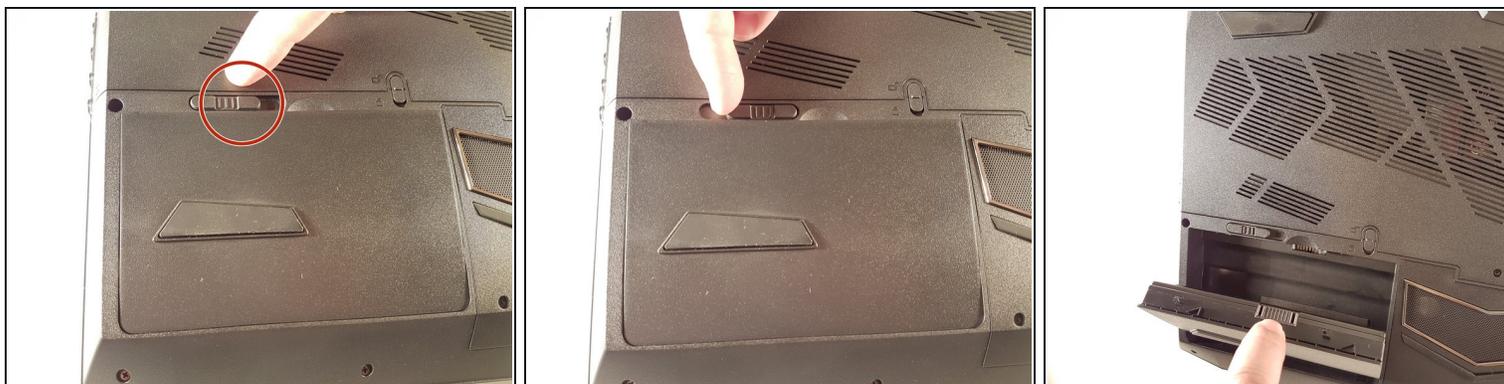


- Lift the battery while unlocking the lock circled in red.

### Step 3 — Access to major components




- Unscrew the five screws circled in red.

### Step 4

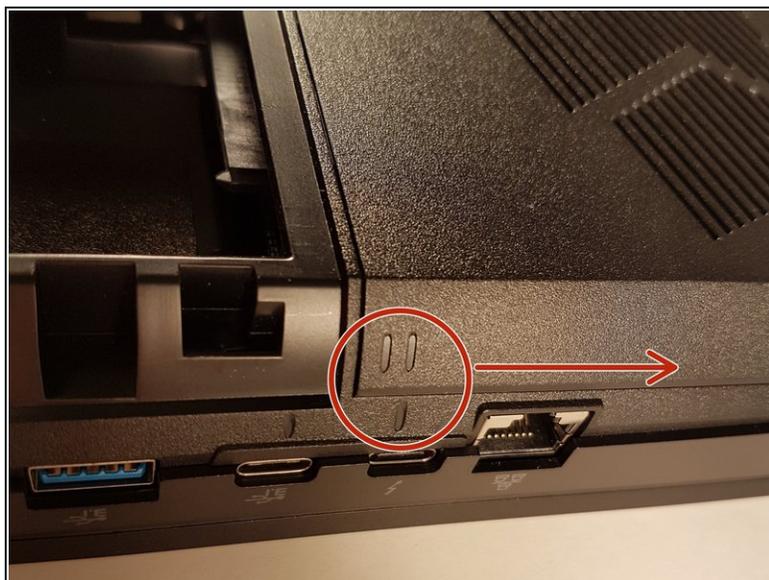


- Slide the plate in the direction of the red arrow.

## Step 5

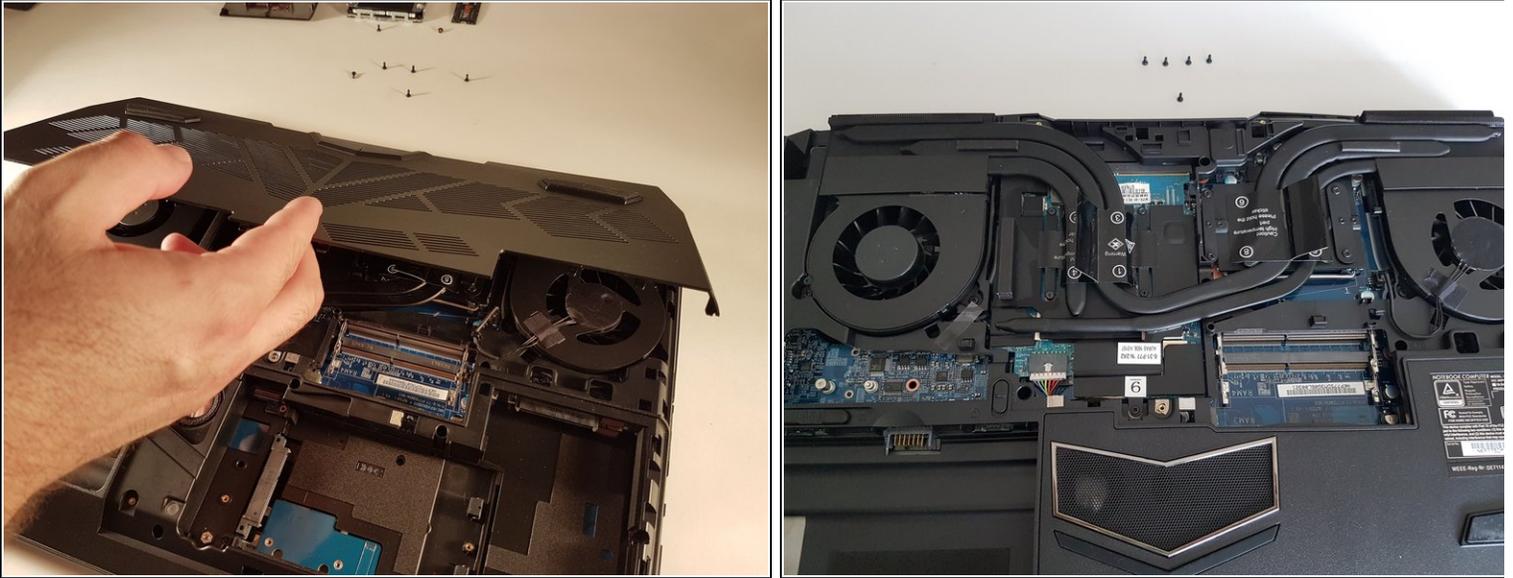

- Lift the plate.

## Step 6 — Cooler

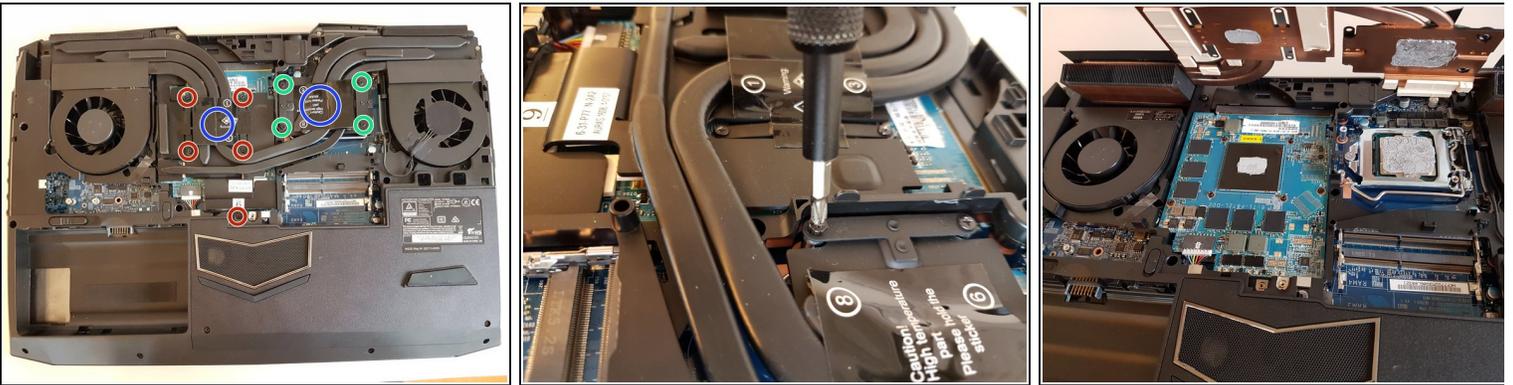

- Unscrew the four large screws circled in green
- Unscrew the five small screws circled in red
- Lift the cooler with the two tabs circled in blue

To reassemble your device follow the following instructions in reverse order