



Vostro 1720 Memory Module Replacement

Written By: Johnathan Hammond



INTRODUCTION

In this guide, we will be showing you how to remove and replace the Memory Modules.



TOOLS:

- [Phillips #0 Screwdriver](#) (1)
-

Step 1 — Sliding the Latches



- Slide the battery lock latches into the unlocked position.

Step 2 — Slide the Battery



- Slide the battery toward the back of the computer to remove.

Step 3 — Remove the Screws




- Remove the eight screws from the access panel.

Step 4 — Lifting the Access Panel



- Lift the edge of the access panel that is closest to the center of the computer.

Step 5 — Remove the Access Panel

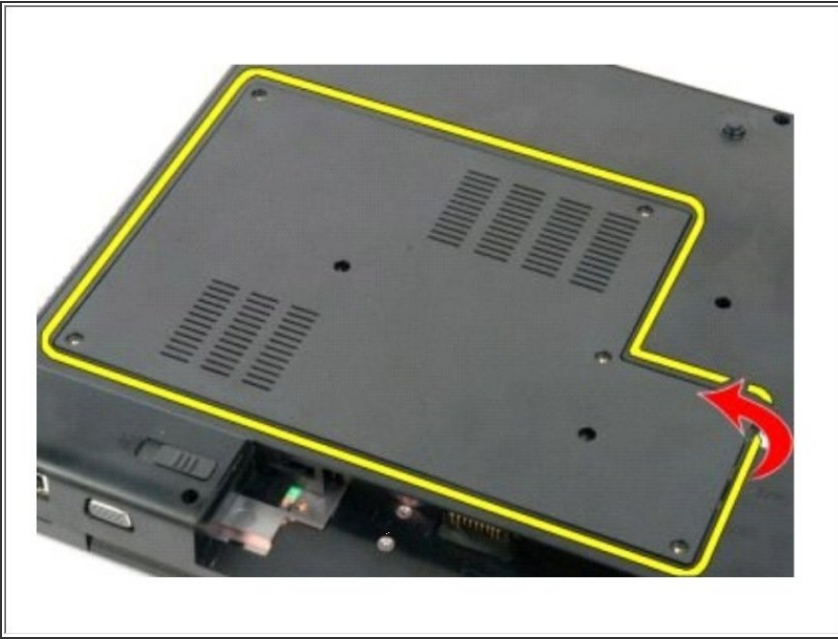

- Remove the access panel.

Step 6 — Removing the Memory Module



- If applicable, remove the top memory module by using your fingertips to carefully spread apart the securing clips on each end of the top memory module connector until the memory module pops up.

Step 7 — Sliding the Memory Module



- Slide the memory module out of the socket.

Step 8 — Spreading apart the Clips



- If applicable, remove the bottom memory module by using your fingertips to carefully spread apart the securing clips on each end of the memory module connector until the memory module pops up.

Step 9 — Sliding the Memory Module



- Slide the memory module out of the socket.