




Dell Inspiron 13-7353 Fan Replacement

This guide will help you accomplish replacing the fan on a dell inspiron 13-7353 laptop.

Written By: Stephany Marin Restrepo

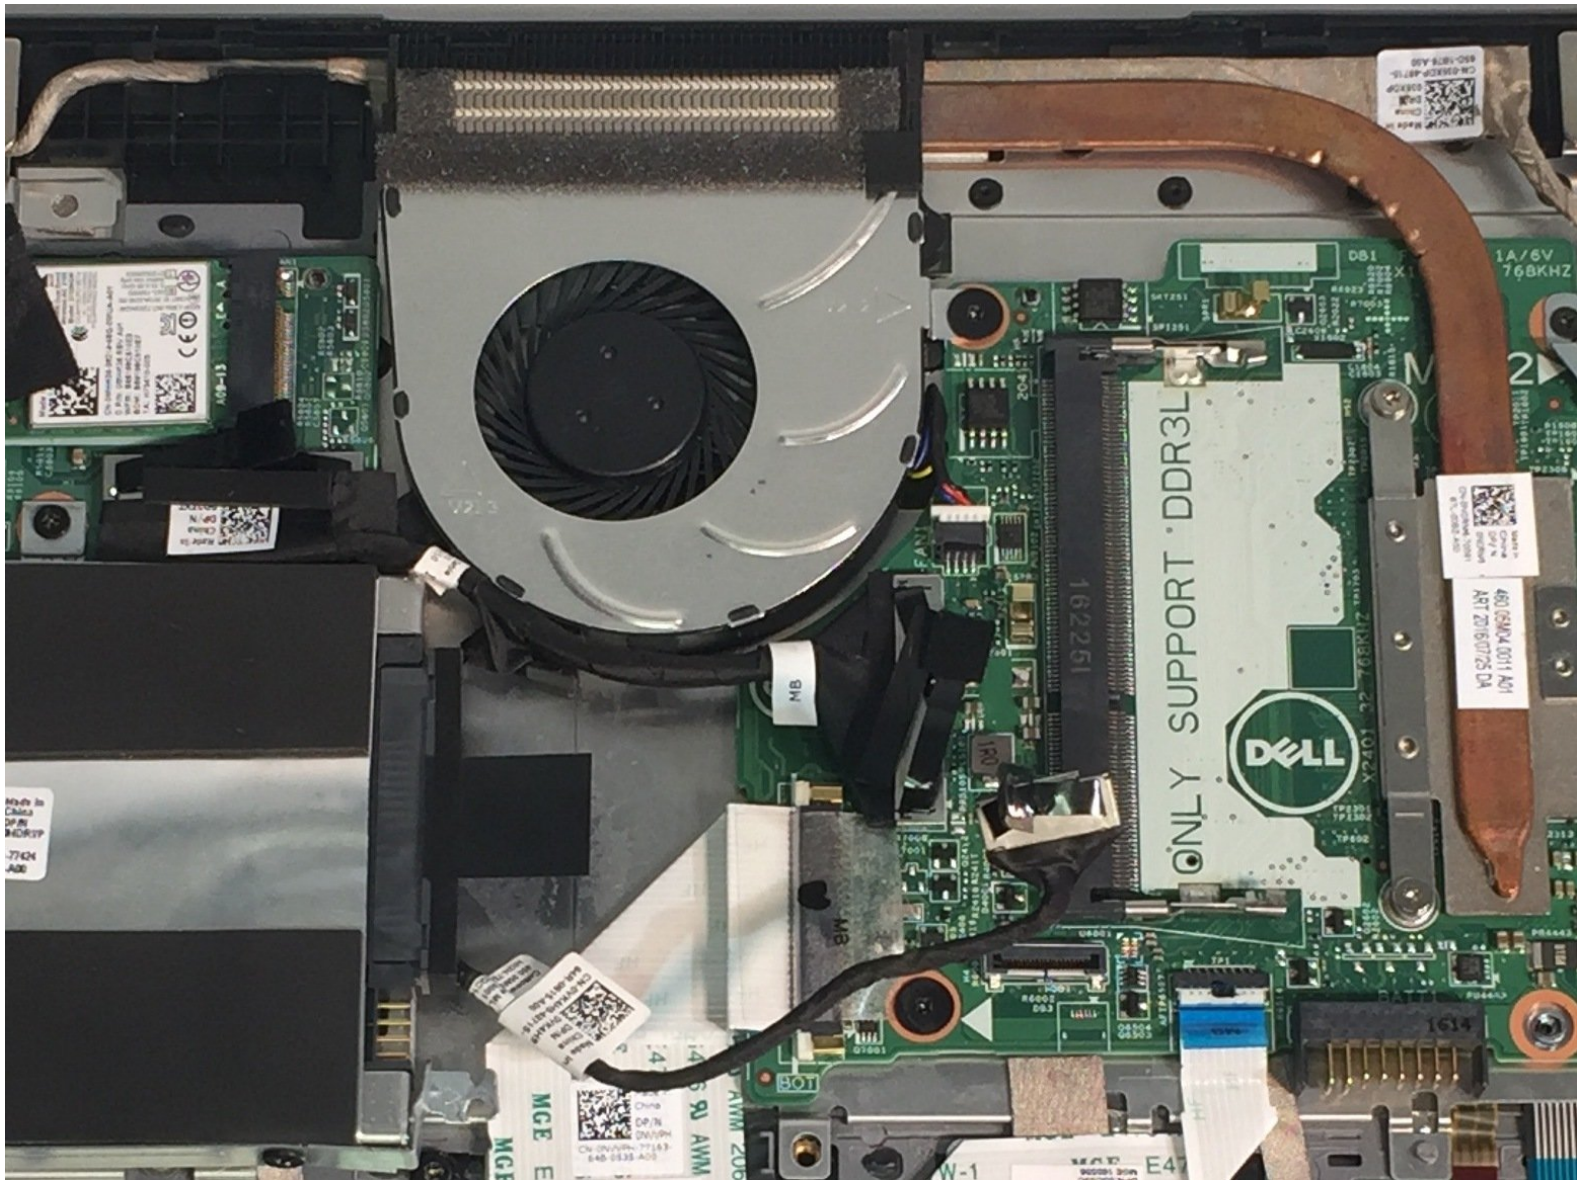

INTRODUCTION


If you notice your laptop is overheating, then this guide may be able to help. This guide will show you how to replace the fan in a few steps.



TOOLS:

- [Phillips #0 Screwdriver](#) (1)
 - [Phillips #1 Screwdriver](#) (1)
-


Step 1 — Flip the Computer

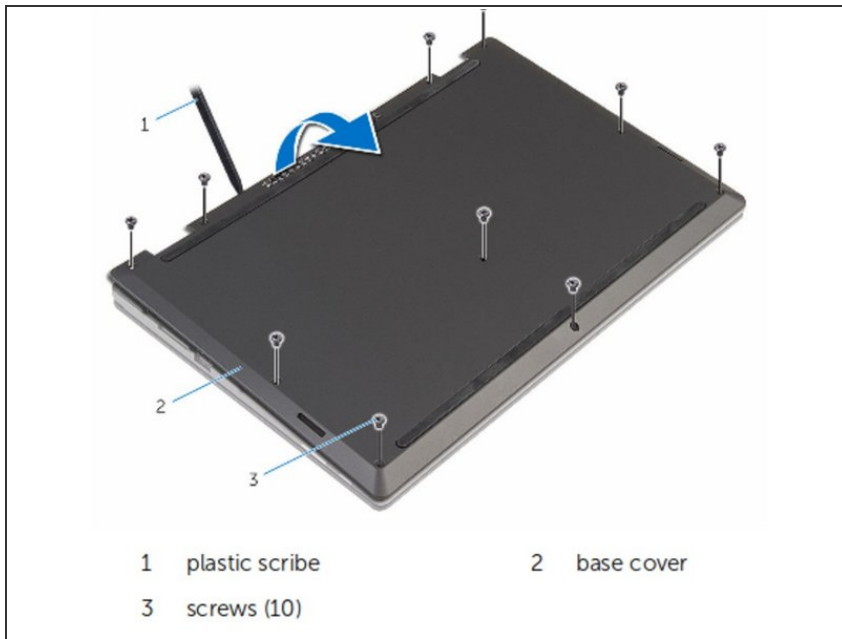

⚠ WARNING: Please read the safety information shipped with your computer and follow recommended steps before working inside your computer. When finished working inside your computer, follow the instructions included in the safety information.


- Close the computer display and turn the computer over so that the base of the computer is facing up.

Step 2 — Secure the Base

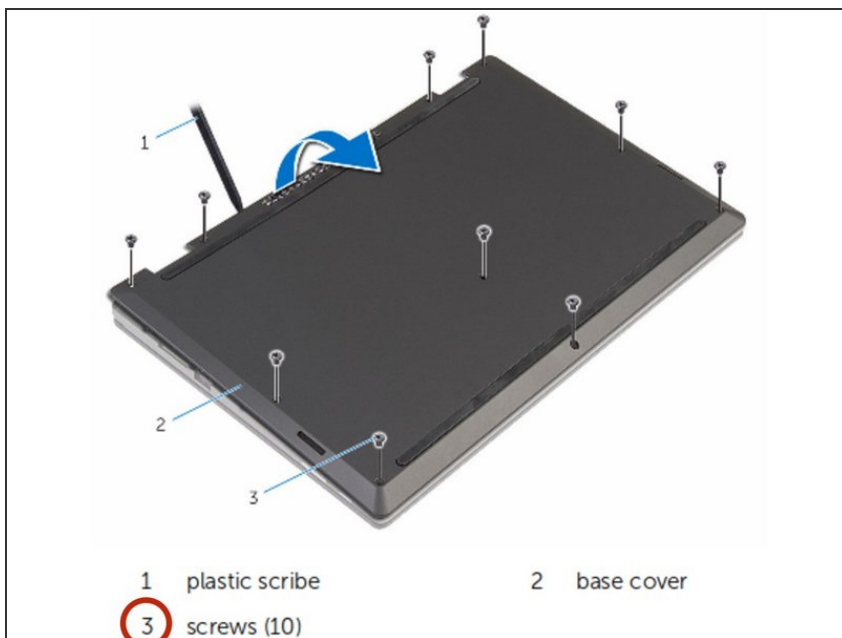



- Remove the ten screws that secure the base cover to the base of the computer.

Step 3 — Pry the Base cover

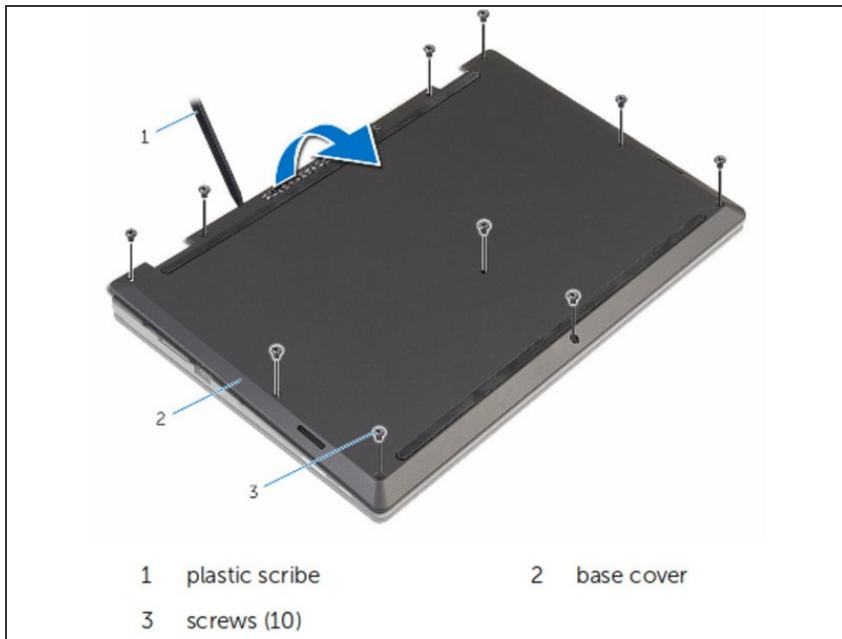

- Using a plastic scribe (plastic opening tool), pry the base cover off of the base of the computer.



Step 4 — RAM

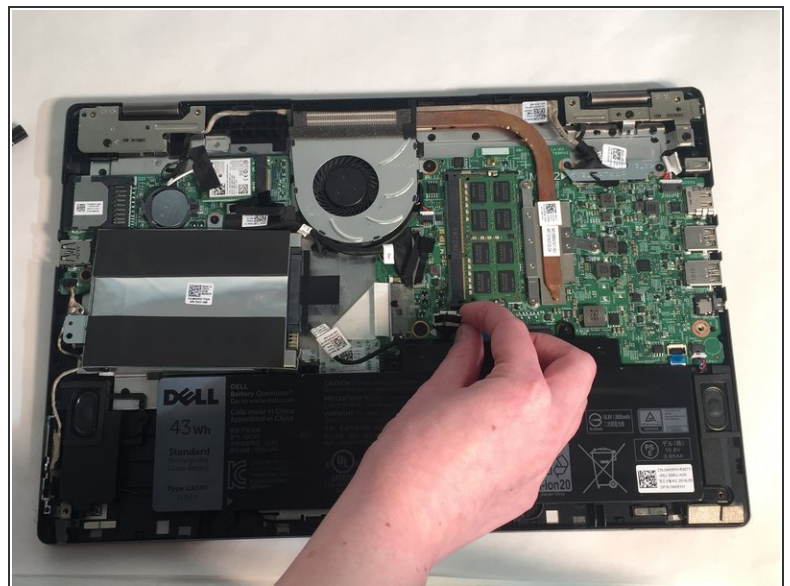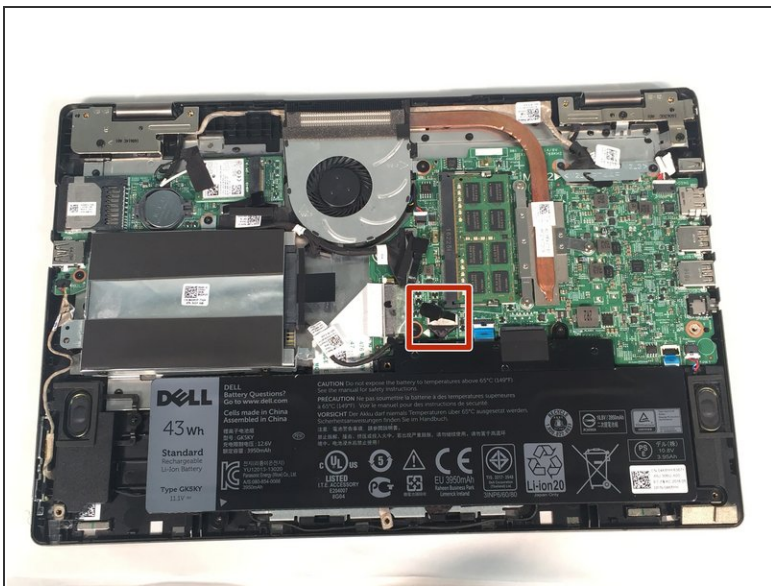

i Before opening your device, ensure that all data is backed up on a hard drive to prevent data loss.




- Loosen and then unplug the hard drive cable.

Step 5

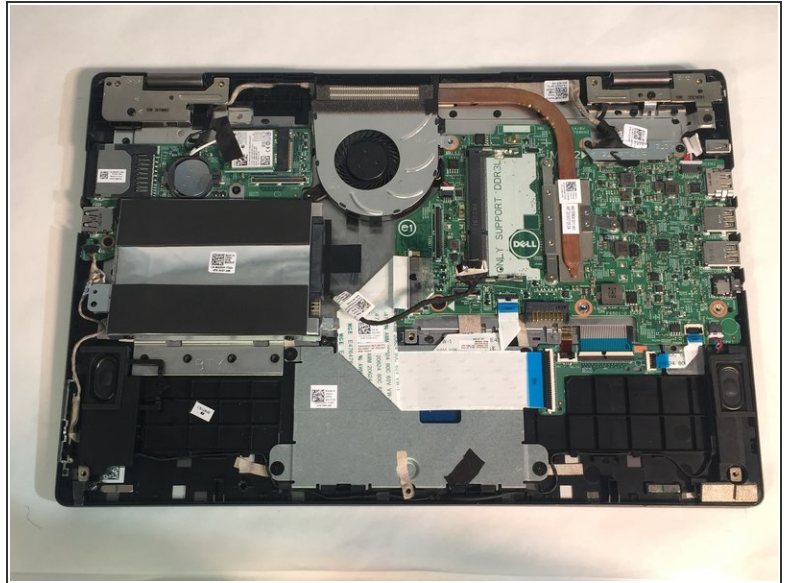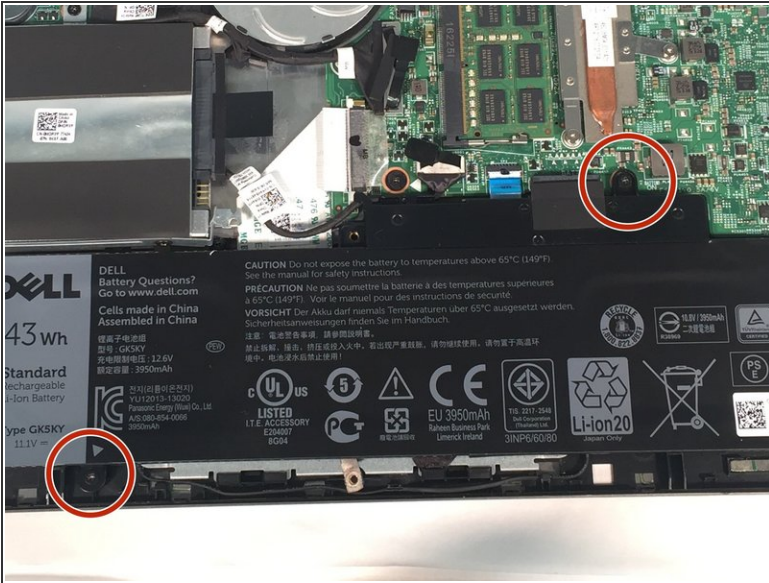




- Remove the two M2 3mm screws attaching the battery using the Phillips #1 screwdriver.
- Remove the battery.

Step 6

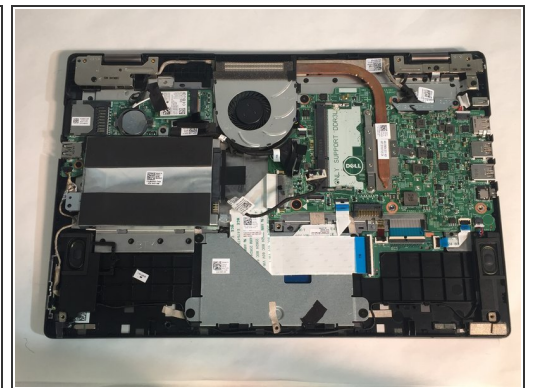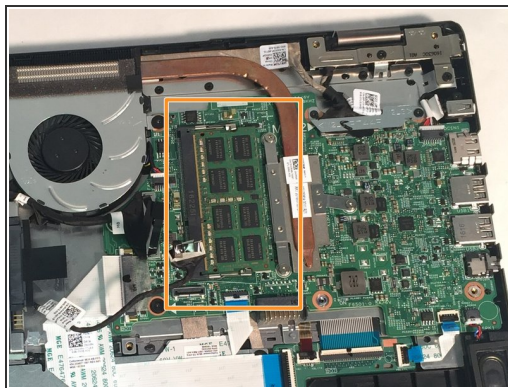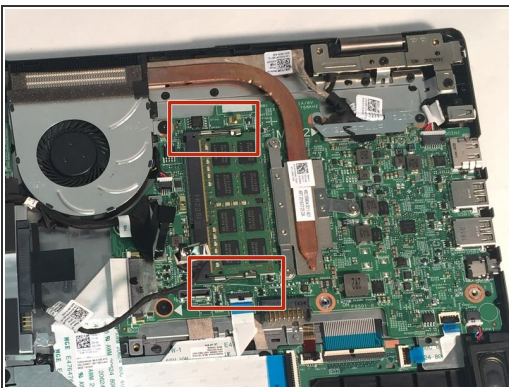



- Pry open the two clips.
- Gently lift the RAM stick and pull it out of the motherboard.

Step 7 — Fan

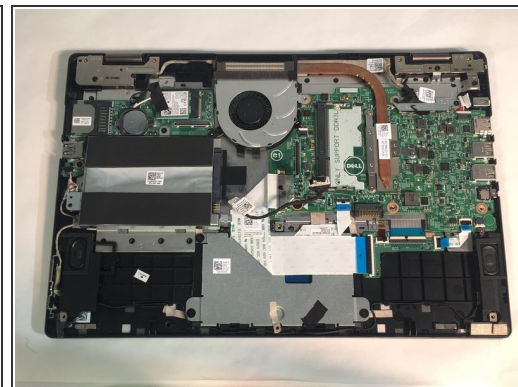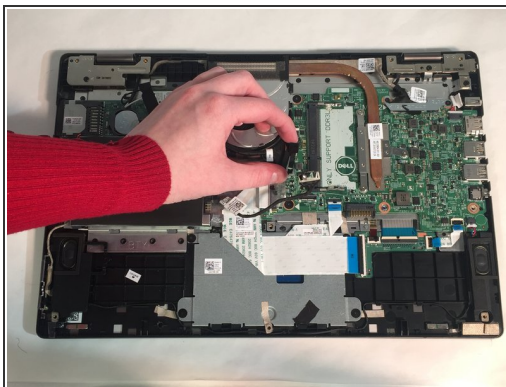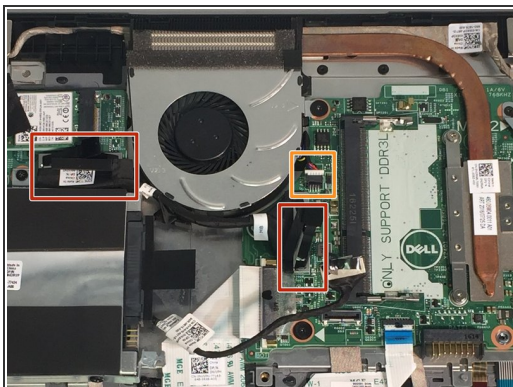

- Unplug the daughterboard cable in two places, then remove the daughterboard.
- Unplug the fan cable.

Step 8

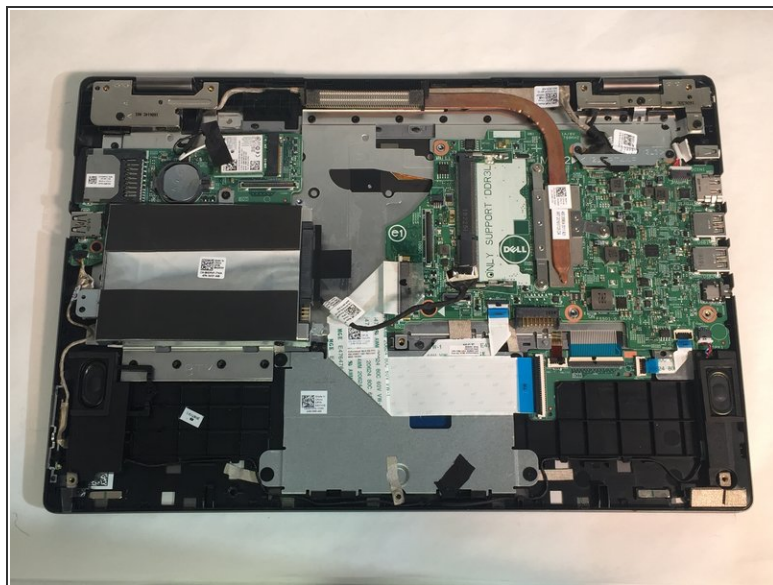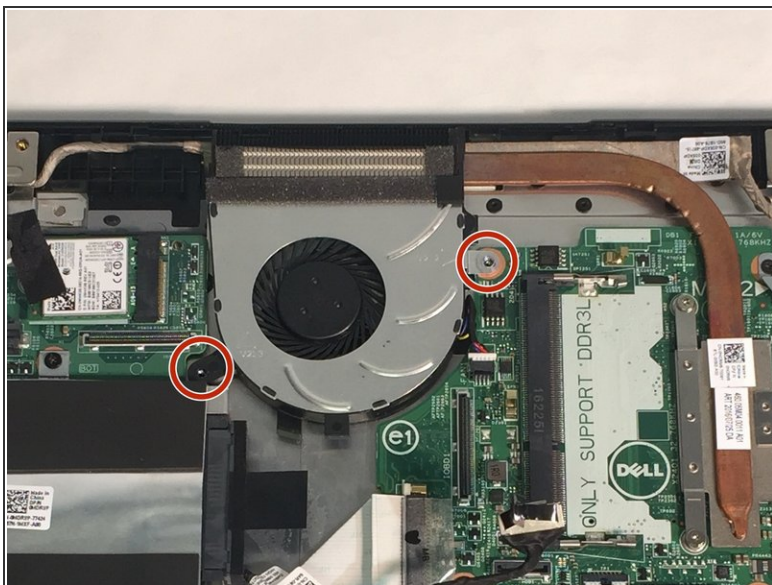

- Remove two 3mm screws from the cooling fan using the Phillips #1 screwdriver.
- Remove the cooling fan from the laptop.

To reassemble your device, follow these instructions in reverse order.