


Samsung Galaxy S6 Edge Motherboard Components Replacement

This is a prerequisite only guide.

Written By: Sam Goldheart

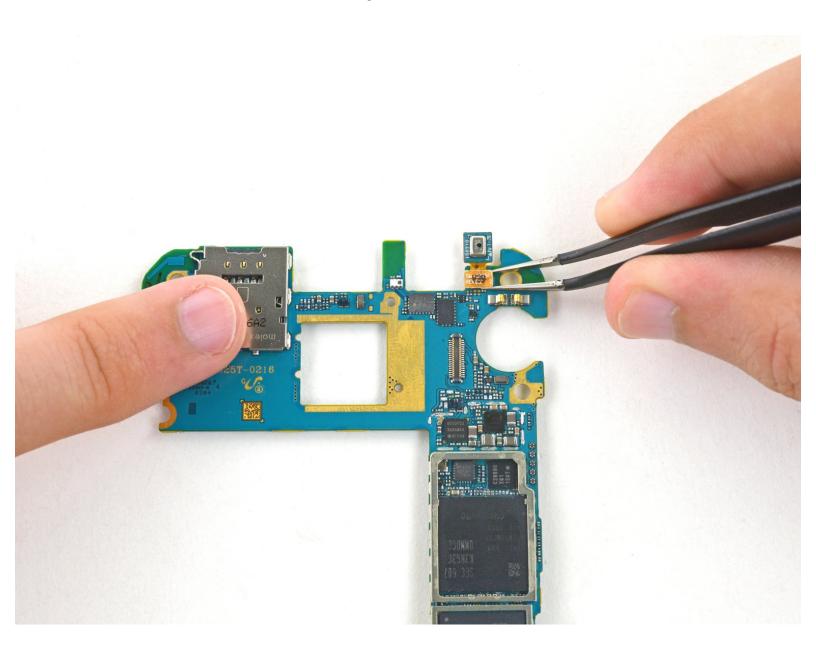

This document was generated on 2020-11-28 06:48:02 AM (MST).

INTRODUCTION

This is a prerequisite only guide, meant to be part of other guides.


These steps include removing parts off of the motherboard.





TOOLS:

- Spudger (1)
- Tweezers (1)

Step 1 — Motherboard Components










- Using the flat end of a spudger, pry up the front facing camera's connector.
- Carefully remove the front facing camera from the motherboard.

Step 2








- Using a spudger, pry up the connector for the rear facing camera from the motherboard.
- Remove the rear facing camera from the motherboard.

Step 3

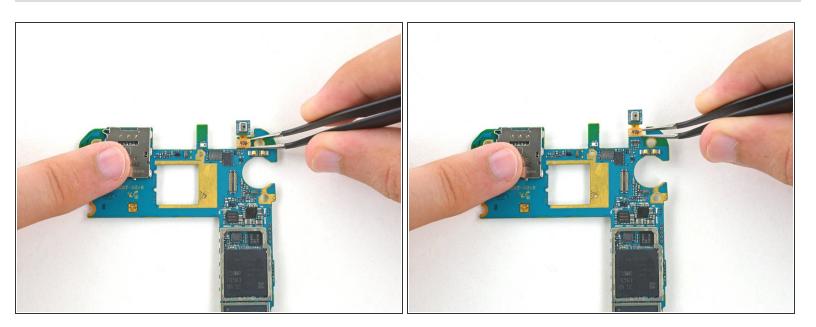

Remove the microphone from the motherboard.

To reassemble your device, follow these instructions in reverse order. Follow <u>this guide</u> to reinstall the rear glass.