

PlayStation 3 Slim Laser lens Replacement

PlayStation 3 Slim Laser lens Replacement

Written By: ZFix





laser lens replacement



INTRODUCTION

Video tutorial - how to replace Laser Lens only:

[video: https://www.youtube.com/watch?v=GvL3r8N1-dc]



TOOLS:

- Metal Spudger (1)
- Phillips #1 Screwdriver (1)
- Spudger (1)
- T8 Torx Security Bit Screwdriver (1)


Step 1 — Blu-ray Disc Drive






(i) If present, remove the pieces of tape securing the cables to the body of the Blu-ray drive.

Step 2

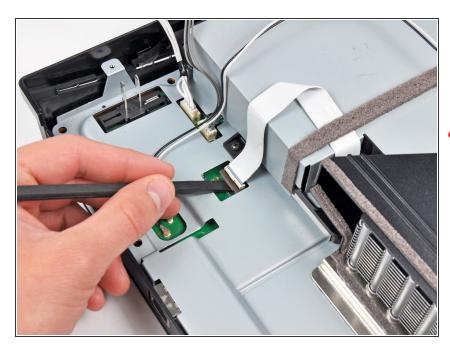

- Use the flat end of a spudger or your fingernail to flip up the retaining flap on the Blu-ray ribbon cable socket.
- ⚠ Be sure you are prying up on the movable retaining flap, not the socket itself.

Step 3

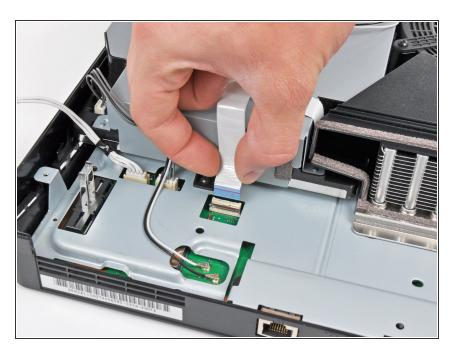

 Pull the Blu-ray ribbon cable straight up and out of its socket.

Step 4



 Pull the Blu-ray power cable straight up to lift its connector out of the socket on the Blu-ray drive.

Step 5



 Remove the single 9.5 mm Phillips screw securing the Blu-ray drive to the lower case.

Step 6





- Lift the Blu-ray drive slightly by its right edge to dislodge the control board from its housing.
- Remove the Blu-ray drive from the PS3.
- After you reinstall the Blu-ray drive, be sure the control board is firmly seated in the lower case before proceeding.
- If replacing the Blu-ray drive with a new drive, swap the circuit board from your old drive into the new drive.

To reassemble your device, follow these instructions in reverse order.